

# Hand-held Pendant Stations/ Handwheels



**EUCHNER**

More than safety.

# EUCHNER

More than safety.



Headquarters in Leinfelden-Echterdingen



Logistics center in Leinfelden-Echterdingen



Production location in Unterböhringen

## Internationally successful – the EUCHNER company

EUCHNER GmbH + Co. KG is a world-leading company in the area of industrial safety technology. EUCHNER has been developing and producing high-quality switching systems for mechanical and systems engineering for more than 60 years.

The medium-sized family-operated company based in Leinfelden, Germany, employs around 800 people around the world.

18 subsidiaries and other sales partners in Germany and abroad work for our international success on the market.

## Quality and innovation – the EUCHNER products

A look into the past shows EUCHNER to be a company with a great inventive spirit. We take the technological and ecological challenges of the future as an incentive for extraordinary product developments.

EUCHNER safety switches monitor safety doors on machines and installations, help to minimize dangers and risks and thereby reliably protect people and processes. Today, our products range from electromechanical and electronic components to intelligent integrated safety solutions. Safety for people, machines and products is one of our dominant themes.

We define future safety technology with the highest quality standards and reliable technology. Extraordinary solutions ensure the great satisfaction of our customers.

The product ranges are subdivided as follows:

- ▶ Transponder-coded Safety Switches
- ▶ Transponder-coded Safety Switches with guard locking
- ▶ Multifunctional Gate Box MGB
- ▶ Access management systems (Electronic-Key-System EKS)
- ▶ Electromechanical Safety Switches
- ▶ Magnetically coded Safety Switches
- ▶ Enabling Switches
- ▶ Safety Relays
- ▶ Emergency Stop Devices
- ▶ Hand-Held Pendant Stations and Handwheels
- ▶ Safety Switches with AS-Interface
- ▶ Joystick Switches
- ▶ Position Switches



## Hand-held Pendant Stations/Handwheels

---









<b>General</b>	<b>4</b>
About this catalog	4
How can I find the right product?	4
Standards and approvals	5
<b>Hand-held pendant stations</b>	<b>6</b>
Function and technology used in hand-held pendant stations	6
Hand-held pendant stations HBA	10
Hand-held pendant stations HBM	20
Hand-held pendant stations HBL	24
<b>Hand-held pendant station kit</b>	<b>29</b>
Hand-held pendant station HBA kit	29
Hand-held pendant station HBM kit	37
Hand-held pendant station HBL kit	41
<b>Accessories for hand-held pendant stations HBA</b>	<b>45</b>
<b>Accessories for hand-held pendant station kit</b>	<b>47</b>
Accessories for hand-held pendant station kit, all designs	48
Accessories for hand-held pendant station HBA/HBM kit	54
Accessories for hand-held pendant station HBL kit	56
<b>Holders for hand-held pendant stations</b>	<b>58</b>
<b>Electronic handwheels</b>	<b>60</b>
Function and technology used in handwheels	60
Handwheel HKB	62
Handwheel HKC	64
Handwheel HKD	66
Handwheel HWA	68
Handwheel HWB	70
<b>Accessories for handwheels</b>	<b>72</b>
<b>Appendix</b>	<b>74</b>
Dimension drawing – HBA housing top shell	74
Dimension drawing – HBM housing top shell	75
Assembly drawings – HBL housing	75
Request form for hand-held pendant stations HBA without handwheel	76
Request form for hand-held pendant stations HBA with handwheel	77
Request form for hand-held pendant stations HBM without handwheel	78
Request form for hand-held pendant stations HBM with handwheel	79
Request form for hand-held pendant stations HBL	80
<b>Item index</b>	<b>81</b>
Index by item designation	81
Index by order number	83

About this catalog

The *Hand-held Pendant Stations/Handwheels* catalog provides you with an overview of our HBA, HBM and HBL series hand-held pendant stations as well as our HK and HW series handwheels.

Due to their precision, their ergonomic design and their robustness, these products are the right choice for numerous applications. You will find the technical data after the product overview.


You will find the following series and accessories in this catalog:

Hand-held pendant stations/handwheels											
Hand-held pendant stations						Handwheels					
Complete devices			Kit	Accessories	Holder	Magnetic detent mechanism			Mechanical detent mechanism		Accessories
HBA	HBM	HBL				HKB	HKC	HKD	HWA	HWB	
											
See page 10	See page 20	See page 24	See page 29	See page 45	See page 58	See page 62	See page 64	See page 66	See page 68	See page 70	See page 72

How can I find the right product?

There are two ways you can find the right product:

- 1 If you know the order number or the item designation, look for the product directly in the item index (see page 81 or page 83).
- 2 If you have specific requirements, refine the selection step-by-step with the aid of the table of contents and the selection tables.

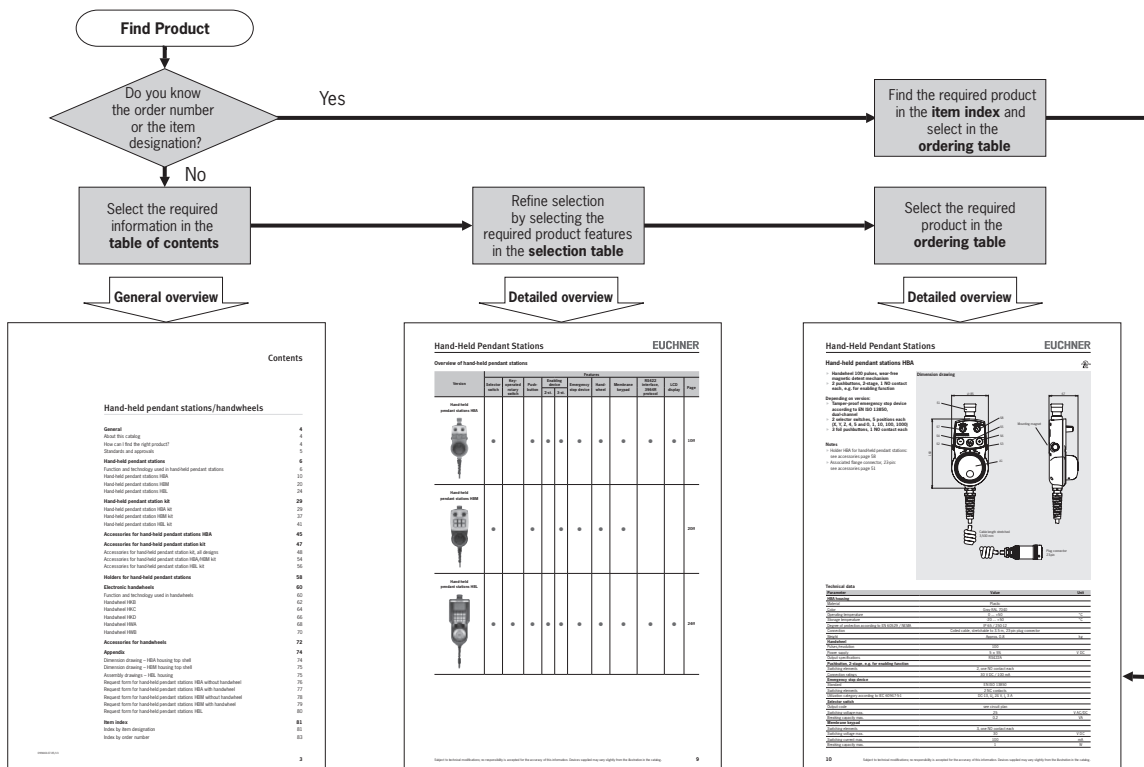

## Standards and approvals

### Standards

Hand-held pendant stations must comply with the requirements of the EMC directive 2004/108/EC. The EMC directive has been implemented in national law in the EU member states and, as a result, is binding for all manufacturers. Detailed requirements on EMC are defined in EN 61000 (electromagnetic compatibility EMC) part 6-2 and 6-4. If the requirements of this standard are met, conformity with the applicable laws and therefore with the EMC directive is assumed. EUCHNER hand-held pendant stations comply with the relevant standards and therefore help you to comply with the requirements during the design of your machinery.

### Approvals

Many of the hand-held pendant stations given in this catalog are listed by Underwriters Laboratories (UL). The approval symbols on the individual pages of the catalog indicate which devices are approved.

This is the UL approval symbol:



Products with this symbol are approved by Underwriters Laboratories (UL, Canada and USA)

## Function and technology used in hand-held pendant stations

The most important machine functions can be monitored, e.g. axis selection and axis movement, can be controlled decentrally using hand-held pendant stations. The freedom of movement of the machine operator is increased, and the operator can monitor and control processes without being tied to a fixed control panel.

In addition to the control function, hand-held pendant stations can also have a safety function. For this purpose, the hand-held pendant stations are equipped with emergency stop buttons and enabling switches.

### Hand-held pendant stations with enabling function

Hand-held pendant stations with enabling function are essentially similar to classic enabling switches.

Enabling switches are manually operated control devices that, together with other control switches, enable commands related to potentially hazardous conditions to be run, as long as the enabling switches are actuated continuously. These switches are used wherever personnel must work directly in the danger area on machines and systems. This is necessary, e.g. during setting up, programming, testing or servicing work. As per annex 1 of the Machinery Directive, the protective action of movable safety guards can be disabled in these operating modes. The Machinery Directive places the condition that these operating modes must be secured using a lockable device (e.g. key-operated rotary switch) and machine operation is only allowed to be triggered by a second, separate action. To enable the operator in the danger area of a machine to trigger a machine movement, an enabling device should also be actuated.

The operator must also be able to stop the machine movement using the enabling device. This task is performed by the enabling switch. Every person who is in the hazardous area must carry an enabling device so that suitable action can be taken in case of danger.


### Two-stage or three-stage enabling switch?

The operator can only start a machine movement if he/she actuates the enabling device and keeps it in the actuated position. The movement is stopped again when the switch is released. All pushbuttons and all 3-stage enabling switches feature this two-stage function (OFF-ON).


However, experience shows that the operator often clenches the enabling device in an emergency.

In this case a three-stage enabling switch is better and is specifically requested in many C standards. This switch has three switch positions (OFF-ON-OFF) and, if the operator clenches the switch, it is actuated beyond the enabling position (middle position) and the machine is shut down as a result.


If a 2-stage pushbutton is used, it must also be ensured that, in an emergency, the operator is in a position to activate an emergency stop device in close proximity (VDI 2853). To identify the type of enabling device in the catalog, the following symbols are used:

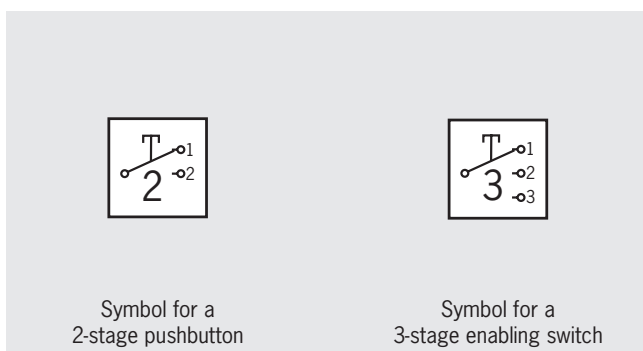

### Function sequence of two-stage pushbutton

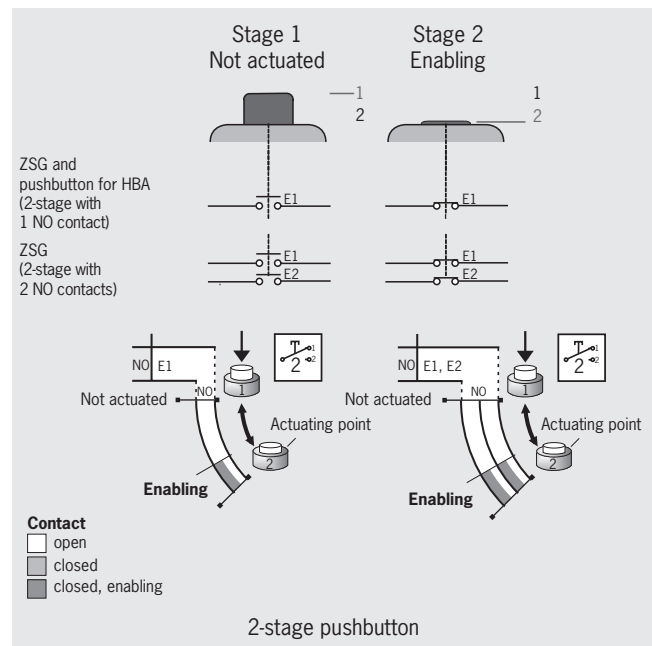

### Function sequence of three-stage enabling switch

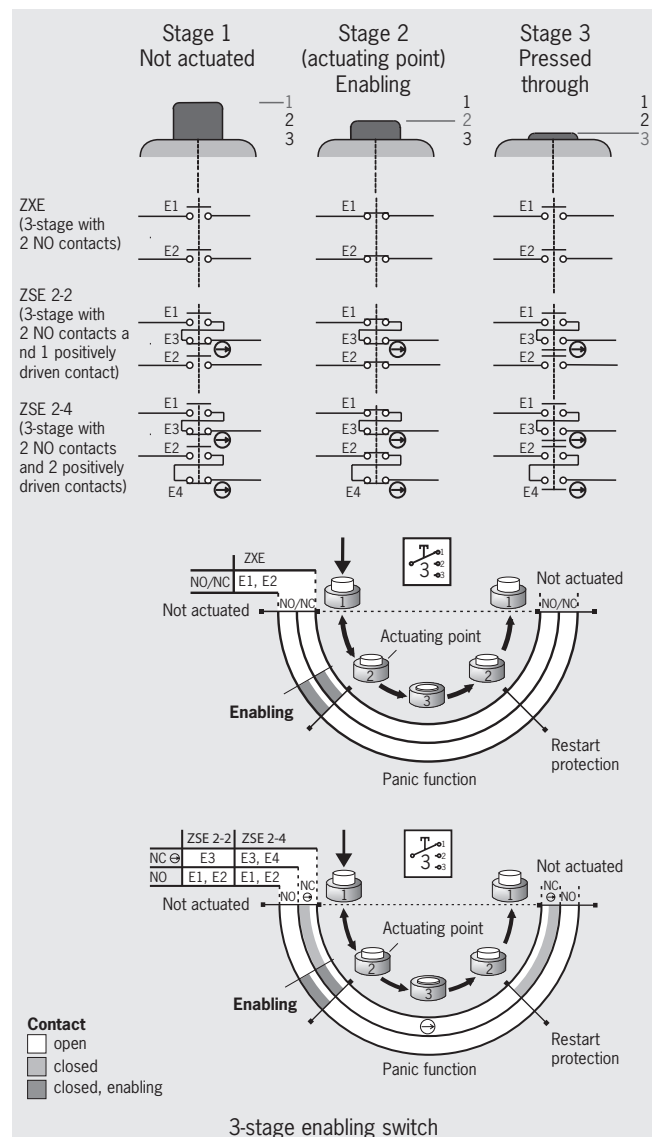

As can be clearly seen in the figure, the enabling function can only be achieved at stage 2. This function is provided by the closing of the normally open contacts (NO = E1 and E2).

If the button is released, that is back from stage 2 to stage 1, the normally open contacts are opened again. The 2-stage pushbuttons and 3-stage enabling switches are identical in this function.

If, in this example, the button on a 3-stage enabling switch is pressed past the actuating point (stage 2) in panic (to stage 3), then not only the normally open contacts (NO) are reset, but also the safe positively driven contacts (NC ⊕) in case of the ZSE series.

The patented switch system ensures that the enabling function does not become active at stage 2 on the resetting of the pushbutton from stage 3 to stage 1. In this example, the enable can only be given if normally open and normally closed contacts are closed at the same time. This situation is only possible on actuation from stage 1 to stage 2. In the other direction, from stage 3 to stage 1, stage 2 is skipped and unintentional re-starting prevented.

Once the pushbutton has reached stage 1, the function sequence can be started again.

Due to its design, the switch unit also provides a wear-free, constant actuating point (stage 2).

## Ergonomic housing

To make the operation of machines even easier and safer for the user, EUCHNER is the first manufacturer of hand-held pendant stations to have designed the housing taking into account ergonomic aspects. This means the HBA, HBM and HBL housings have been developed such that they fit optimally in the hand. Well-known manufacturers of machine tools and control systems all over the world are already using EUCHNER hand-held pendant stations. The wide product range extends from standard housings to custom-built hand-held pendant stations, e.g. with LCD displays, membrane keypads and serial communication ports.



## Custom hand-held pendant stations

Customized hand-held pendant stations based on the standard devices can also be produced in small quantities. In order to use these ergonomically designed housings for the various requirements, EUCHNER offers the option of customized solutions. In the Appendix, you will find forms which can be used to describe your requirements. We will be happy to draw up a quotation based on your requirements.

## Hand-held pendant stations from EUCHNER

Hand-held pendant stations from EUCHNER are characterized by their robust, ergonomic and attractive design. They are used to control axis movements of machines in setup mode, for example. The modular design of every unit permits an individual combination of safety components and functions as required by the customer. Depending on the size required and the functions to be integrated, EUCHNER offers three different types of hand-held pendant stations:

### ► HBA

The HBA is the smallest and handiest of the hand-held pendant stations from EUCHNER. Its compact size allows the HBA to be fastened on the machine without taking up much space. Its low weight permits comfortable working and operation, even over extended periods.

### ► HBM

The HBM is based on the ergonomic shape of the HBA. It additionally offers more space and greater flexibility for integrating more components and functions.

### ► HBL

The HBL is the largest hand-held pendant station from EUCHNER. It is especially robust and offers maximum flexibility for custom combination of components, even components with a larger depth.

## Kits for hand-held pendant stations

To enable you to use ergonomically designed housings even for small quantities, e.g. prototypes or special versions, EUCHNER provides kits for hand-held pendant stations. As a result you can assemble a hand-held pendant station in a user-friendly housing to suit your requirements.

## Explanation of symbols and notation

Symbols and specific notation related to the switches or the switching contact are used time and again in the catalog.

The following example is intended to explain these aspects:

► Notation 1 NC ⊕ + 1 NO




Explanation:

Normally closed contacts are termed NC, normally open contacts NO. The number indicates how many contacts are available. The symbol ⊕ behind the NC defines that the NC contact is a positively driven contact. This switch therefore has one normally closed contact and one normally open contact; the normally closed contact is a positively driven contact.





## Overview of hand-held pendant stations

Version	Features										Page
	Selector switch	Key-operated rotary switch	Push-button	Enabling device		Emergency stop device	Hand-wheel	Membrane keypad	RS422 interface, 3964R protocol	LCD display	
				2-st.	3-st.						
<b>Hand-held pendant stations HBA</b> 	●		●	●	●	●	●	●	●	●	10ff
<b>Hand-held pendant stations HBM</b> 	●		●		●	●	●	●			20ff
<b>Hand-held pendant stations HBL</b> 	●	●	●	●	●	●	●	●	●	●	24ff

## Hand-held pendant stations HBA



- ▶ Handwheel 100 pulses, wear-free magnetic detent mechanism
- ▶ 2 pushbuttons, 2-stage, 1 NO contact each, e.g. for enabling function


### Depending on version:

- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ 2 selector switches, 5 positions each (X, Y, Z, 4, 5 and 0, 1, 10, 100, 1000)
- ▶ 3 foil pushbuttons, 1 NO contact each

### Notes

- ▶ Holder HBA for hand-held pendant stations: see accessories page 58
- ▶ Associated flange connector, 23-pin: see accessories page 51



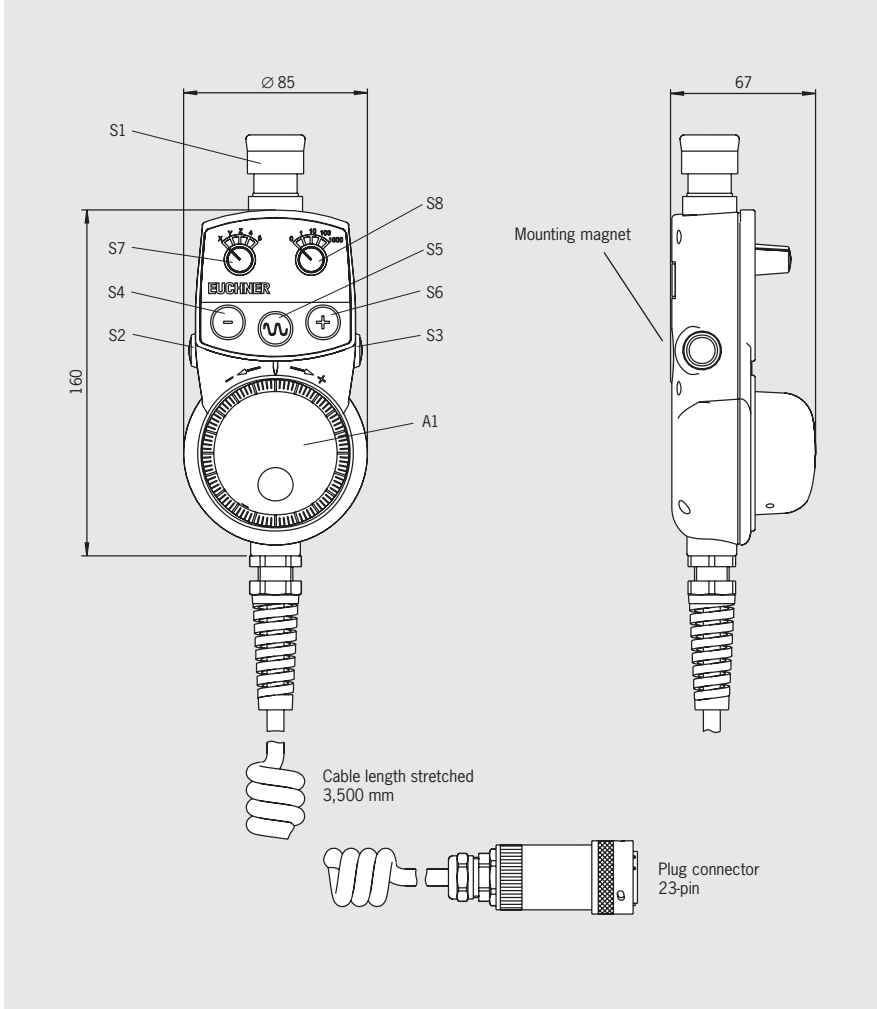

Dimension drawing




### Technical data

Parameter	Value	Unit
<b>HBA housing</b>		
Material	Plastic	
Color	Gray RAL 7040	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
Connection	Coiled cable, stretchable to 3.5 m, 23-pin plug connector	
Weight	Approx. 0.8	kg
<b>Handwheel</b>		
Pulses/revolution	100	
Power supply	5 ± 5%	V DC
Output specifications	RS422A	
<b>Pushbutton, 2-stage, e.g. for enabling function</b>		
Switching elements	2, one NO contact each	
Connection ratings	30 V DC / 100 mA	
<b>Emergency stop device</b>		
Standard	EN ISO 13850	
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 3 A	
<b>Selector switch</b>		
Output code	see circuit plan	
Switching voltage max.	25	V AC/DC
Breaking capacity max.	0.2	VA
<b>Membrane keypad</b>		
Switching elements	3, one NO contact each	
Switching voltage max.	30	V DC
Switching current max.	100	mA
Breaking capacity max.	1	W

## Ordering table

Version/item	Features					Order no.
	2 selector switches 5 positions each <b>S7, S8</b>	3 foil push- buttons, 1 NO contact each <b>S4, S5, S6</b>	2 pushbuttons 2-stage <b>S2, S3</b>	Emergency stop device <b>S1</b>	Handwheel 100 pulses <b>A1</b>	
HBA-079828 			●		●	079828
HBA-079826 	●		●	●	●	079826
HBA-072936 		●	●	●	●	072936
HBA-079827 	●	●	●	●	●	079827

## Circuit plan

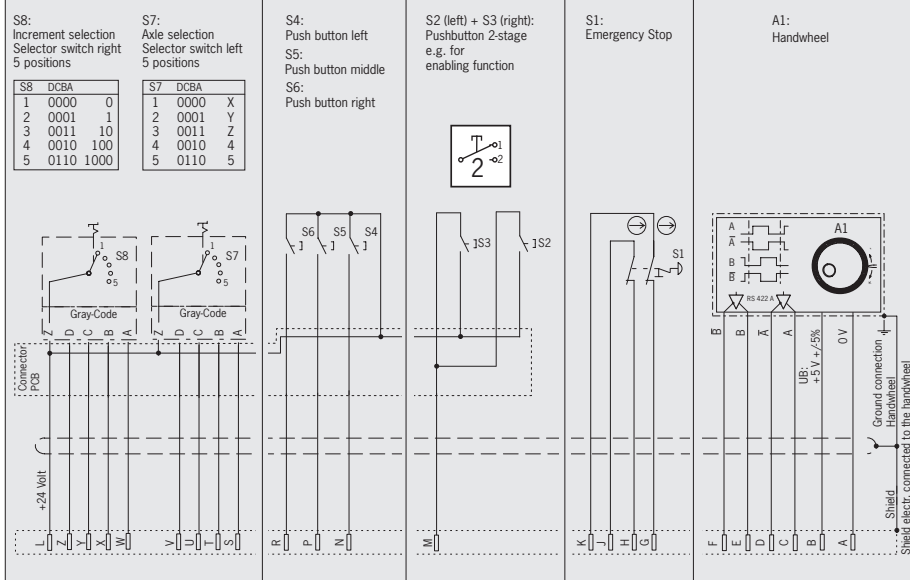

\* Travel diagram  
see page 6

## Hand-held pendant stations HBA



- ▶ Handwheel 100 pulses, wear-free magnetic detent mechanism
- ▶ 1 enabling switch, 3-stage, 2 NO contacts each


### Depending on version:

- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ 1 selector switch with 6 positions (X, Y, Z, 4, 5, 6)
- ▶ 1 selector switch with 5 positions (0, 1, 10, 100, 1000)
- ▶ 3 foil pushbuttons, 1 NO contact each

### Notes

- ▶ Holder HBA for hand-held pendant stations: see accessories page 58
- ▶ Associated flange connector, 23-pin: see accessories page 51
- ▶ Associated flange connector, 28-pin: see accessories page 51



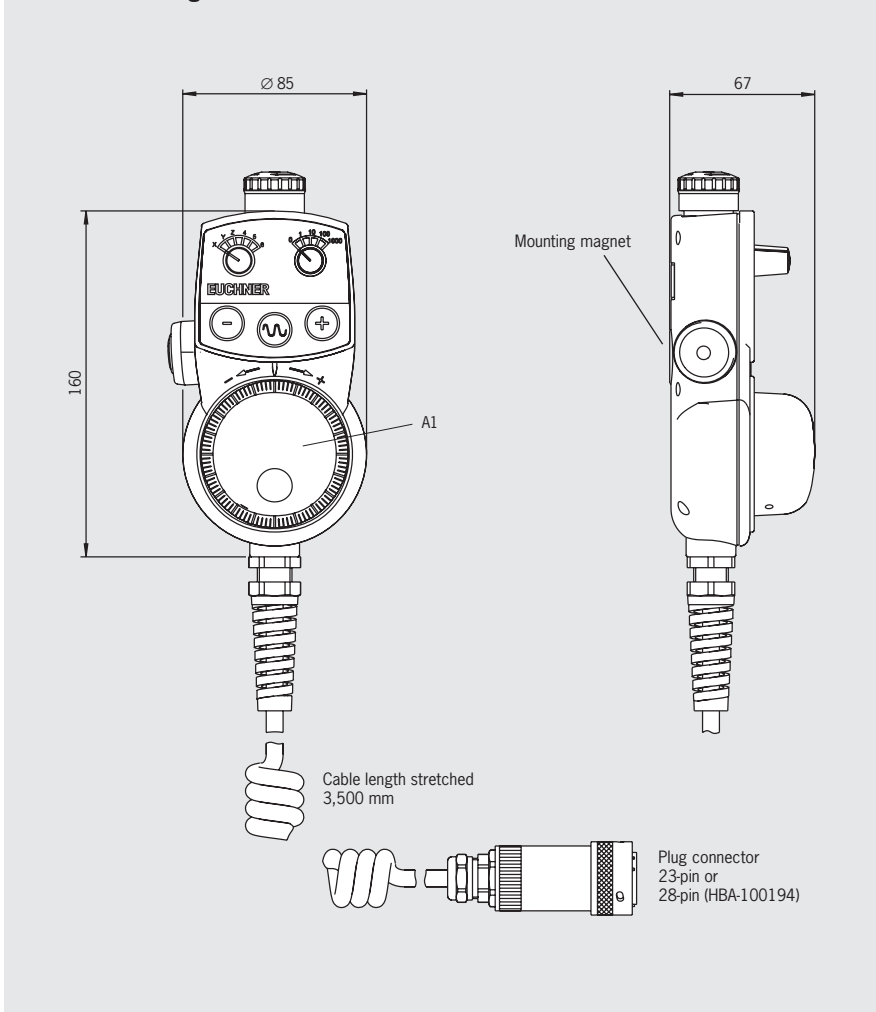

Dimension drawing




### Technical data

Parameter	Value	Unit
<b>HBA housing</b>		
Material	Plastic	
Color	Gray RAL 7040	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
Connection	Spiral cable, stretchable to 3.5 m, plug connector 23-pin or 28-pin (HBA - 100 194)	
Weight	Approx. 0.8	kg
<b>Handwheel</b>		
Pulses/revolution	100	
Power supply	5 ± 5%	V DC
Output specifications	RS422A	
<b>Enabling switch ZXE, 3-stage</b>		
Switching elements	2 NO contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 0.1 A	
<b>Emergency stop device</b>		
Standard	EN ISO 13850	
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 3 A	
<b>Selector switch</b>		
Output code	see circuit plan	
Switching voltage max.	25	V AC/DC
Breaking capacity max.	0.2	VA
<b>Membrane keypad</b>		
Switching elements	3, one NO contact each	
Switching voltage max.	30	V DC
Switching current max.	100	mA
Breaking capacity max.	1	W

## Ordering table

Version/item	Features					Order no.
	2 selector switches, 5 and 6 positions	3 foil push-buttons, 1 NO contact each	1 enabling switch ZXE, 3-stage	Emergency stop device	Handwheel 100 pulses	
HBA-100186 			●		●	100186
HBA-100212 	●		●	●	●	100212
HBA-100213 		●	●	●	●	100213
HBA-100194 	●	●	●	●	●	100194

## Circuit plan

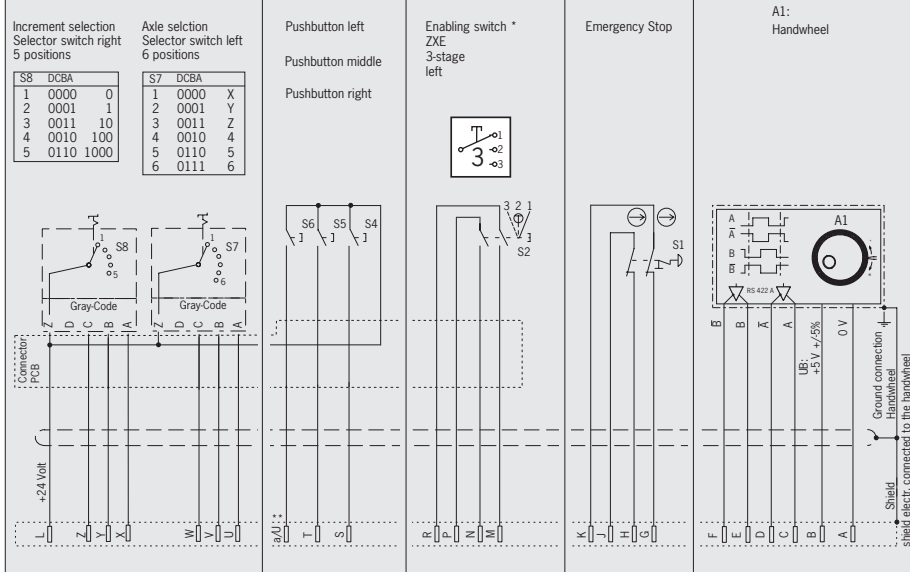

\* Travel diagram  
see page 6

\*\* Plug contact U on HBA-100213  
(plug connector, 23-pin)  
Plug contact a on HBA-100194  
(plug connector, 28-pin)

## Hand-held pendant stations HBA




- ▶ Handwheel 100 pulses, wear-free magnetic detent mechanism
- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ 1 selector switch, 6 positions (0, Z, X, Y, 4, 5)
- ▶ 6 foil pushbuttons, 1 NO contact each

### Depending on version:

- ▶ 2 pushbuttons, 2-stage, 1 NO contact each, e.g. for enabling function
- ▶ 1 enabling switch, 3-stage, 2 NO contacts

### Notes

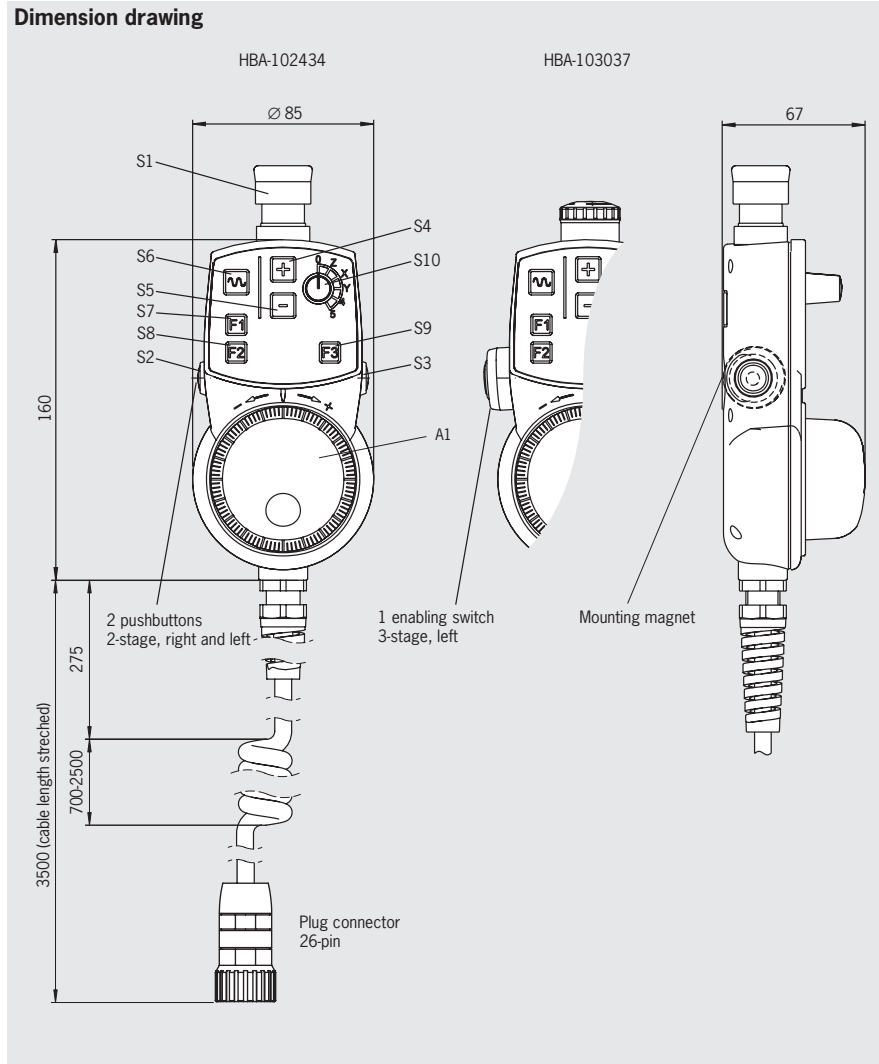

- ▶ Holder HBA for hand-held pendant stations: see accessories page 58
- ▶ Associated connection kit comprising 26-pin connection box and short-circuit plug: see accessories page 45
- ▶ Function compatible with Siemens MINI BHG




### Technical data

Parameter	Value	Unit
<b>HBA housing</b>		
Material	Plastic	
Color	Gray RAL 7040	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
Connection	Coiled cable, stretchable to 3.5 m, 26-pin plug connector	
Weight	Approx. 0.8	kg
<b>Handwheel</b>		
Pulses/revolution	100	
Power supply	5 ± 5%	V DC
Output specifications	RS422A	
<b>Emergency stop device</b>		
Standard	EN ISO 13850	
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 3 A	
<b>Selector switch</b>		
Output code	see circuit plan	
Switching voltage max.	25	V AC/ DC
Breaking capacity max.	0.2	VA
<b>Membrane keypad</b>		
Switching elements	6, one NO contact each	V AC/DC
Switching voltage max.	30	V DC
Switching current max.	100	mA
Breaking capacity max.	1	W
<b>Pushbutton, 2-stage, e.g. for enabling function</b>		
Switching elements	2, one NO contact each	mA
Connection ratings	30 V DC / 100 mA	W
<b>Enabling switch ZXE, 3-stage</b>		
Switching elements	1, 2 NO contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 0.1 A	

## Ordering table

Version/item	Features						Order no.
	1 selector switch 6 positions	6 foil pushbuttons, 1 NO contact each	2 pushbuttons, 2-stage	1 enabling switch ZXE, 3-stage	Emergency stop device	Handwheel 100 pulses	
	S10	S4, S5, S6, S7, S8, S9	S2, S3	S2	S1	A1	
HBA-102434 	●	●	●	●	●	●	102434
HBA-103037 	●	●	●	●	●	●	103037

## Circuit plan

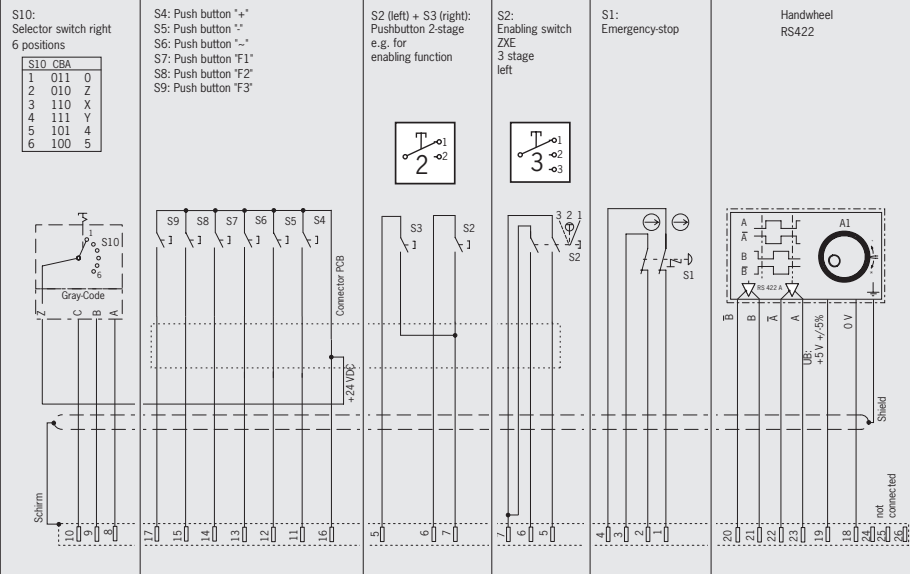

## Hand-held pendant stations HBA




- ▶ Membrane keypad can be labeled as required using slide-in strips
- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ LEDs white, color customer-specific using colored keypad membrane

### Depending on version:

- ▶ 2 pushbuttons, 2-stage, 1 NO contact each, e.g. for enabling function
- ▶ 1 enabling switch, 3-stage, 2 NO contacts
- ▶ Coiled cable, stretchable to 5 m, 35-pin plug connector
- ▶ Coiled cable, stretchable to 3.5 m, 42-core, flying lead

### Notes

- ▶ Holder HBA for hand-held pendant stations: see accessories page 58
- ▶ Associated flange connector, 35-pin: see connection components page 51
- ▶ For template for slide-in strips, see [www.euchner.de](http://www.euchner.de) (Support)

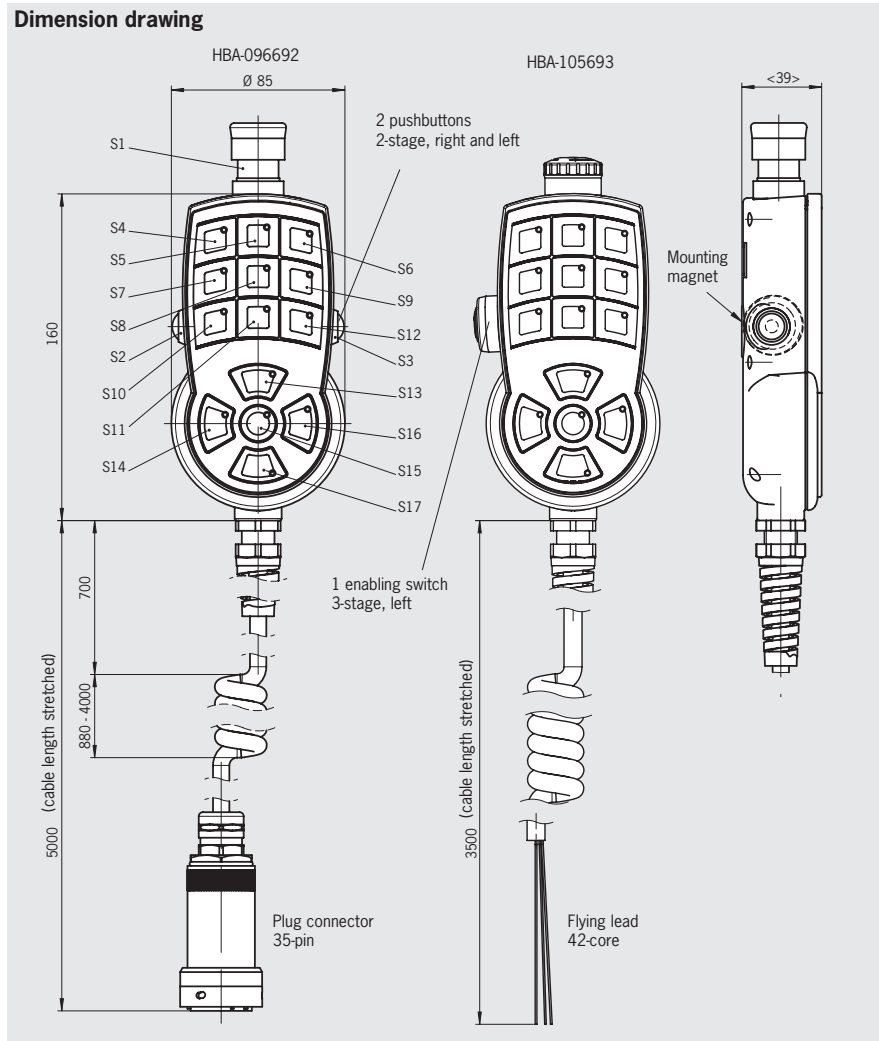

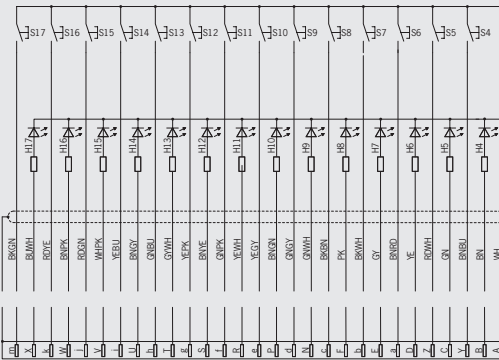





### Technical data

Parameter	Value	Unit
<b>HBA housing</b>		
Material	Plastic	
Color	Gray RAL 7040	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
Connection	Coiled cable, stretchable to 5 m, 35-pin plug connector Coiled cable, stretchable to 3.5 m, 42-core, flying lead	kg
Weight	Approx. 0.8	kg
<b>Emergency stop device</b>		
Standard	EN ISO 13850	V DC
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 3 A	
<b>Membrane keypad</b>		
Switching elements	14, one NO contact each	
Switching voltage max.	30	V DC
Switching current max.	100	mA
Breaking capacity max.	1	W
<b>Pushbutton, 2-stage, e.g. for enabling function</b>		
Switching elements	2, one NO contact each	
Switching voltage max.	30	V DC
Switching current max.	100	mA
<b>Enabling switch ZXE, 3-stage</b>		
Switching elements	1, 2 NO contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 0.1 A	

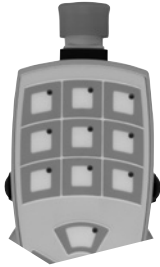

## Ordering table

Version/item	Features				Order no.
	Membrane keypad S4 - S17	Pushbutton, 2-stage S2, S3	Enabling switch ZXE, 3-stage S2	Emergency stop device S1	
HBA-096692 	●	●		●	<b>096692</b>
HBA-105693 	●		●	●	<b>105693</b>
<b>Circuit plan</b>	S4 - S17: Membrane keypad  	S2: Enabling switch* 2-stage left  S3: Enabling switch* 2-stage right  	S2: Enabling switch* ZXE 3-stage left  	S1: Emergency Stop  	

\* Travel diagram see page 6

## Hand-held pendant stations HBAS



- ▶ Programmable pulse generator
- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ Membrane keypad with 20 keys and 2 LEDs
- ▶ LCD display with LED background lighting, switchable 4-line/8-column or 8-line/16-column
- ▶ RS422 interface, 3964R protocol


### Depending on version:

- ▶ 2 pushbuttons, 2-stage, 1 NO contact each, e.g. for enabling function
- ▶ 1 enabling switch, 3-stage,
- ▶ 2 NO contacts
- ▶ Coiled cable stretchable to 3.5 m
- ▶ Straight connection cable, length 10 m

### Notes

- ▶ Holder HBA for hand-held pendant stations: see accessories page 58
- ▶ Associated male flange connector, 19-pin: see accessories page 45
- ▶ ActiveX module available for integrating the user's applications (for MS Windows®-based user programs with ActiveX support)

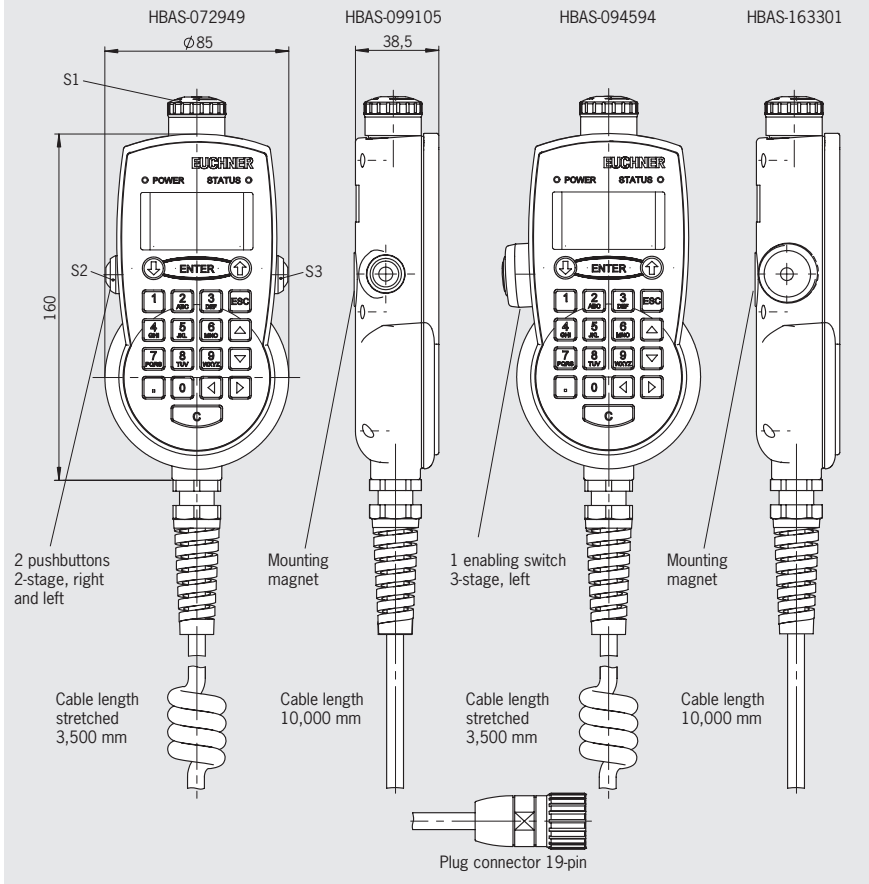

### Dimension drawing




### Technical data

Parameter	Value	Unit
<b>HBA housing</b>		
Material	Plastic	
Color	Gray RAL 7040	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
Connection	Spiral cable, stretchable to 3.5 m, or straight connection cable, length 10 m. Plug connector, 19-pin	
Weight	Approx. 0.85	kg
<b>Pulse generator</b>		
Pulses	programmable	
Output specifications	RS422A	
<b>Emergency stop device</b>		
Standard	EN ISO 13850	
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 3 A	A
<b>Communications interface</b>		
Type	Serial, RS422A (4-wire)	
Data format	8 data bits + 1 parity bit (even), 1 stop bit	
Transfer speed	9600 or 19200 baud, automatic detection	
Transfer protocol	3964R	
<b>Electrical connection</b>		
Power supply	24 ± 20%	V DC
Operating current, max.	100	mA
<b>Pushbutton, 2-stage, e.g. for enabling function</b>		
Switching elements	2, one NO contact each	
Switching voltage max.	30	V DC
Switching current max.	100	mA
<b>Enabling switch ZXE, 3-stage</b>		
Switching elements	1, 2 NO contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 0.1 A	

## Ordering table

Version/item	Features				Order no.
	2 pushbuttons, 2-stage S2, S3	1 enabling switch ZXE, 3-stage S2	Emergency stop device S1	Programmable pulse generator, membrane keypad, display, RS422 interface, 3964R protocol	
 HBAS-072949 HBAS-099105	●		●	●	072949 099105
 HBAS-094594 HBAS-163301		●	●	●	094594 163301

## Circuit plan

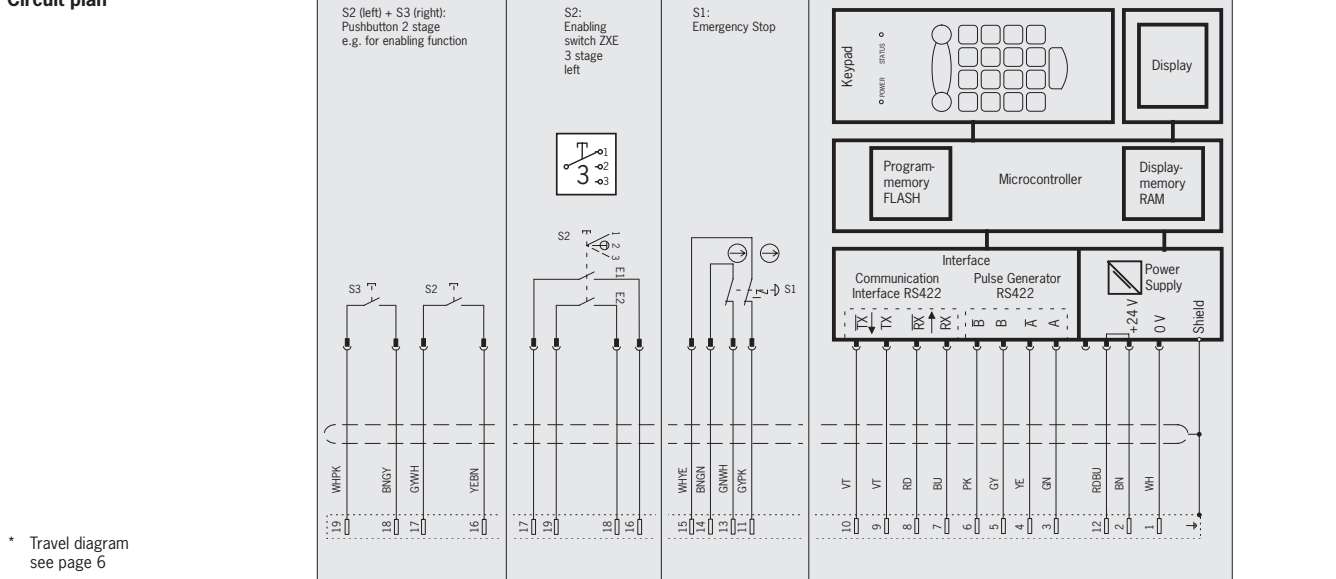

ActiveX module	093011
Software for integration into user software that supports ActiveX	
ActiveX module manual	093013
Detailed documentation on use of the software	


## Hand-held pendant station HBM-111711



- ▶ Handwheel 100 pulses, wear-free magnetic detent mechanism
- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ 1 enabling switch, 3-stage, 2 NO contacts
- ▶ 2 selector switches, 6 positions each (X, Y, Z, 4, 5, 6 and 0, 0.1, 1, 10, 100, 1000)
- ▶ 6 illuminated pushbuttons, can be individually labeled
- ▶ Coiled cable, stretchable to 3.5 m, 35-core, flying lead



Dimension drawing

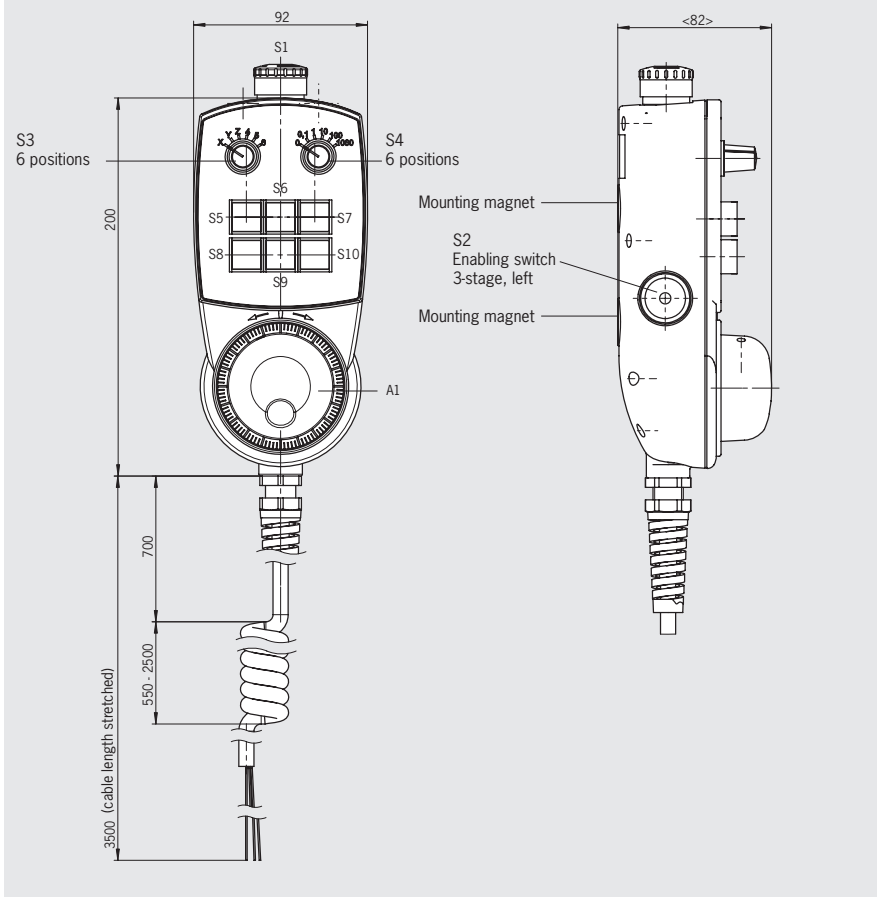

### Notes

- ▶ Holder HBM for hand-held pendant stations: see accessories page 58


### Technical data

Parameter	Value	Unit
<b>HBM housing</b>		
Material	Plastic	
Color	Anthracite	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
Connection	Coiled cable, stretchable to 3.5 m, 35-core, flying lead	
Weight	Approx. 1.1	kg
<b>Handwheel</b>		
Pulses/revolution	100	
Power supply	5 ± 5%	V DC
Output specifications	RS422A	
<b>Emergency stop device</b>		
Standard	EN ISO 13850	
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13, $U_e$ 24 V, $I_e$ 3 A	A
<b>Enabling switch ZXE, 3-stage</b>		
Switching elements	1, 2 NO contacts	
Utilization category according to IEC 60947-5-1	DC-13, $U_e$ 24 V, $I_e$ 0.1 A	
<b>Selector switch</b>		
Output code	see circuit plan	
Switching voltage max.	25	V AC/DC
Breaking capacity max.	0.2	VA
<b>Buttons</b>		
Switching elements	3, one NO contact each	
Switching voltage max.	30	V DC
Switching current max.	100	mA
LED	$I = 21 \text{ mA} / U = 24 \text{ V DC}$	

## Ordering table

Item	Order no.
Hand-held pendant station HBM-111711 with:	
▶ Handwheel 100 pulses	
▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel	
▶ Enabling switch ZXE, 3-stage, 2 NO contacts,	<b>111711</b>
▶ 2 selector switches, 6 positions each	
▶ 6 illuminated pushbuttons, 1 NO contact each	

## Circuit plan

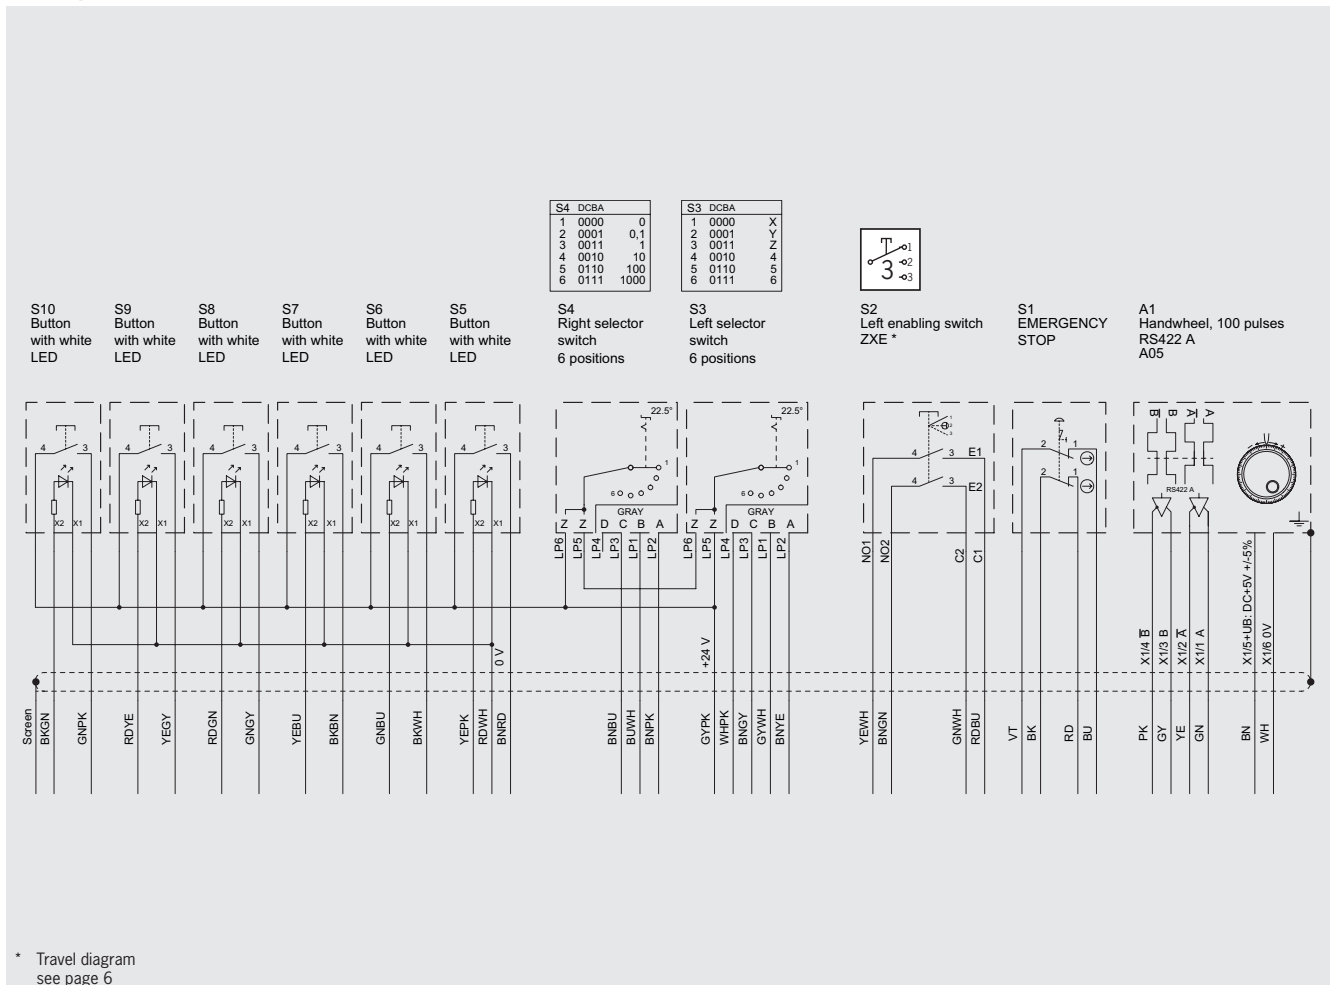


## Hand-held pendant station HBM-112392



- ▶ Handwheel 100 pulses, wear-free magnetic detent mechanism
- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ 1 enabling switch, 3-stage, 2 NO contacts
- ▶ 9 illuminated foil pushbuttons, 1 NO contact each, can be labeled as required using slide-in strips
- ▶ Straight connection cable, length 3.5 m, plug connector 35-pin



Dimension drawing

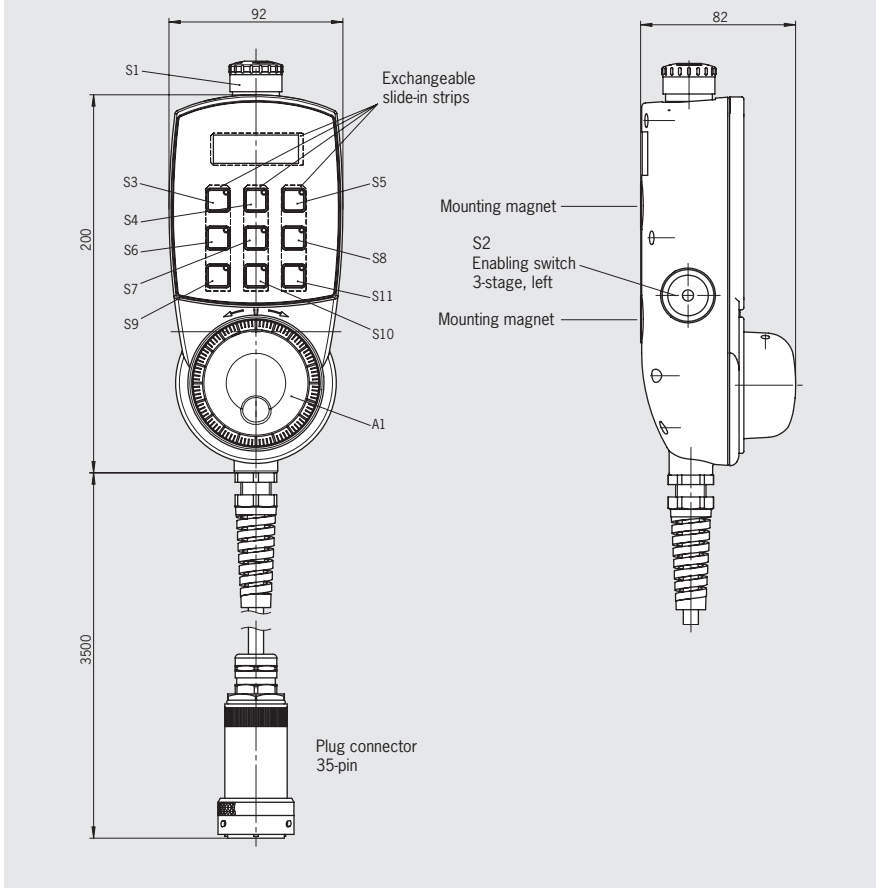

### Notes

- ▶ Holder HBM for hand-held pendant stations: see accessories page 58
- ▶ Associated flange connector, 35-pin: see connection components page 51
- ▶ For template for slide-in strips, see [www.euchner.de](http://www.euchner.de) (Support)
- ▶ Replacement for hand-held pendant stations HBE-097337 and HBE-097338


### Technical data

Parameter	Value	Unit
<b>HBM housing</b>		
Material	Plastic	
Color	Anthracite	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
Connection	Straight connection cable, length 3.5 m, plug connector 35-pin	
Weight	Approx. 1.1	kg
<b>Handwheel</b>		
Pulses/revolution	100	
Power supply	5 ± 5%	V DC
Output specifications	RS422A	
<b>Emergency stop device</b>		
Standard	EN ISO 13850	
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 3 A	A
<b>Enabling switch ZXE, 3-stage</b>		
Switching elements	1, 2 NO contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 0.1 A	
<b>Membrane keypad</b>		
Switching elements	14, one NO contact each	
Switching voltage max.	30	V DC
Switching current max.	100	mA
Breaking capacity max.	1	W

## Ordering table

Item	Order no.
Hand-held pendant station HBM-112392 with:	
▶ Handwheel 100 pulses	
▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel	
▶ Enabling switch ZXE, 3-stage, 2 NO contacts,	
▶ 9 illuminated foil pushbuttons, 1 NO contact each	
▶ Slide-in strips for logo	
	<b>112392</b>

## Circuit plan

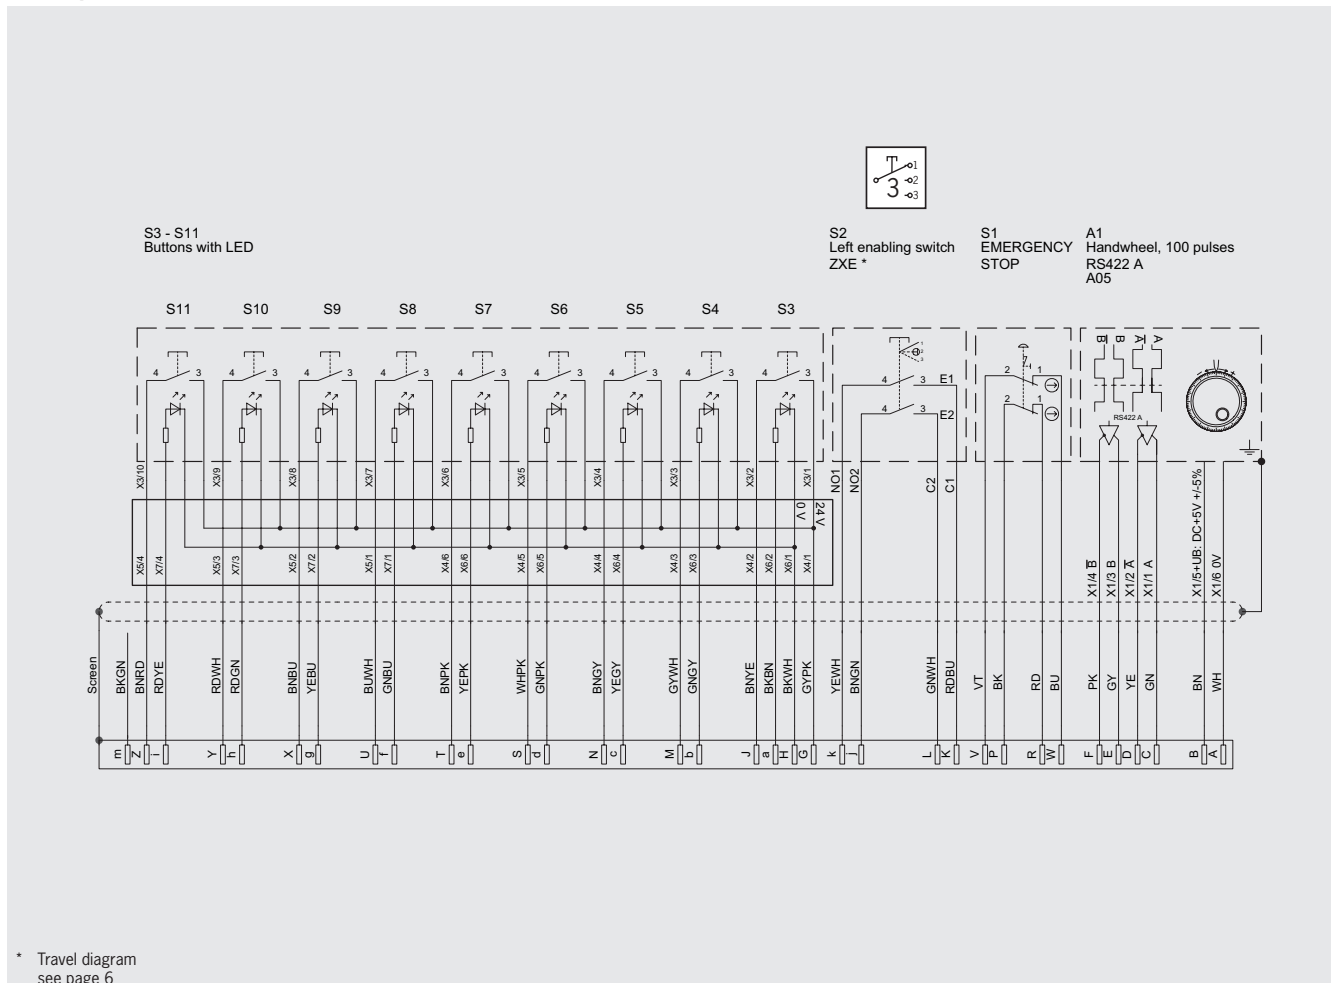


## Hand-held pendant station HBL-097339



- ▶ Handwheel 100 pulses
- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ Enabling switch, 3-stage
- ▶ 3 illuminated pushbuttons, can be individually labeled
- ▶ 2 selector switches
- ▶ Key-operated rotary switch



Dimension drawing

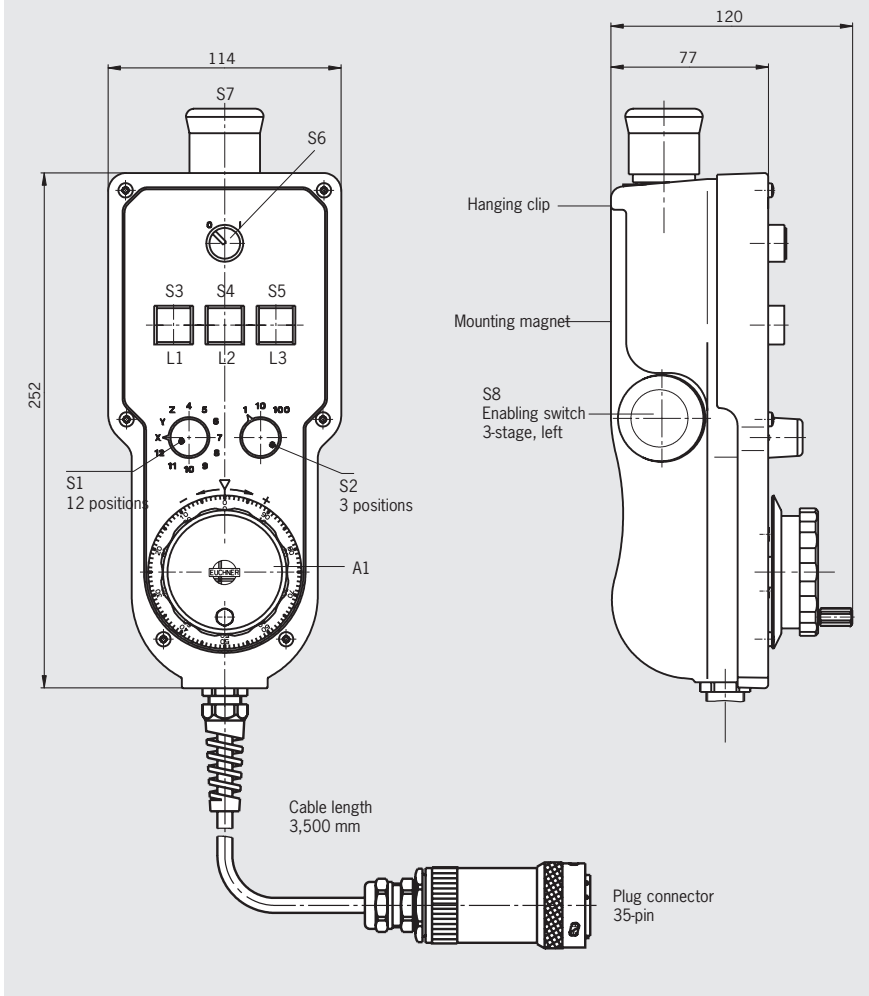

### Notes

- ▶ Holder HBL for hand-held pendant stations: see accessories page 58
- ▶ Associated flange connector, 35-pin: see connection components page 51

### Technical data


Parameter	Value	Unit
<b>Housing HBL</b>		
Material	Plastic	
Color	Blue-gray RAL 7031	
Ambient temperature	0 ... +55	°C
Degree of protection according to EN 60529	IP 65	
Connection	Cable 3.5 m, 35-pin plug	
Weight	Approx. 2.1	kg
<b>Emergency stop device</b>		
Standard	EN ISO 13850	
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 2,75 A	
<b>Handwheel HKD</b>		
Pulses per revolution	100	
Power supply	5 ± 5%	V DC
Output circuit	RS 422 A	
Output signals	see page 67	
<b>Enabling switch ZSE, 3-stage</b>		
Switching elements	2 NO contacts, 1 positively driven contact	
Utilization category according to IEC 60947-5-1	AC-15 U <sub>e</sub> 24 V I <sub>e</sub> 4 A DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 3 A	
<b>Buttons</b>		
Switching elements	3, one NO contact each	
Switching voltage max.	30	V DC
Switching current max.	100	mA
LED	I = 21 mA / U = 24 V DC	
<b>Selector switch</b>		
Switching voltage max.	30	V DC
Switching current max.	100	mA
<b>Key-operated rotary switch</b>		
Switching voltage max.	30	V AC/DC
Switching current max.	250	mA



## Ordering table

Item	Order no.
Hand-held pendant station HBL-097339 with: <ul style="list-style-type: none"> <li>▶ Handwheel 100 pulses</li> <li>▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel</li> <li>▶ Enabling switch ZSE, 3-stage, 2 NO contacts, 1 positively driven contact</li> <li>▶ 3 illuminated pushbuttons, 1 NO contact each</li> <li>▶ 2 selector switches, 12 positions and 3 positions</li> <li>▶ Key-operated rotary switch, 1 NO contact, 1 NC contact</li> </ul>	<b>097339</b>

## Circuit plan

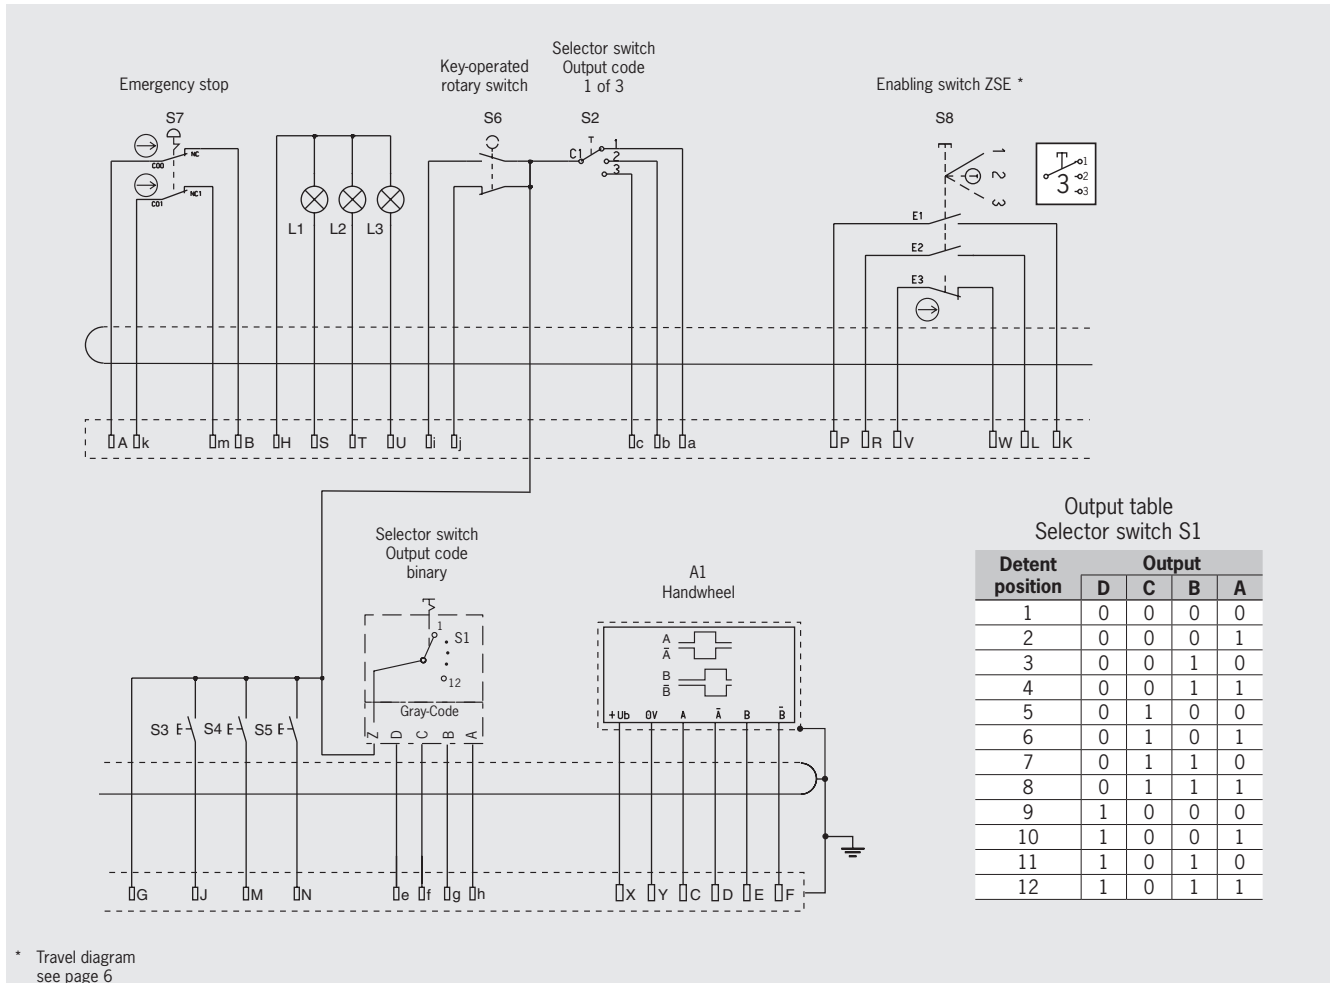


## Hand-held pendant station HBL-072725



- ▶ Handwheel 100 pulses
- ▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel
- ▶ 2 pushbuttons, 2-stage, e.g. for enabling function
- ▶ Keypad with 12 illuminated keys
- ▶ Keypad can be designed as required using slide-in film
- ▶ 2 selector switches
- ▶ LCD display (text mode)
- ▶ RS422 interface, 3964R protocol



Dimension drawing

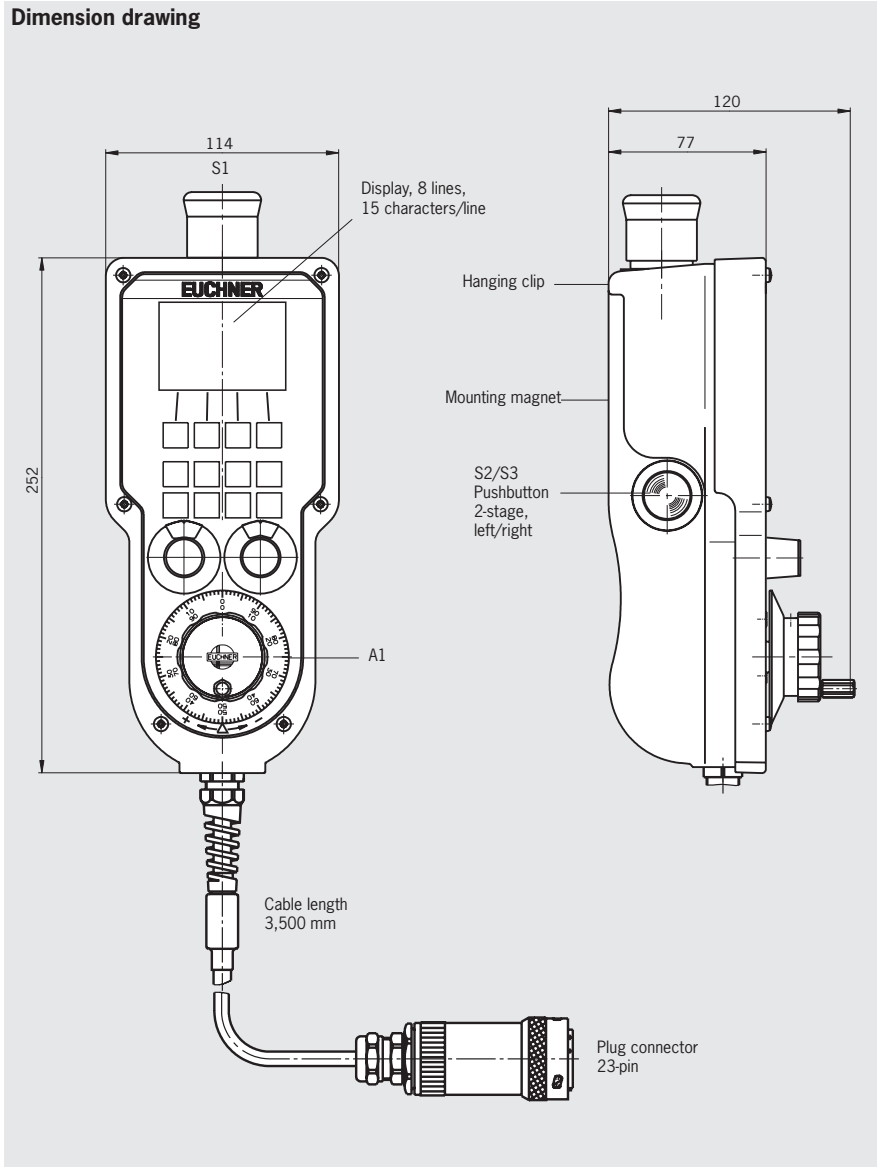

### Notes

- ▶ Holder HBL for hand-held pendant stations: see accessories page 58
- ▶ Associated flange connector, 23-pin: see connection components page 51
- ▶ ActiveX module available for integrating the user's applications (for MS Windows®-based user programs with ActiveX support)


### Technical data

Parameter	Value	Unit
<b>Housing HBL</b>		
Material	Plastic	
Color	Blue-gray RAL 7031	
Operating temperature	0 ... +50	°C
Degree of protection according to EN 60529	IP 65	
Connection	Cable 3.5 m, 23-pin plug	
Weight	2.2	kg
<b>Emergency stop device</b>		
Standard	EN ISO 13850	
Switching elements	2 NC contacts	
Utilization category according to IEC 60947-5-1	DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 2.75 A	
<b>Handwheel HKD</b>		
Pulses per revolution	100	
Output circuit	RS 422 A	
Output signals	see page 67	
<b>Pushbutton ZSG, 2-stage, e.g. for enabling function</b>		
Switching elements	2, one NO contact each	
Utilization category according to IEC 60947-5-1	AC-15 U <sub>e</sub> 24 V I <sub>e</sub> 4 A DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 3 A	
<b>Interface</b>		
Type	RS 422	
Data format	8 data bits, even parity, 1 or 2 stop bits	
Transfer speed	9600 or 19200 (setting using DIL switches)	baud
Transfer protocol	3964 R	
<b>Electrical connection</b>		
Power supply	24 ±20%	V DC
Operating current, max.	200	mA

## Ordering table

Item	Order no.
Hand-held pendant station HBLS-072725 with: <ul style="list-style-type: none"> <li>▶ Handwheel 100 pulses</li> <li>▶ Tamper-proof emergency stop device according to EN ISO 13850, dual-channel</li> <li>▶ 2 pushbuttons ZSG 2-stage, 2 NO contacts each, e.g. for enabling function</li> <li>▶ Keypad with 12 illuminated keys</li> <li>▶ 2 selector switches, 12 positions each</li> </ul>	<b>072725</b>

## Circuit plan

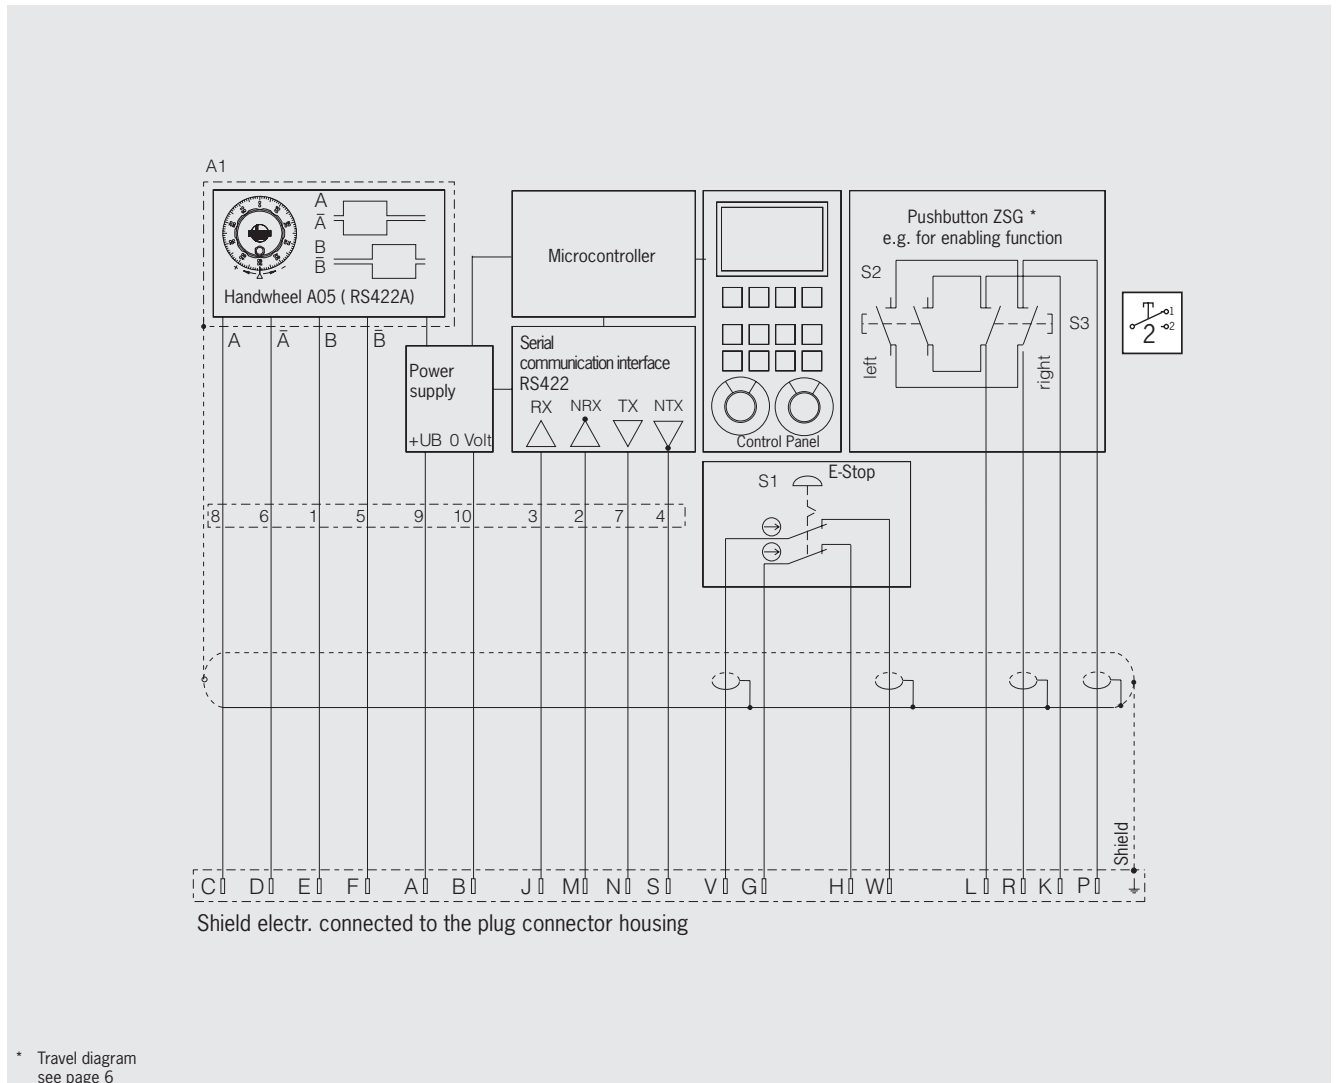

ActiveX module Software for integration into user software that supports ActiveX	<b>067176</b>
ActiveX module manual Detailed documentation on use of the software	<b>067178</b>




## Hand-held pendant station HBA kit

The kit is designed to match individual customer specifications. Thanks to its modular configuration, you can construct prototypes and special versions in line with your requirements. To match the housings, aluminum front panels are available in silver or black anodized.

Customer-specific functionality can be achieved by using the components supplied in the kit (pushbutton, selector switch, key-operated rotary switch, handwheel, enabling switch, etc). For connection to the control system, cables with different numbers of wires, plug connectors and the relevant flange sockets are available. The type of protection IP 65 can be achieved using one of the seals included.


### HBA kit without handwheel

The versions without handwheel have a cable gland and mounting magnet. In addition to the basic HBA housing, other identical versions with the option of fitting an emergency stop device and 2-stage pushbuttons or 3-stage enabling switches are available.

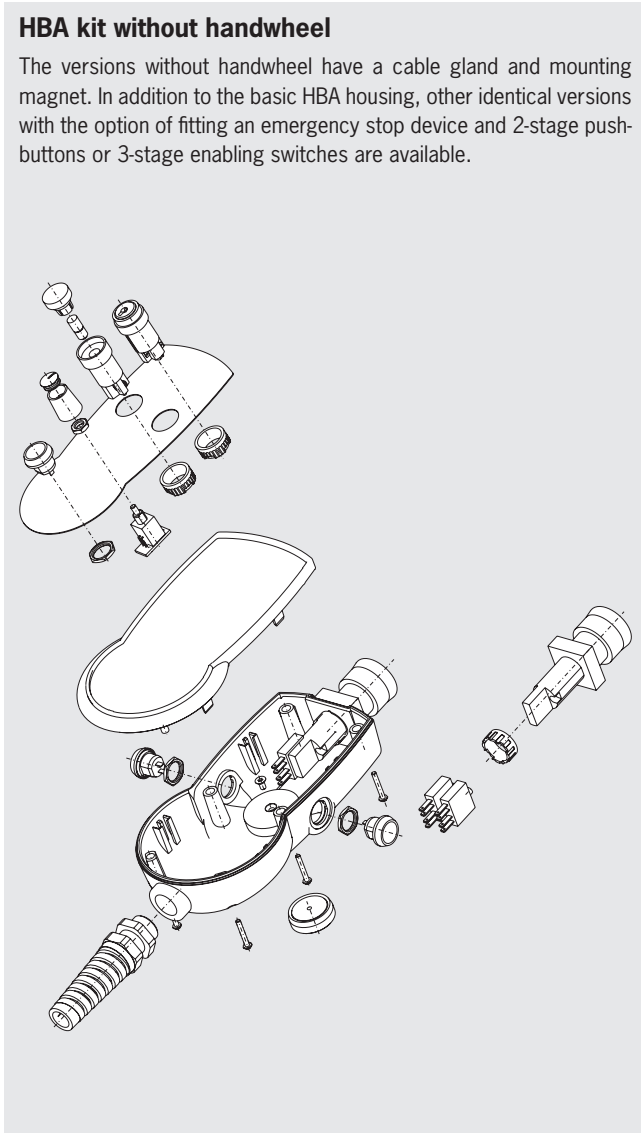

### HBA kit with handwheel

The versions with handwheels, some with 2-stage pushbutton or 3-stage enabling switch, are distinguished by the output stages of the handwheels and are adapted to various control systems.

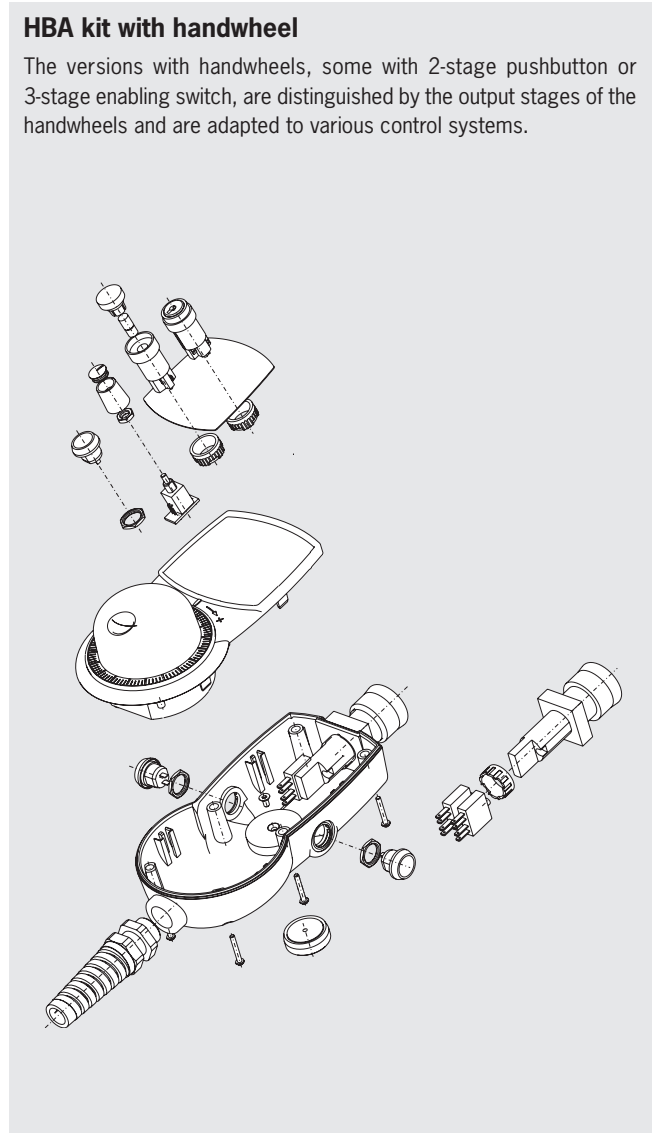

## HBA housing without handwheel

- ▶ Cable gland for cable diameter 5-10 mm
- ▶ Rubber-coated mounting magnet on the rear of housing
- ▶ 6 fixing domes for printed circuit board installation in top shell


### Depending on version:

- ▶ Hole for emergency stop device (sealed with blind plug)
- ▶ 2 pushbuttons, 2-stage, 1 NO contact each, e.g. for enabling function
- ▶ 1 enabling switch, 3-stage, 2 NO contacts

### Notes

- ▶ Suitable front panels see page 36
- ▶ Suitable emergency stop device (turn or pull to reset) see page 54
- ▶ **Attention:** Housing HBA-095562 is suitable only for emergency stop device 106435 with short design.
- ▶ Depending on version with 2 2-stage pushbuttons or 1 3-stage enabling switch.

### Dimension drawing


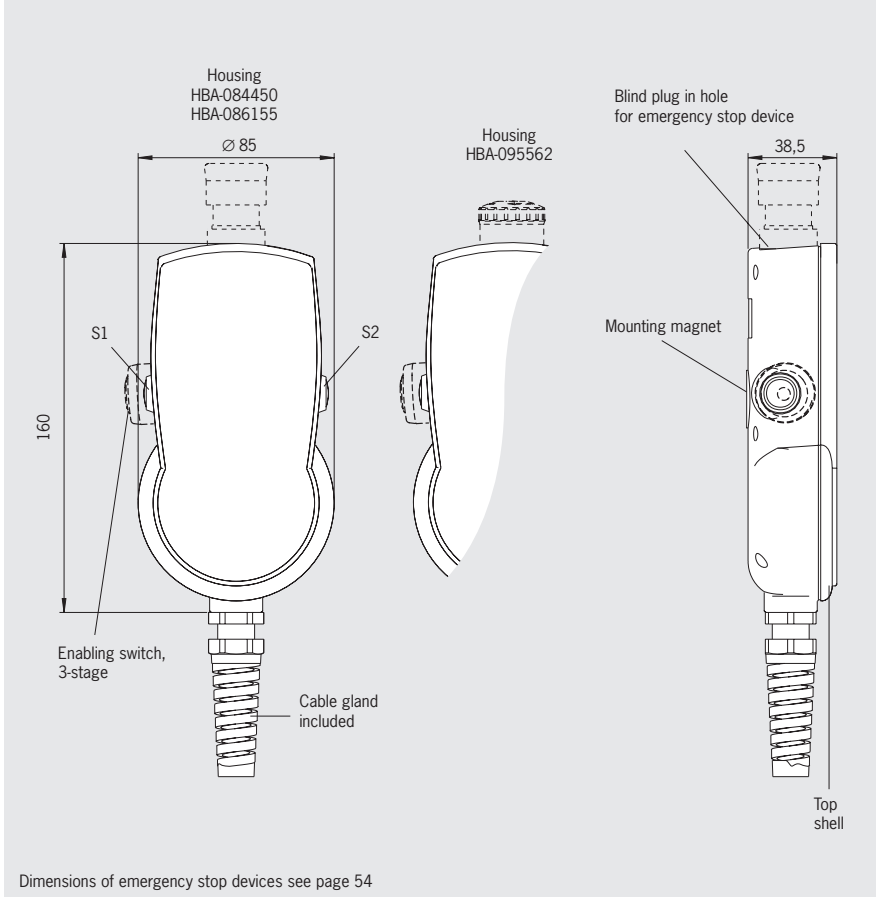


Dimensions of emergency stop devices see page 54

### Technical data

Parameter	Value	Unit
<b>HBA housing</b>		
Material	Plastic	
Color	Gray RAL 7040	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
Weight	0.3	kg
<b>Pushbutton, 2-stage, e.g. for enabling function</b>		
Switching elements	2, one NO contact each	
Connection ratings	DC 30 V / 100 mA	
<b>Enabling switch ZXE, 3-stage</b>		
Switching elements	2 NO contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 0.1 A	

## Ordering table

Version/item	Features			Order no.
	Hole for emergency stop device	2 pushbuttons * 2-stage, pre-assembled with 1 NO contact each, e.g. for enabling function S1, S2	1 enabling switch ZXE ** 3-stage, 2 NO contacts pre-assembled S1	
Housing HBA-084445 (without hole, without enabling switch)				<b>084445</b>
Housing HBA-084450	● for emergency stop short and long designs			<b>084450</b>
Housing HBA-086155	● for emergency stop short and long designs	●		<b>086155</b>
Housing HBA-095562	● for emergency stop short design		●	<b>095562</b>
				

\* Travel diagram see page 6

\*\* Travel diagram see page 55

## HBA housing with handwheel

- ▶ Handwheel 100 or 25 pulses, wear-free magnetic detent mechanism
- ▶ Hole for emergency stop device (sealed with blind plug)
- ▶ Cable gland for cable diameter 5-10 mm
- ▶ Rubber-coated mounting magnet on the rear of housing
- ▶ 6 fixing domes for printed circuit board installation in top shell


### Depending on version:

- ▶ 2 pushbuttons, 2-stage, 1 NO contact each, e.g. for enabling function
- ▶ 1 enabling switch, 3-stage, 2 NO contacts
- ▶ Various handwheel output stages

### Notes

- ▶ Suitable front panels see page 36
- ▶ Suitable emergency stop device (turn or pull to reset) see page 54
- ▶ **Attention:**
- ▶ Housings HBA-095561, HBA-095573, HBA-095572 and HBA-095574 suitable only for emergency stop device 106435 short design.
- ▶ Depending on version with 2 two-stage push-buttons or 1 three-stage enabling switch.

### Dimension drawing

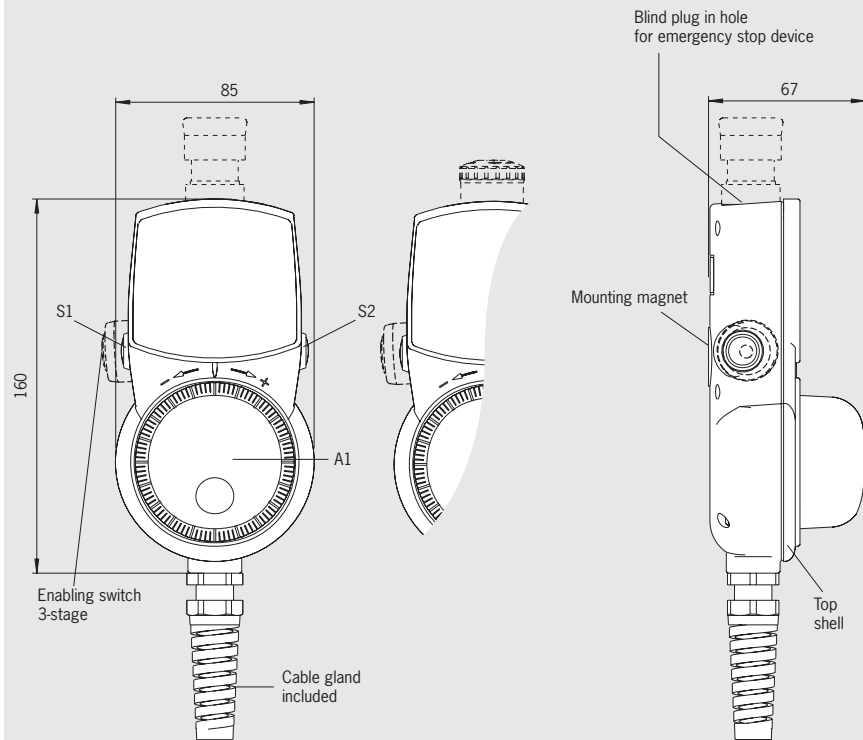

Dimensions of emergency stop devices see page 54


### Technical data

Parameter	Value	Unit
<b>HBA housing</b>		
Material	Plastic	
Color	Gray RAL 7040	
Operating temperature	0 ... +50	°C
Storage temperature	-20 ... +50	°C
Degree of protection according to EN 60529 /NEMA	IP 65 / 250-12	
Weight	0.3	kg
<b>Pushbutton, 2-stage, e.g. for enabling function</b>		
Switching elements	2, one NO contact each	
Connection ratings	30 V DC / 100 mA	
<b>Enabling switch ZXE, 3-stage</b>		
Switching elements	1, 2 NO contacts	
Utilization category according to IEC 60947-5-1	DC-13, U <sub>e</sub> 24 V, I <sub>e</sub> 0.1 A	
<b>Handwheel RS422A (U<sub>B</sub> = 5 V DC)</b>		
Pulses/revolution	100	
Power supply	5 ± 5%	V DC
Output specifications	RS422A	
<b>Handwheel push-pull 5 V (U<sub>B</sub> = 5 V DC)</b>		
Pulses/revolution	100	
Power supply	5 ± 5%	V DC
Output circuit	5 V push-pull	
Output voltage / output current	HIGH, min. 4.0 V at 0 mA / 3.4 V at 5 mA / 3.0 V at 20 mA LOW, max. 1.3 V at 15 mA	
<b>Handwheel push-pull 5 V (U<sub>B</sub> = 10...30 V DC)</b>		
Pulses/revolution	25	
Power supply	10 ... 30	V DC
Output circuit	5 V push-pull	
Output voltage / output current	HIGH, min. 4.9 V at 0 mA / 3.9 V at 5 mA / 3.6 V at 20 mA LOW, max. 1.3 V at 15 mA	
<b>Handwheel push-pull 24 V (U<sub>B</sub> = 10...30 V DC)</b>		
Pulses/revolution	100	
Power supply	10 ... 30	V DC
Output circuit	24 V push-pull	
Output voltage / output current	HIGH, min. U <sub>B</sub> - 3 V at 20 mA LOW, max. 3 V at 20 mA	



## Ordering table

Version/item	Features							Order no.
	Handwheel				Hole for emergency stop	2 pushbuttons * 2-stage, 1 NO contact each pre-assembled S1, S2	1 enabling switch ** ZXE, 3-stage, 2 NO contacts pre-assembled S1	
	Output stage		Power supply U <sub>B</sub>	Pulses per revolution				
RS422	Push-pull U <sub>A</sub>							
Housing HBA-083449	● A05		5 V DC	100	● for emergency stop short and long designs	●		<b>083449</b>
Housing HBA-095561	● A05		5 V DC	100	● for emergency stop short design		●	<b>095561</b>
Housing HBA-083499		● 5 V G12	10 ... 30 V DC	25	● for emergency stop short and long designs	●		<b>083499</b>
Housing HBA-095573		● 5 V G12	10 ... 30 V DC	25	● for emergency stop short design		●	<b>095573</b>
Housing HBA-083495		● U <sub>B</sub> - 3 V G24	10 ... 30 V DC	100	● for emergency stop short and long designs	●		<b>083495</b>
Housing HBA-095572		● U <sub>B</sub> - 3 V G24	10 ... 30 V DC	100	● for emergency stop short design		●	<b>095572</b>
Housing HBA-086762		● 5 V G05	5 V DC	100	● for emergency stop short and long designs	●		<b>086762</b>
Housing HBA-095574		● 5 V G05	5 V DC	100	● for emergency stop short design		●	<b>095574</b>

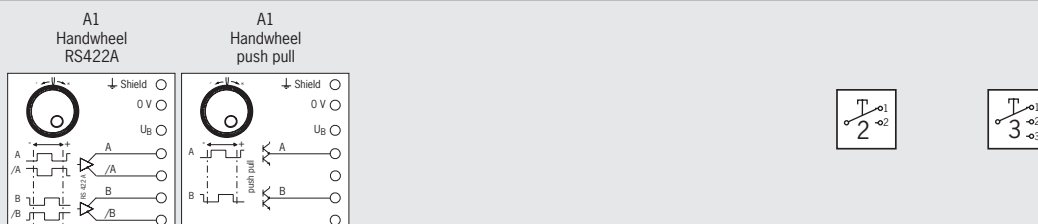

\* Travel diagram see page 6

\*\* Travel diagram see page 55

## Top shell HBA

- ▶ Material plastic
- ▶ Color gray or black


### Depending on version:

- ▶ Hole for handwheel HKB

### Notes

- ▶ Suitable front panels see page 36

### Dimension drawing

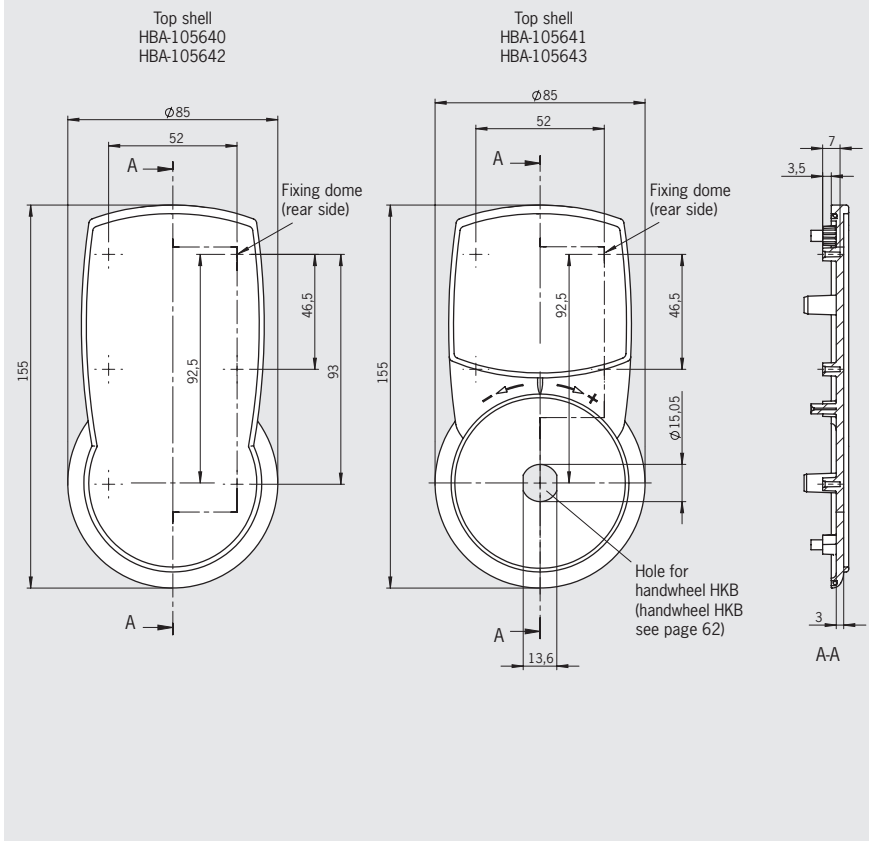

### Ordering table

Item	Order no.
Top shell HBA-105640, gray, without hole for handwheel HKB	<b>105640</b>
Top shell HBA-105641, gray, with hole for handwheel HKB	<b>105641</b>
Top shell HBA-105642, black, without hole for handwheel HKB	<b>105642</b>
Top shell HBA-105643, black, with hole for handwheel HKB	<b>105643</b>

## Bottom shell HBA


- ▶ Material plastic
- ▶ Color gray or black

### Depending on version:

- ▶ Hole for emergency stop device
- ▶ Hole for enabling switch ZXE (3-stage, 2 NO contacts)
- ▶ 2 pushbuttons, 2-stage, 1 NO contact each, e.g. for enabling function

### Notes

- ▶ Suitable emergency stop device (turn or pull to reset) see page 54
- ▶ Suitable enabling switch ZXE (3-stage, 2 NO contacts) see page 55
- ▶ Technical data of pushbutton see page 48

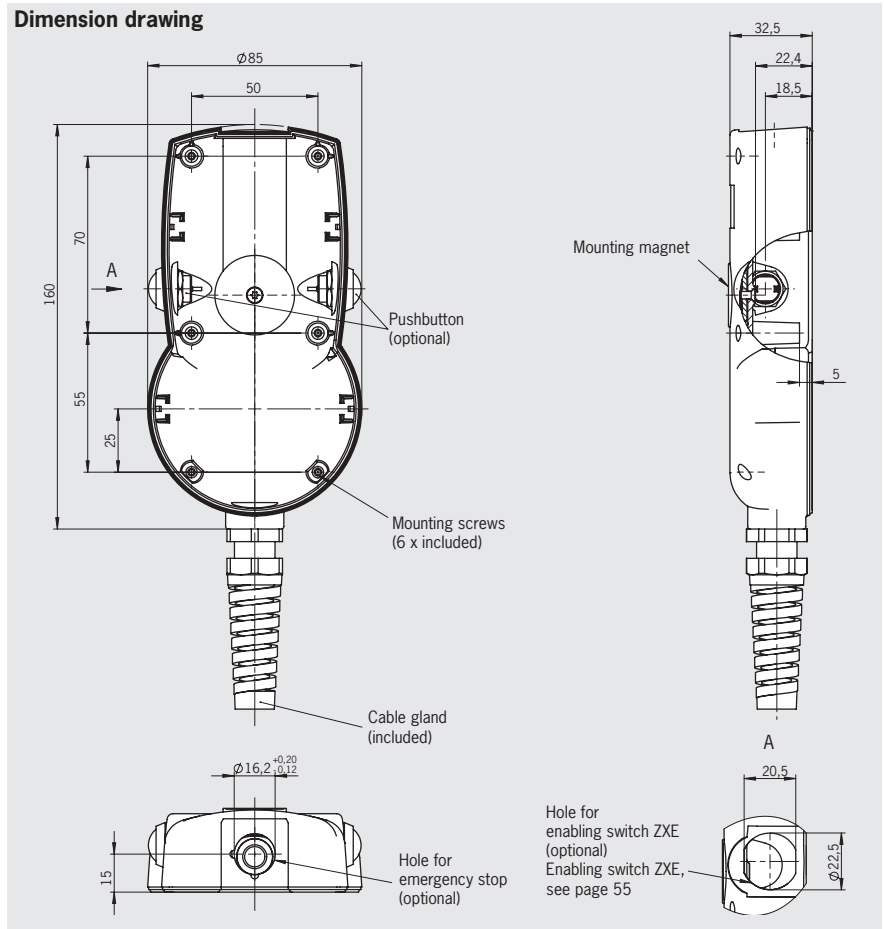

## Ordering table

Version/item	Features			Order no.
	Hole for emergency stop device	2 pushbuttons, * 2-stage, 1 NO contact each pre-assembled, e.g. for enabling function S1, S2	Hole for enabling switch ZXE ** 3-stage, 2 NO contacts S1	
Bottom shell HBA-105503, color gray (without holes, without pushbutton)				105503
Bottom shell HBA-105504, color gray	● for emergency stop short and long designs			105504
Bottom shell HBA-114213, color gray	● for emergency stop short and long designs	●		114213
Bottom shell HBA-105506, color gray	● for emergency stop short design		●	105506
Bottom shell HBA-105507, color black (without holes, without pushbutton)				105507
Bottom shell HBA-105508, color black	● for emergency stop short and long designs			105508
Bottom shell HBA-114215, color black	● for emergency stop short and long designs	●		114215
Bottom shell HBA-105510, color black	● for emergency stop short design		●	105510

\* Travel diagram see page 6

\*\* Travel diagram see page 55


## Front panels for housing and top shell HBA with and without handwheel

### Notes


- Suitable for housing HBA (see page 30 and page 32) and top shell HBA (see page 34)

### Dimension drawing

For housing HBA without handwheel

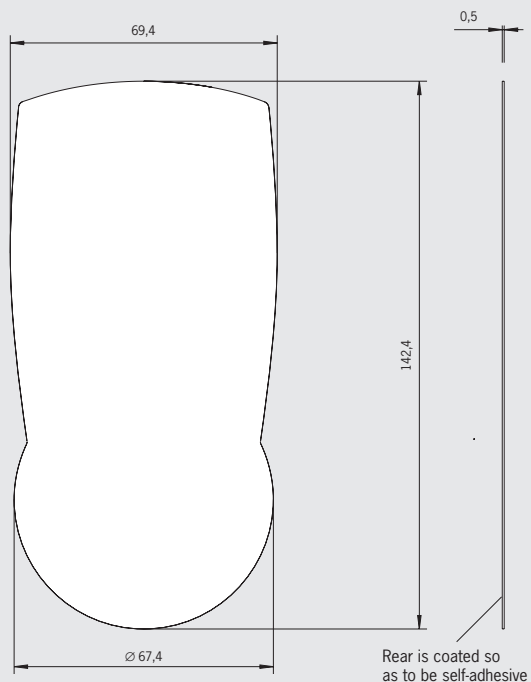

For housing HBA with handwheel

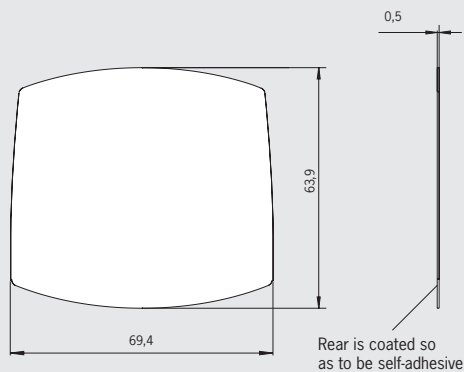

### Technical data

Parameter	Value	Unit
Front-panel material	Electrically anodized aluminum, black or silver, rear side with self-adhesive coating	

### Ordering table


Item	Order no.
Front panel for housing HBA without handwheel, silver anodized	084395
Front panel for housing HBA without handwheel, black anodized	084396
Front panel for housing HBA with handwheel, silver anodized	083635
Front panel for housing HBA with handwheel, black anodized	083636

## Hand-held pendant stations HBM kit

The kit is designed to match individual customer specifications. Thanks to its modular configuration, you can construct prototypes and special versions in line with your requirements. To match the housings, aluminum front panels are available in silver or black anodized.

Customer-specific functionality can be achieved by using the components supplied in the kit (pushbutton, selector switch, key-operated switch, handwheel, enabling switch, KE joystick, etc). For connection to the control system, cables with different numbers of wires, plug connectors and the relevant flange sockets are available. The type of protection IP 65 can be achieved using one of the seals included.

### Hand-held pendant stations HBM kit

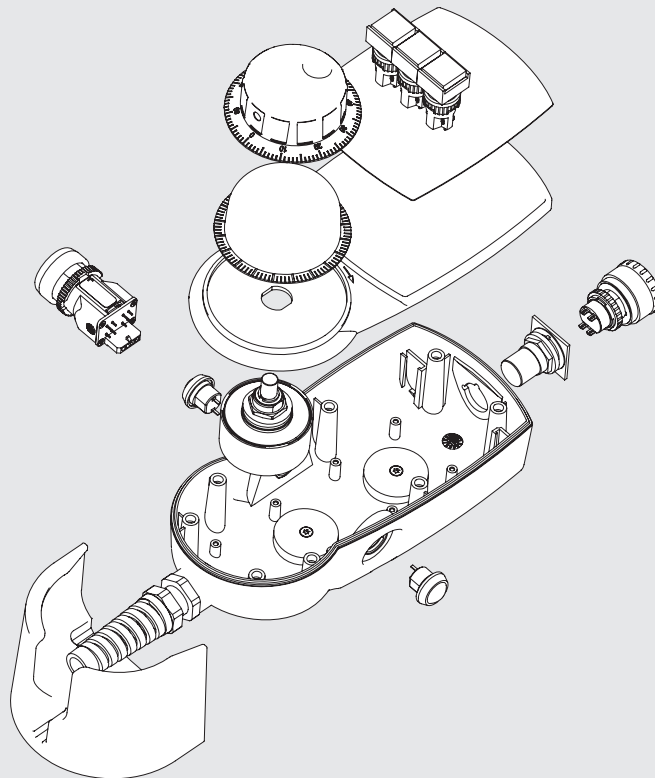

## Top shell HBM

- ▶ Material plastic
- ▶ Color anthracite


### Depending on version:

- ▶ Hole for handwheel HKB

### Notes

- ▶ Suitable front panels see page 40

### Dimension drawing

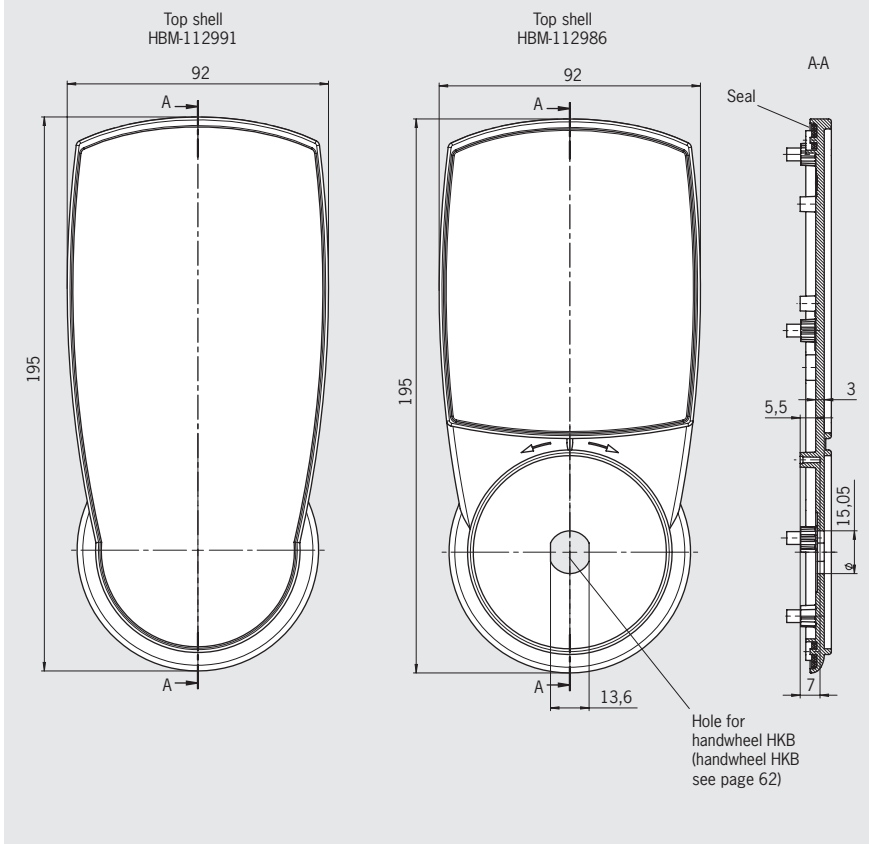

### Ordering table

Item	Order no.
Top shell HBM-112991 without hole for handwheel HKB	<b>112991</b>
Top shell HBM-112986 with hole for handwheel HKB	<b>112986</b>

## Bottom shell HBM

- ▶ Material plastic
- ▶ Color anthracite


### Depending on version:

- ▶ Hole for emergency stop device (sealed with blind plug)
- ▶ Hole for enabling switch ZXE (3-stage, 2 NO contacts)
- ▶ 2 pushbuttons, 2-stage, 1 NO contact each, e.g. for enabling function

### Notes

- ▶ Suitable emergency stop device (turn or pull to reset) see page 54
- ▶ Suitable enabling switch ZXE (3-stage, 2 NO contacts) see page 55
- ▶ Technical data of pushbutton see page 48

### Dimension drawing

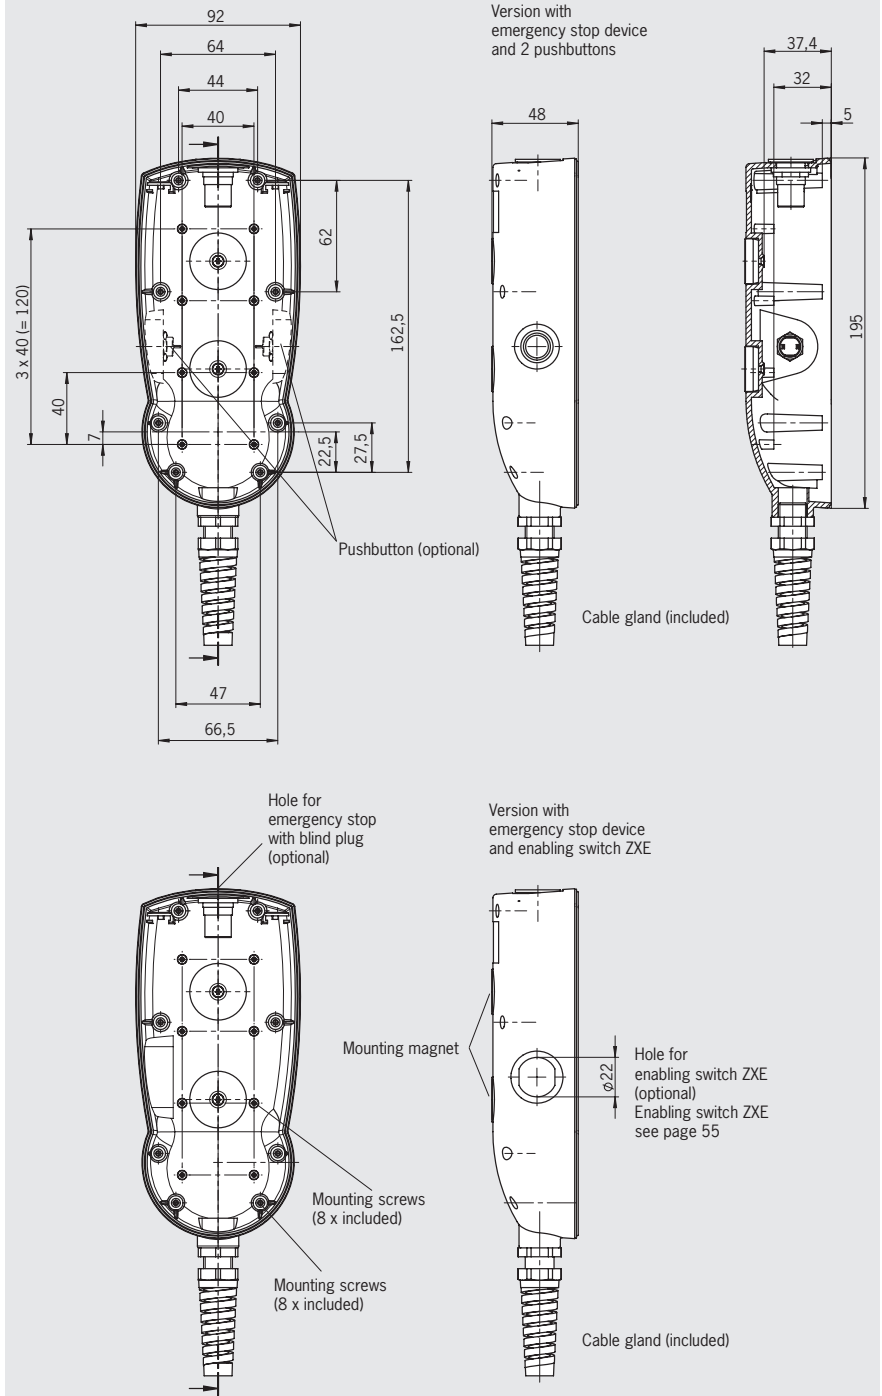

### Ordering table

Version/item	Features			Order no.
	Hole for emergency stop device	2 pushbuttons, * 2-stage, 1 NO contact each pre-assembled, e.g. for enabling function S1, S2	Hole for enabling switch ZXE ** S1	
Bottom shell HBM-112949 (without holes, without pushbutton)				112949
Bottom shell HBM-112954	●			112954
Bottom shell HBM-112958	●	●		112958
Bottom shell HBM-112955	●		●	112955

$\begin{matrix} T \\ \text{---} \\ 2 \end{matrix}$

$\begin{matrix} T \\ \text{---} \\ 3 \end{matrix}$


\* Travel diagram see page 6  
 \*\* Travel diagram see page 55

## Front panels for top shell HBM with and without handwheel

### Notes

- Suitable for top shell HBM (see page 38)

### Dimension drawing

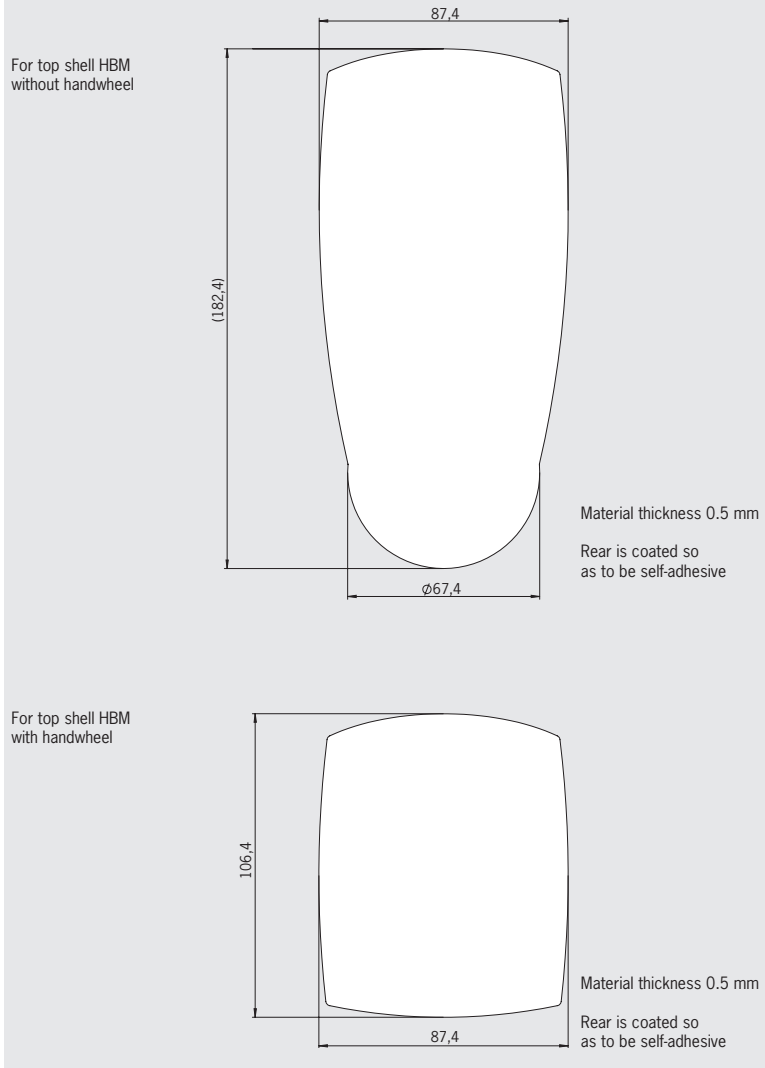

### Technical data

Parameter	Value	Unit
Front-panel material	Electrically anodized aluminum, black or silver, rear side with self-adhesive coating	

### Ordering table

Item	Order no.
Front panel for top shell HBM without handwheel, silver anodized	113060
Front panel for top shell HBM without handwheel, black anodized	113438
Front panel for top shell HBM with handwheel, silver anodized	113061
Front panel for top shell HBM with handwheel, black anodized	113440




## Hand-held pendant stations HBL kit

The kit is designed to match individual customer specifications. Thanks to its modular configuration, you can construct prototypes and special versions in line with your requirements. The HBL housings are shaped differently, depending on the safety components to be integrated. Depending on the version, front panels are available for use with or without handwheel.

Customer-specific functionality can be achieved by using the components supplied in the kit (pushbutton, selector switch, enabling switch, handwheel, key-operated rotary switch, KE joystick, etc). The type of protection IP 65 can be achieved using an included seal. For connection to the control system, cables with different numbers of wires, plug connectors and the relevant flange sockets are available.

### Hand-held pendant stations HBL kit

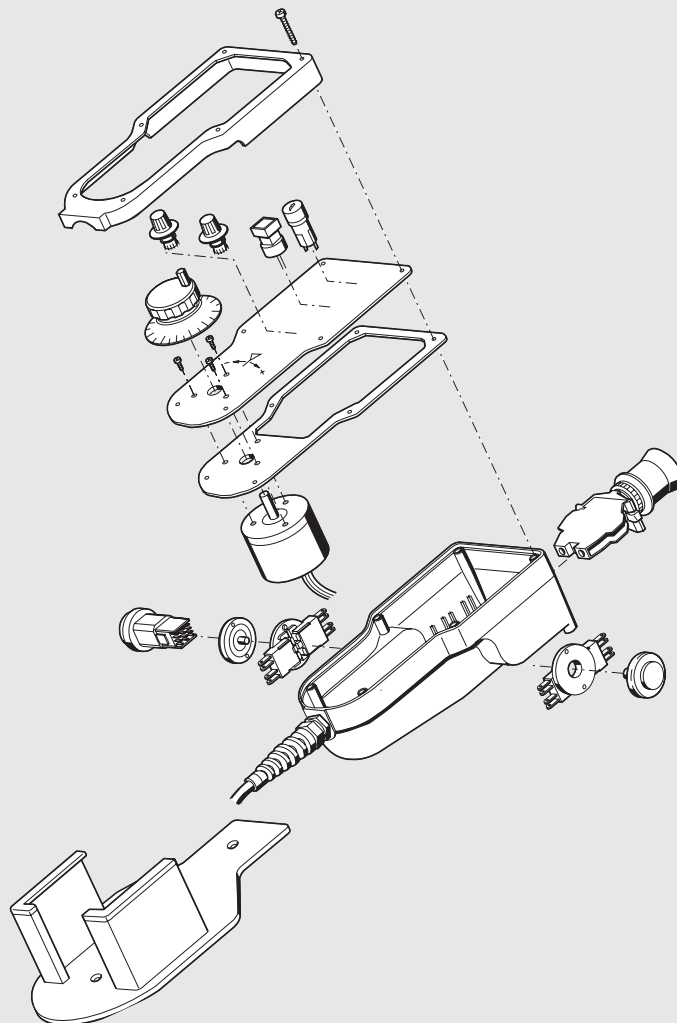

## Housing HBL

- ▶ Rubber-coated mounting magnet on the rear of housing
- ▶ Hanging clip
- ▶ 6 screws for front panel fastening
- ▶ Cover frame for front panel
- ▶ Fixing domes for printed circuit board installation


### Depending on version:

- ▶ Fastening nut for cable gland Pg 11 or Pg 13.5
- ▶ Hole for emergency stop device
- ▶ 2 pushbuttons ZSG, 2-stage, 2 NO contacts each, e.g. for enabling function
- ▶ Hole on left for enabling switch ZSE

### Notes

- ▶ Emergency stop devices see page 56
- ▶ Enabling switch ZSE see page 57
- ▶ Cable glands see page 53
- ▶ Assembly drawings see page 75
- ▶ Pg 11 for cable diameter 5 ... 10 mm
- ▶ Pg 13.5 for cable diameter 6 ... 12 mm

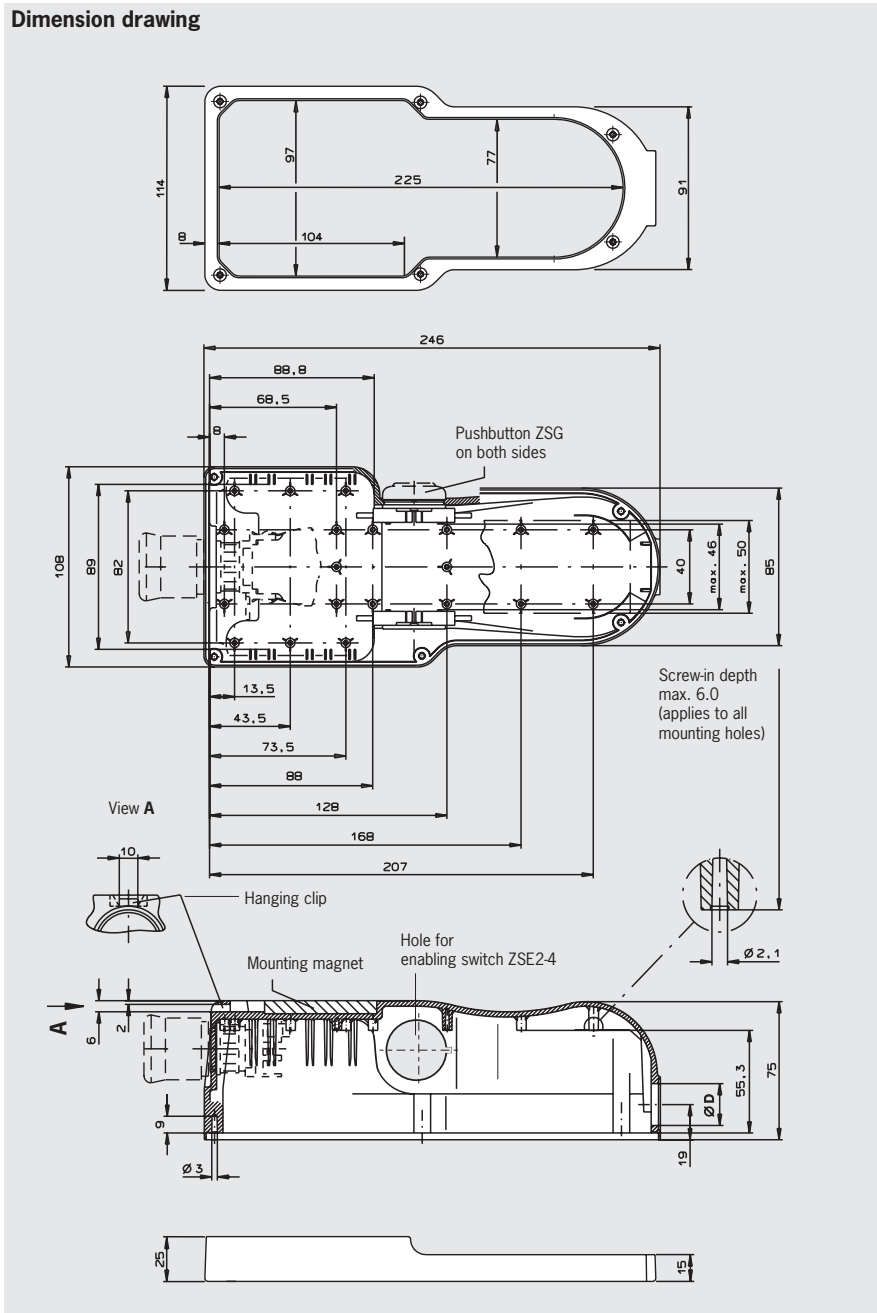

Dimension drawing



### Technical data

Parameter	Value	Unit
<b>Housing HBL</b>		
Material	Plastic	
Color	Blue-gray RAL 7031	
Ambient temperature	0 ... +55	°C
Degree of protection according to EN 60529 / NEMA	IP 65 / 250-12	
<b>Pushbutton ZSG, 2-stage, e.g. for enabling function</b>		
Switching elements	2, 2 NO contacts each	
Utilization category according to IEC 947-5-1	AC-15 U <sub>e</sub> 24 V I <sub>e</sub> 4 A DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 3 A	


## Ordering table

Version/item	Features					Order no.	
	Fixing nut for cable gland (cable gland see page 53)		Hole for emergency stop * (emergency stop see page 56)	Hole for enabling switch ZSE2-2 C1692, 3-stage 2 NO + 1 NC  (enabling switch page 57)	Hole for enabling switch ZSE2-4 C1943, 3-stage 2 NO + 2 NC  (enabling switch page 57)		2 pushbuttons ZSG, 2-stage, 2 NO contacts each pre-assembled, e.g. for enabling function
	Pg 11	Pg 13.5					
Housing HBL-073098	●					073098	
Housing HBL-072630		●				072630	
Housing HBL-073113	●		●			073113	
Housing HBL-072631		●	●			072631	
Housing HBL-073109	●			●		073109	
Housing HBL-072632		●		●		072632	
Housing HBL-072983	●		●		●	072983	
Housing HBL-083484		●	●		●	083484	

\* Blind plug  $\varnothing$  22 for emergency stop device hole included

## Front panel for housing HBL

### Dimension drawing

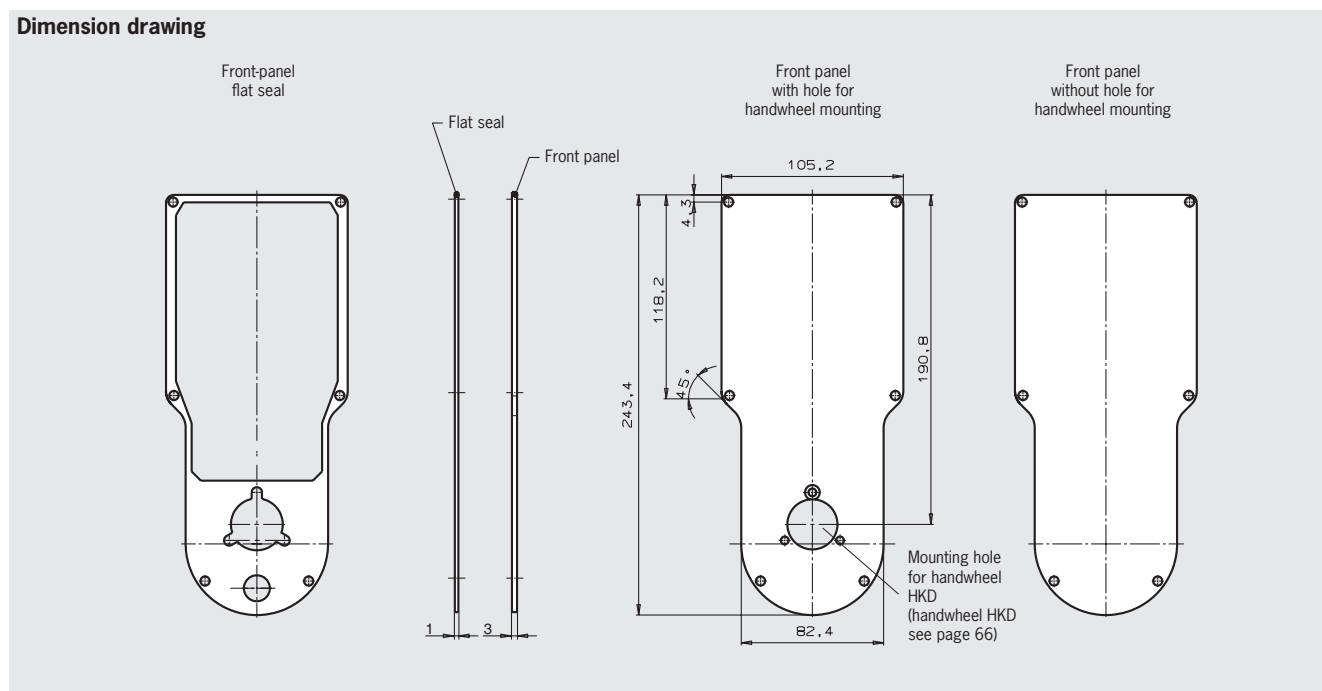

### Technical data

Parameter	Value	Unit
Front-panel material	Electrically anodized aluminum, black, NBR, self-adhesive on one side	


### Ordering table

Item	Order no.
HBL front panel, with seal	<b>073138</b>
HBL front panel, with hole for handwheel HKD and seal	<b>073139</b>
Front seal for HBL front panel	<b>072641</b>


## Connection kit

for designs HBA-102434 and HBA-103037, consisting of 26-pin flange connector and short-circuit plug

### Flange connector, 26-pin

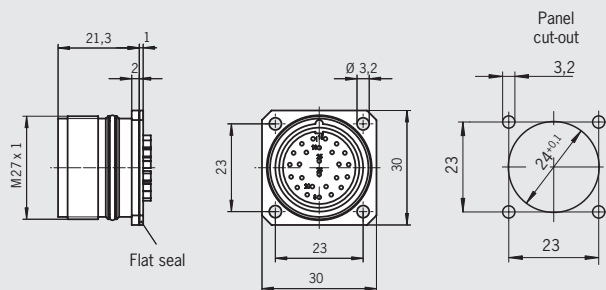

### Short-circuit plug, 26-pin for flange connector, 26-pin (bridged pin 1 with pin 4 and pin 2 with pin 3)

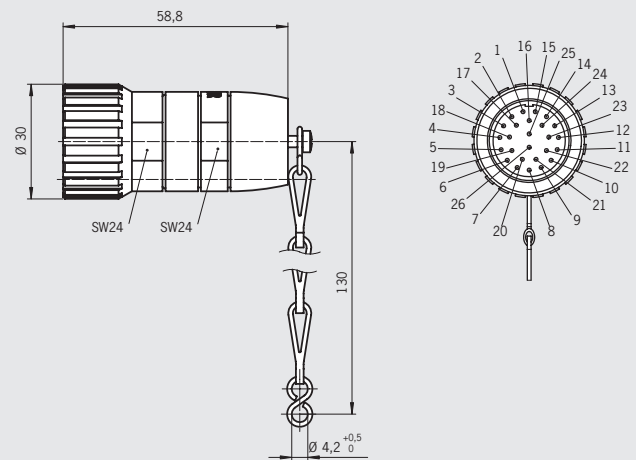

## Technical data

Parameter	Value
<b>Flange connector</b>	
Housing material	Metal
Degree of protection according to EN 60529 (inserted)	IP 67
Contact material	Copper alloy
Connection	Soldered connection
<b>Short-circuit plug</b>	
Housing material	Metal
Number of pins	26
Degree of protection according to EN 60529 (inserted)	IP 67
Contact material	Copper alloy
Connection	Crimp connection


## Ordering table

Item	Order no.
Flange connector and short-circuit plug	103042

## Male flange connector

for designs HBAS-072949 and HBAS-094594

### Male flange connector, 19-pin with socket contacts

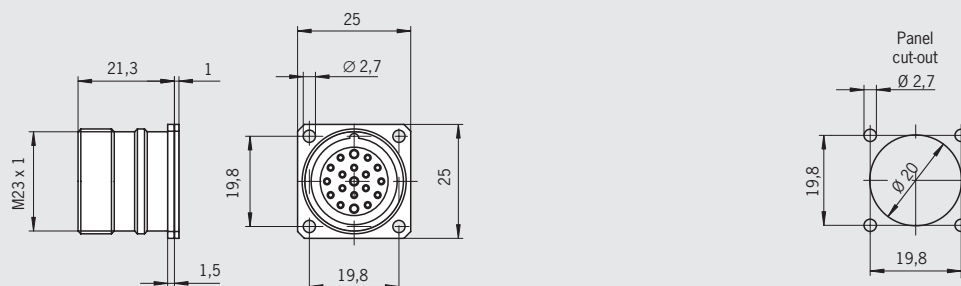

## Technical data

Parameter	Value
Housing material	Metal
Number of pins	19
Degree of protection according to EN 60529 (inserted)	IP 65
Contact material	Copper alloy
Connection	Soldered connection

## Ordering table

Item	Order no.
Male flange connector, 19-pin with socket contacts	092374




# Accessory Kit for all Designs of Hand-held Pendant Station **EUCHNER**

## Overview of accessories for hand-held pendant station kits

Accessories for kit	Accessories							Page
	EMERGENCY-STOP device	Pushbutton	Selector switch	Key-operated rotary switch	Enabling switch, 3-stage	Plug connector	Connection cables	
Suitable for all designs		●						48
			●					49/50
				●				50
						●		51
							●	52/53
Hand-held pendant stations HBA/HBM	●							54
					●			55
Hand-held pendant stations HBL	●							56
					●			57

## Pushbutton

### Dimension drawing

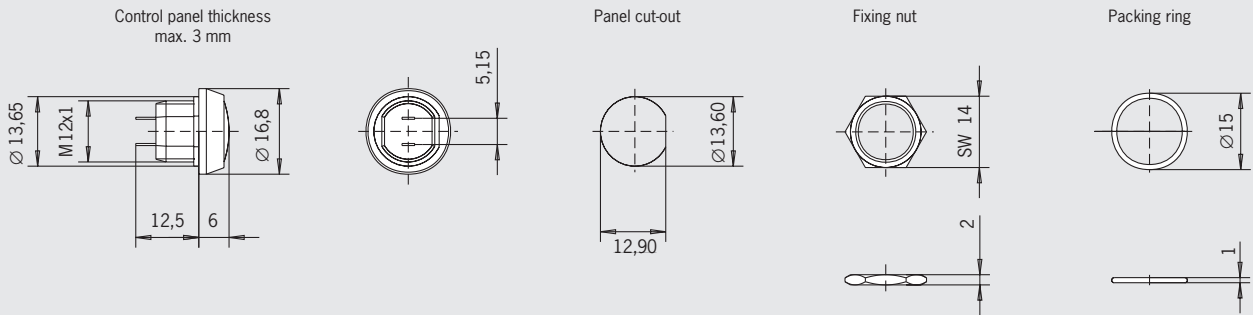

### Technical data


Parameter	Value	Unit
Ambient temperature	-25 ... +70	°C
Front degree of protection (integrated in front panel)	IP 67	
Switching principle	Button, snap-action switching element	
Switching elements	1 NO contact	
Switching voltage	30	V DC
Switching current max.	100	mA
Connection	Soldered connection	

### Ordering table

Item	Order no.
Pushbutton, black button	083640
Pushbutton, red button	086753
Pushbutton, green button	086754
Pushbutton, blue button	086757
Pushbutton, white button	086755
Pushbutton, yellow button	086756

## Illuminated pushbutton (can be individually labeled)

### Dimension drawing

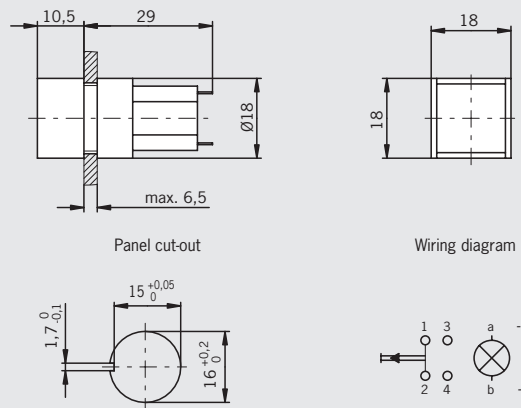

### Technical data


Parameter	Value	Unit
Ambient temperature	-25 ... +55	°C
Front degree of protection (integrated in front panel)	IP 65	
Switching principle	Button, snap-action switching element	
Switching elements	1 NO contact, 1 NC contact	
Switching current max.	100	mA
Switching voltage max.	30	V AC/DC
LED	24 V / 14 mA	
Connection	Soldered connection	

### Ordering table


Item	Order no.
Pushbutton, illuminated, can be individually labeled (yellow LED)	074991
Pushbutton, illuminated, can be individually labeled (white LED)	098045



## Gray code selector switch (ordering table see page 50)

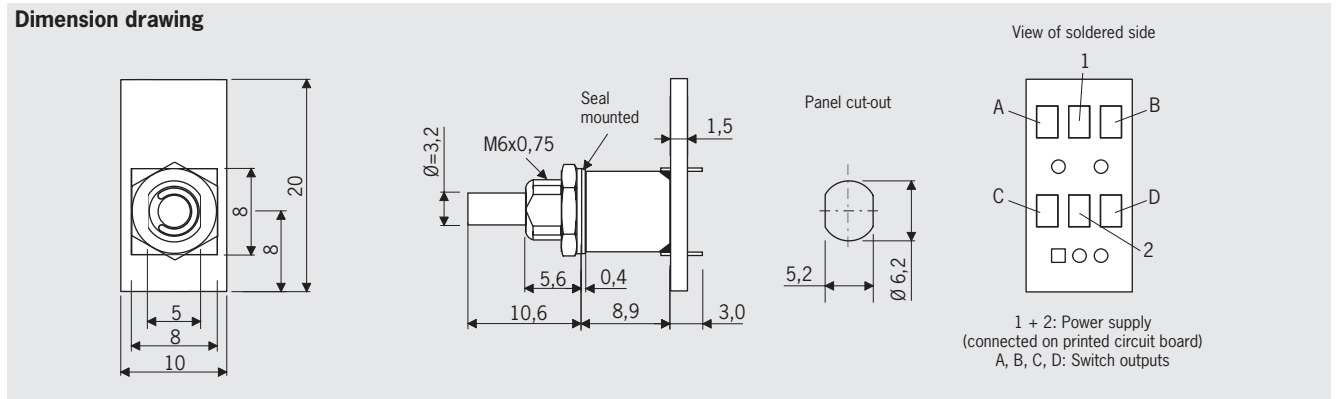


## Selector switch 1 of X (ordering table see page 50)

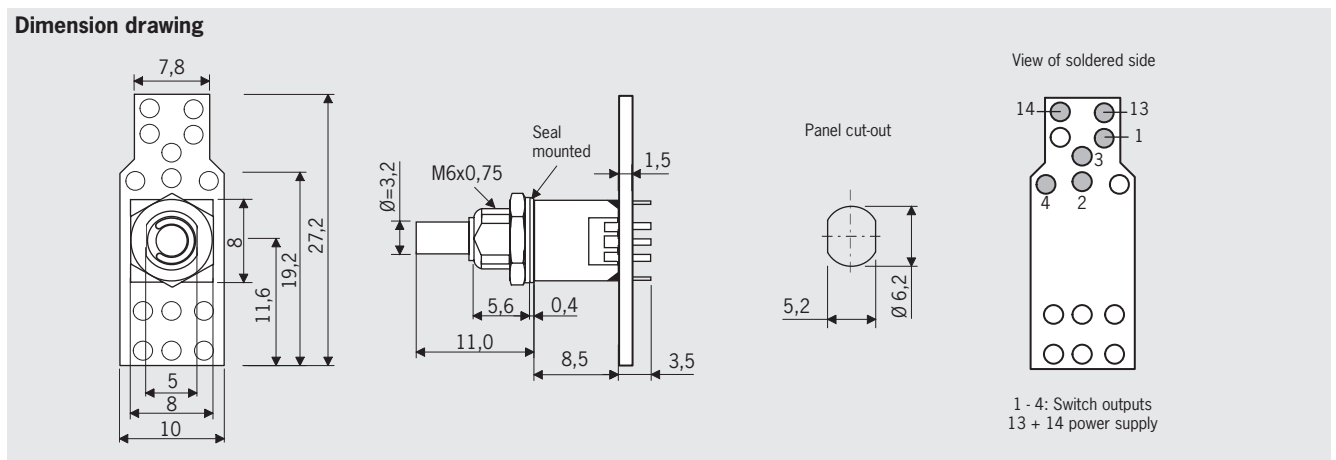

### Code table switch with Gray code

Detent position	Output			
	D	C	B	A
1	0	0	0	0
2	0	0	0	1
3	0	0	1	1
4	0	0	1	0
5	0	1	1	0
6	0	1	1	1
7	0	1	0	1
8	0	1	0	0
9	1	1	0	0
10	1	1	0	1
11	1	1	1	1
12	1	1	1	0
13	1	0	1	0
14	1	0	1	1
15	1	0	0	1
16	1	0	0	0

### Circuit diagrams switch 1 of X

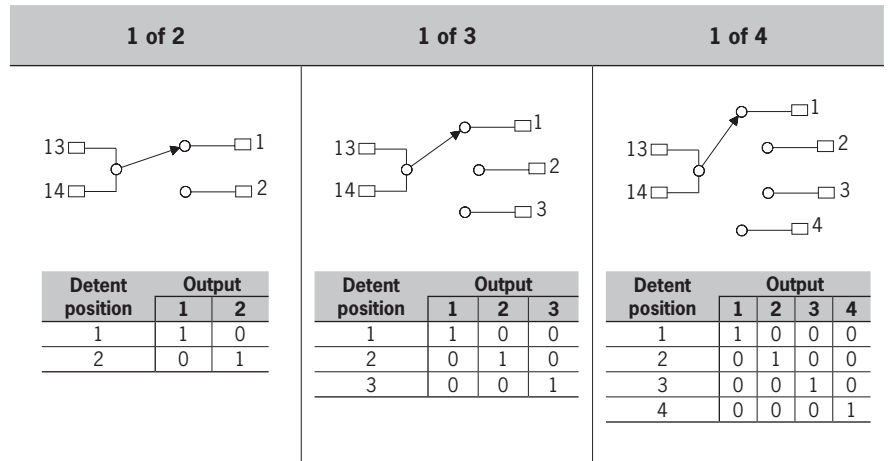


Connections A - D: Switch outputs  
Connections 1 - 3: Power supply

### Technical data

Parameter	Value	Unit
Front degree of protection (integrated in front panel)	IP 67	
Center point fixing	M6 x 0.75	
Detent positions	2, 3, 4, 5, 6, 7, 8, 12 or 16 depending on item	
Detent angle	Gray code 22.5° / 1 of X: 30°	
Output code	1 of 2, 1 of 3, 1 of 4 or Gray code depending on item	
Breaking capacity max.	0.2	VA
Switching voltage max.	25	V AC/DC
Connection	Soldered connection on printed circuit board	
Max. soldering time	≤ 5 (at t ≤ 260 °C)	s

## Rotary knob

### Dimension drawing

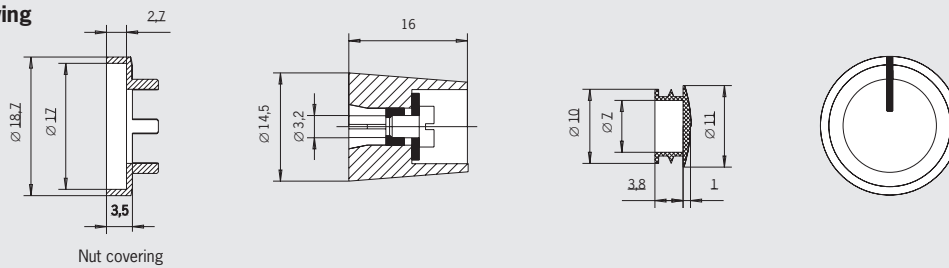

### Ordering table


Item	Detent angle	Order no.
Selector switch, 2 detent positions, 1 of 2, break-before-make <sup>1)</sup>	30°	<b>097026</b>
Selector switch, 3 detent positions, 1 of 3, break-before-make <sup>1)</sup>	30°	<b>097027</b>
Selector switch, 4 detent positions, 1 of 4, break-before-make <sup>1)</sup>	30°	<b>097028</b>
Selector switch, 5 detent positions, Gray code, short circuited <sup>2)</sup>	22.5°	<b>097029</b>
Selector switch, 6 detent positions, Gray code, short circuited <sup>2)</sup>	22.5°	<b>097030</b>
Selector switch, 7 detent positions, Gray code, short circuited <sup>2)</sup>	22.5°	<b>097031</b>
Selector switch, 8 detent positions, Gray code, short circuited <sup>2)</sup>	22.5°	<b>097032</b>
Selector switch, 12 detent positions, Gray code, short circuited <sup>2)</sup>	22.5°	<b>097033</b>
Selector switch, 16 detent positions, Gray code, short circuited <sup>2)</sup>	22.5°	<b>097034</b>
Rotary knob, matt black with a marking, collet mounting for axis 3.2 mm	–	<b>097141</b>

1) break-before-make: all outputs are open between the switch positions.

2) short circuited: the related outputs are connected between the switch positions.

## Key-operated rotary switch

### Dimension drawing

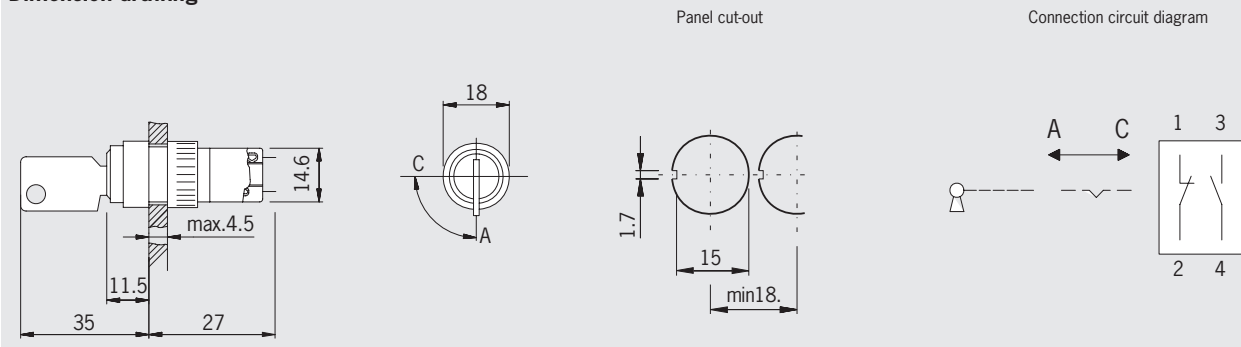

### Technical data

Parameter	Value	Unit
Ambient temperature	-25 ... +55	°C
Front degree of protection (integrated in front panel) / NEMA	IP 65 / 250-12	
Switching principle	Snap-action switching element	
Switching element	1 NO contact, 1 NC contact	
Switching voltage max.	30	V AC/DC
Switching current max.	250	mA
Connection	Soldered connection	


### Ordering table

Item	Order no.
Key-operated rotary switch	<b>083639</b>
Replacement key	<b>092386</b>


## Plug connector

Number of pins	D	L	Cable Ø
35	40.2	103	8.0 - 12.0
28	37.2	97	8.0 - 12.0
23	33.9	91	6.0 - 10.0
12	27.5	81	5.5 - 9.5

Dimension drawing

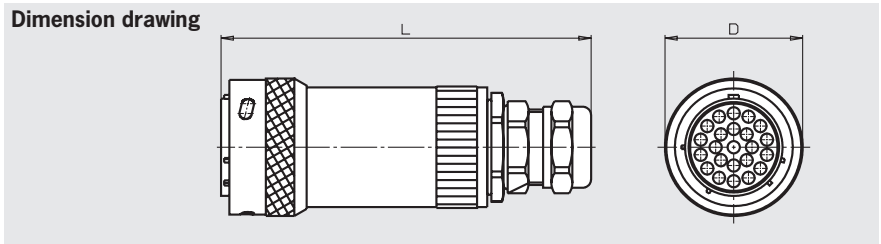

## Flange connectors

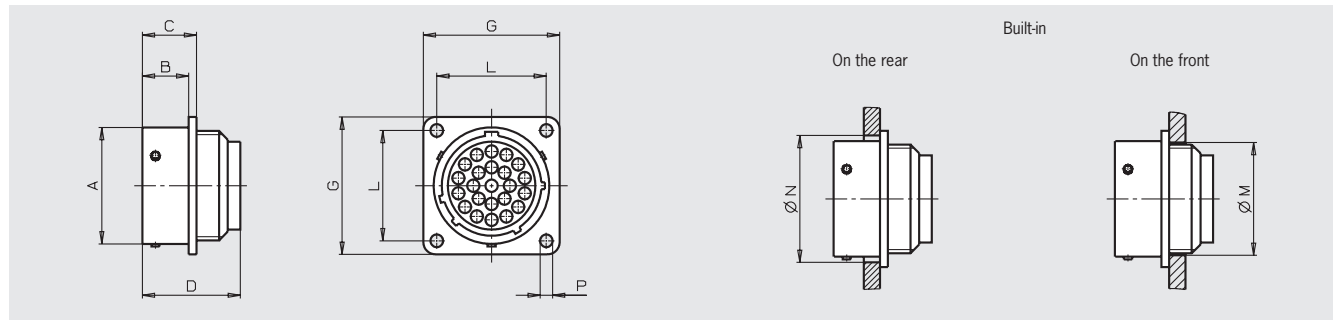


Number of pins	A	B <sub>max</sub>	C <sub>max</sub>	D <sub>max</sub>	G <sub>max</sub>	L	M	N	P
35	34.9	14.6	17.3	25.7	39.9	31.8	34.1	37.7	3.1
28	31.7	14.6	17.3	25.7	36.8	29.4	30.9	34.5	3.1
23	28.5	11.4	13.3	24.1	33.6	27	27.8	31.3	3.1
12	22.2	11.4	13.3	24.1	28.8	22.9	21.4	25	3.1

## Short-circuit plug

Number of pins	D	L	LK
35	40.2	84	255
28	37.2	78	255
23	33.9	72	252
12	27.5	59.4	251

Dimension drawing

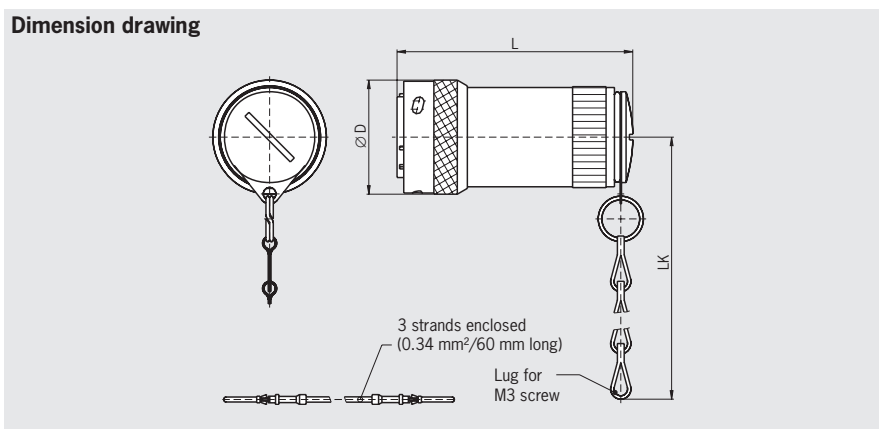

## Technical data

Parameter	Value	Unit
<b>Connecting plug/flange socket</b>		
Housing material	Metal	
Number of pins	12 / 23 / 28 / 35	
Degree of protection according to EN 60529 (inserted) / NEMA	IP 65 / 250-12	


## Ordering table

Item	Connection	Order no.
Plug connector, 35-pin with pin contacts	Crimp contacts (included) *	<b>074395</b>
Plug connector, 28-pin with pin contacts	Crimp contacts (included) *	<b>074394</b>
Plug connector, 23-pin with pin contacts	Crimp contacts (included) *	<b>074393</b>
Plug connector, 12-pin with pin contacts	Crimp contacts (included) *	<b>086748</b>
Flange socket, 35-pin with socket contacts	Crimp contacts (included) *	<b>074386</b>
Flange socket, 28-pin with socket contacts	Crimp contacts (included) *	<b>074385</b>
Flange socket, 23-pin with socket contacts	Crimp contacts (included) *	<b>074384</b>
Flange socket, 12-pin with socket contacts	Crimp contacts (included) *	<b>086749</b>
Short-circuit plug with chain, 35-pin	Crimp contacts (included) *	<b>083459</b>
Short-circuit plug with chain, 28-pin	Crimp contacts (included) *	<b>083458</b>
Short-circuit plug with chain, 23-pin	Crimp contacts (included) *	<b>083457</b>
Short-circuit plug with chain, 12-pin	Crimp contacts (included) *	<b>087802</b>


\* Suitable crimping tool Souriau S16RCM20 Crimping tool for machined contacts  
 Suitable extraction tool Souriau RX2025GE1 Extraction tool

## Cable coiled and straight

### View of cable cross-section

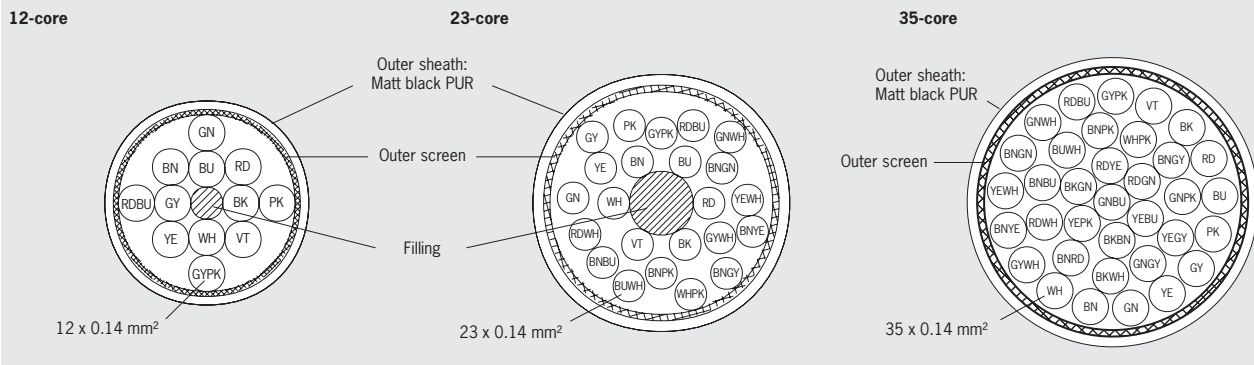

### Dimensions of coiled version

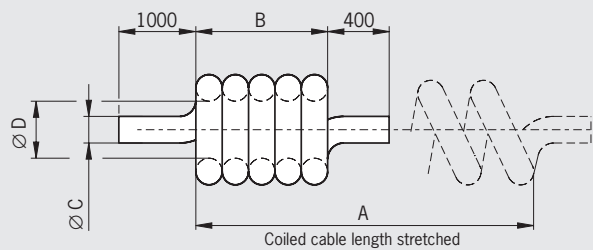

### Technical data


Parameter	Value	Unit	
Cable resistance	≤ 145	Ω/km	
Test voltage core / core	1.0	kVrms	
Test voltage core / screen	1.0	kVrms	
Insulation resistance	12-core and 23-core 35-core	≥ 200 ≥ 20	MΩ
Operating temperature	-10 ... +70	°C	
Bending radius	once several times	≥ 10 x cable diameter ≥ 15 x cable diameter	

### Ordering table

Item	Cable length [mm]	A [mm]	B [mm]	∅ C [mm]	∅ D [mm]	Order no.
12-core, coiled cable	3,900	Approx. 2,500	550 ± 20	6 ± 0.3	8 ± 2	<b>086721</b>
12-core, coiled cable	5,400	Approx. 4,000	880 ± 20	6 ± 0.3	8 ± 2	<b>086722</b>
12-core, straight cable	3,500	-	-	-	-	<b>087379</b>
12-core, straight cable	5,000	-	-	-	-	<b>087380</b>
12-core, straight cable	10,000	-	-	-	-	<b>087381</b>
23-core, coiled cable	3,900	Approx. 2,500	550 ± 20	7.5 ± 0.3	10 ± 2	<b>087408</b>
23-core, coiled cable	5,400	Approx. 4,000	880 ± 20	7.5 ± 0.3	10 ± 2	<b>087409</b>
23-core, straight cable	3,500	-	-	-	-	<b>087382</b>
23-core, straight cable	5,000	-	-	-	-	<b>087383</b>
23-core, straight cable	10,000	-	-	-	-	<b>087384</b>
35-core, coiled cable	3,900	Approx. 2,500	550 ± 20	8 ± 0.5	10 ± 2	<b>097190</b>
35-core, coiled cable	5,400	Approx. 4,000	880 ± 20	8 ± 0.5	10 ± 2	<b>097191</b>
35-core, straight cable	3,500	-	-	-	-	<b>097189</b>
35-core, straight cable	5,000	-	-	-	-	<b>097188</b>
35-core, straight cable	10,000	-	-	-	-	<b>097187</b>

## Cable gland with anti-kink spiral

Dimension drawing

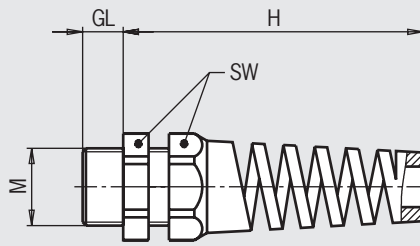

### Ordering table

Thread M	Use	Cable diameter	SW	GL	H
M16x1.5	Kit HBA/HBM	5 - 10	22	8	71
Pg 11	Kit HBL	5 - 10	22	11	71
Pg 13.5	Kit HBL	6 - 12	24	12.5	81

### Ordering table

Item	Order no.
Cable gland M16x1.5 with anti-kink spiral, color black	<b>083641</b>
Cable gland Pg 11 with anti-kink spiral and fixing nut, color black	<b>073982</b>
Cable gland Pg 13.5 with anti-kink spiral and fixing nut, color black	<b>073983</b>

## EMERGENCY STOP devices according to EN ISO 13850




- ▶ With pull-to-reset button
- ▶ EMERGENCY STOP device for housing HBA/HBM without enabling switch ZXE, 3-stage

### Notes

- ▶ The EMERGENCY STOP device engages when actuated by pressing, unlocks when pulled, and is overload-proof
- ▶ Do not use with housing HBA/HBM with 3-stage enabling switch ZXE

Dimension drawing

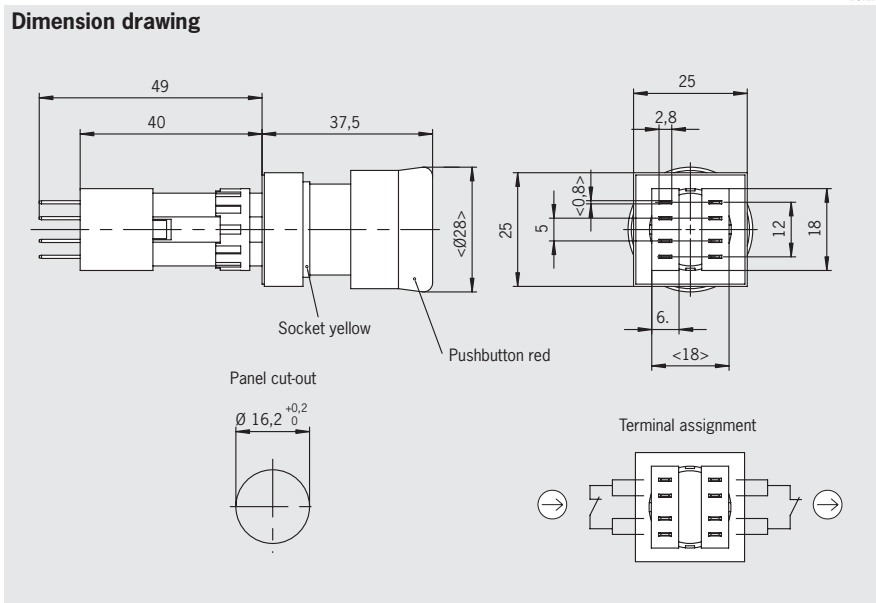

### Technical data


Parameter	Value	Unit
<b>Actuating element</b>		
Color of actuating button	Red	
Color of bottom part	Yellow	
Switching elements	2, one positively driven contact each	
Degree of protection	IP 65	
Utilization category according to IEC 947-5-1	DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 3 A	

- ▶ With turn-to-reset button
- ▶ EMERGENCY STOP device for housing HBA/HBM
- ▶ Bottom of housing yellow

### Notes

- ▶ The EMERGENCY STOP device engages when actuated by pressing, unlocks when turned or pulled, and is tamper proof

Dimension drawing

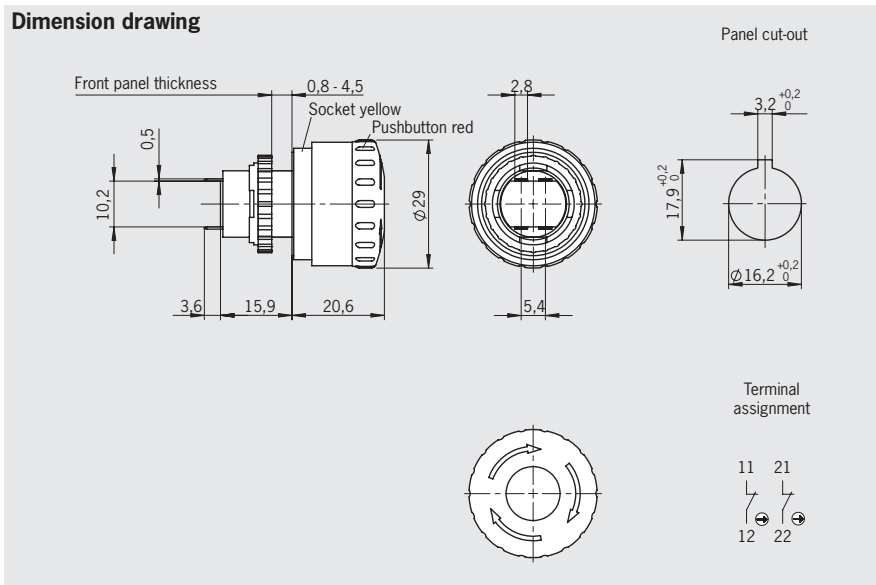

### Technical data

Parameter	Value	Unit
<b>Actuating element</b>		
Color of actuating button	Red	
Color of bottom part	Yellow	
Switching elements	2 positively driven contacts	
Degree of protection	IP 65	
Connection ratings	24 V DC / 3 A	

### Ordering table

Item	Order no.
EMERGENCY STOP device (pull-to-reset button) with 2 switching elements, 1 positively driven contact each, long design	<b>096298</b>
EMERGENCY STOP device (pull-to-reset button and turn-to-reset button), 2 positively driven contacts, short design	<b>106435</b>
Blind plug for EMERGENCY STOP device mounting hole	<b>083653</b>



## Enabling switch ZXE-091336, 3-stage, 2 NO contacts


### Notes

- ▶ Enabling switch ZXE-091336 for use in housing HBA/HBM (see page 31/33/35/39)

### Switching elements

- ▶ **2202** 2 NO

### Dimension drawing

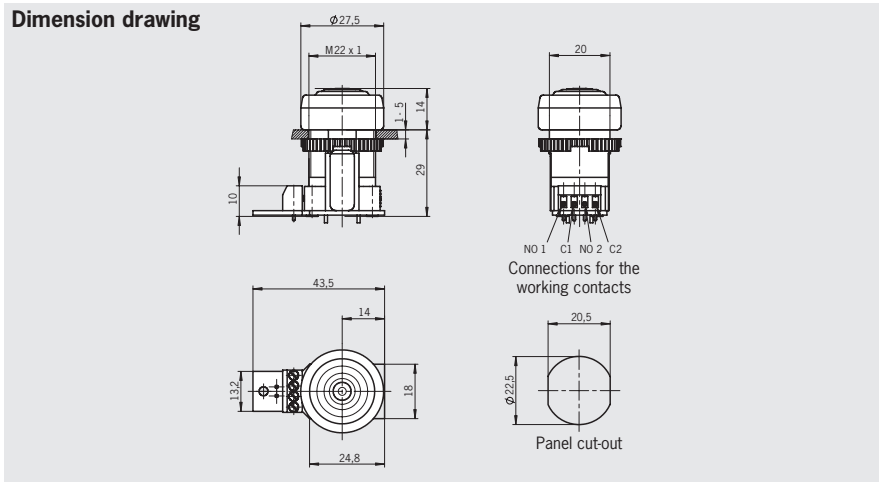

## Enabling switch ZXE-104833 with click, 3-stage, 2 NO contacts


### Notes

- ▶ Enabling switch ZXE-104833 for use in housing HBA/HBM (see page 31/33/35/39)
- ▶ A click sounds during the change from stage 1 to stage 2 and during the return from stage 2 to stage 1.


### Switching elements

- ▶ **2202** 2 NO

### Dimension drawing

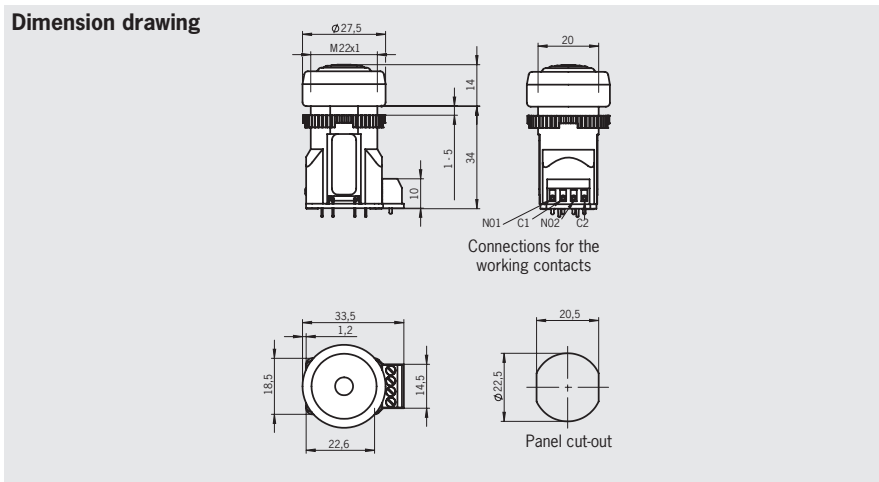

### Wiring diagrams/function sequence ZXE

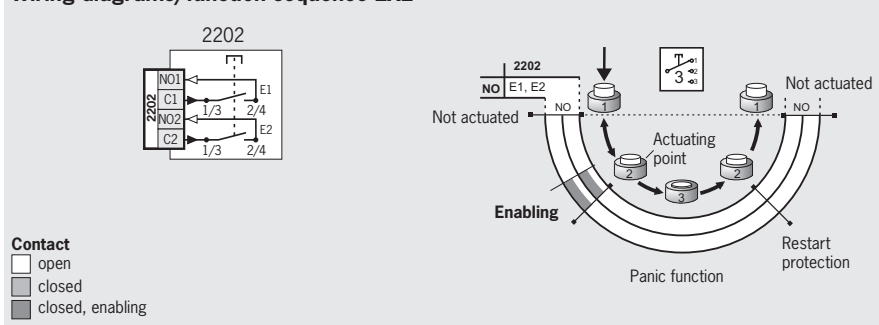

### Technical data

Parameter	Value	Unit
Housing material	Polyamide, black	
Protective cap material	CR (neoprene), black	
Degree of protection according to IEC 529	IP65 on front	
Ambient temperature	- 5 ... + 60	°C
Switching principle	Slow-action contact element	
Utilization category according to IEC 947-5-1	DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 0.1 A	
Weight	Approx. 0.03	kg

### Ordering table


Item	Particularity	Switching contacts	Switch type	Order no.
ZXE-091336	-	2 NO contacts	Dual-channel	<b>091336</b>
ZXE-104833	Click noise on operation	2 NO contacts	Dual-channel	<b>104833</b>

## EMERGENCY STOP device, 22 mm with pull-to-reset button according to EN ISO 13850

### Notes

- ▶ The EMERGENCY STOP device engages when actuated by pressing, unlocks when pulled, and is overload-proof
- ▶ Usage only for the following housings:
  - ▶ HBL-072631
  - ▶ HBL-072983
  - ▶ HBL-073113
  - ▶ HBL-083484

### Dimension drawing

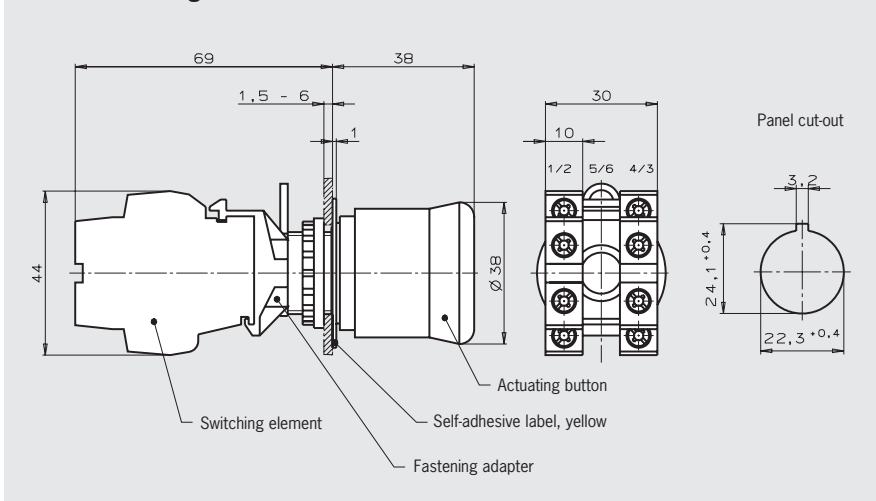

### Technical data

Parameter	Value	Unit
Color of actuating button	Red	
Color self-adhesive label	Yellow	
Switching element	2 NC contacts	
Utilization category according to IEC 947-5-1	DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 2.75 A	

### Ordering table

Item	Order no.
EMERGENCY STOP device, complete with switching elements (2 x NC contacts), pull-to-reset button	073985
Blind plug for EMERGENCY STOP device mounting hole	059622





## Enabling switch ZSE2-2, 3-stage, 1 positively driven contact


### Notes

- ▶ Enabling switch ZSE2-2 C1692 for use in housings HBL-073109 and HBL-072632 (see page 42)

### Switching elements

- ▶ **210** 2 NO + 1 NC ⊕

### Dimension drawing

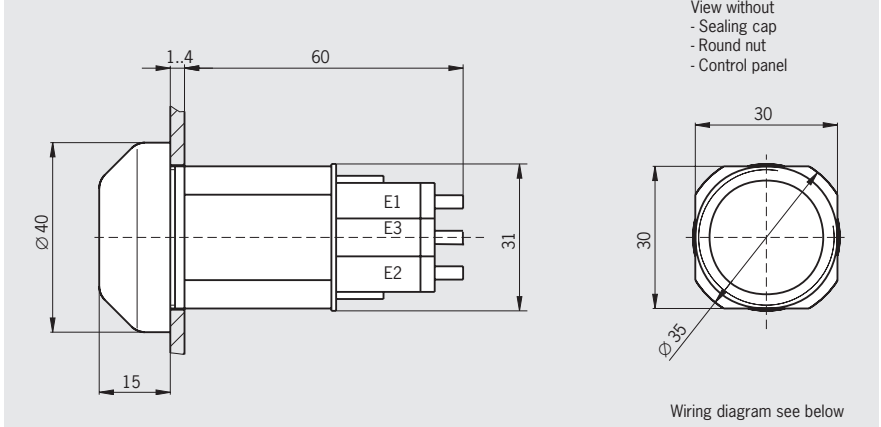

## Enabling switch ZSE2-4, 3-stage, 2 positively driven contacts


### Notes

- ▶ Enabling switch ZSE2-4 C1943 for use in housings HBL-072983 and HBL-083484 (see page 42)


### Switching elements

- ▶ **220** 2 NO + 2 NC ⊕

### Dimension drawing

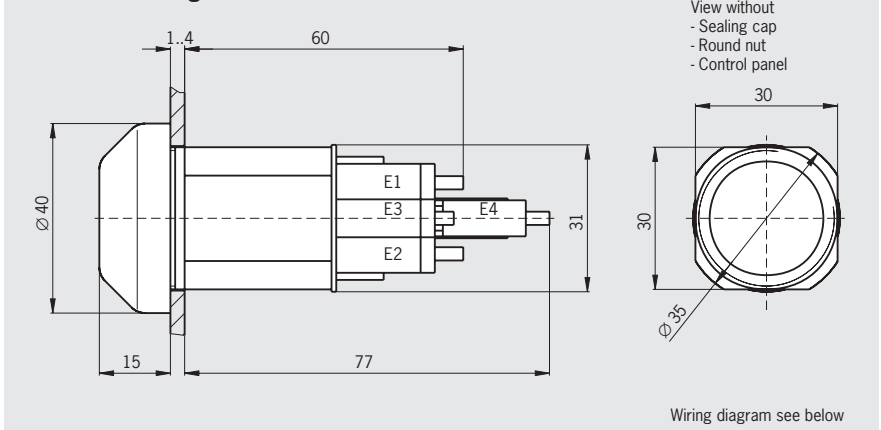

### Wiring diagrams/function sequence ZSE 2-2 and ZSE 2-4

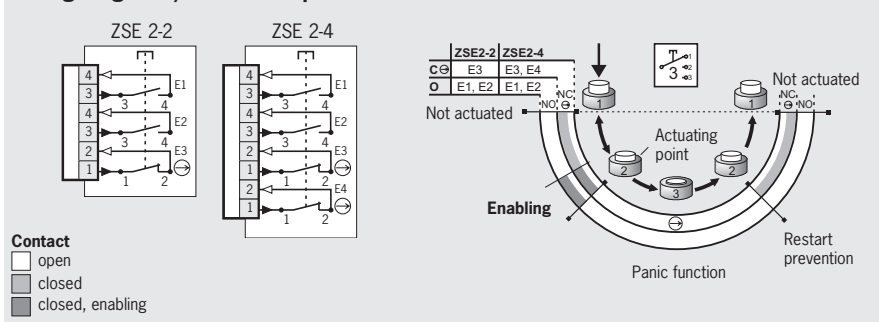

### Technical data

Parameter	Value	Unit
Housing material	Plastic	
Fastening hole	∅ 30.5 <sup>+0.5</sup>	mm
Degree of protection according to IEC 529	IP65 on front	
Ambient temperature	- 5 ... + 60	°C
Switching principle	Slow-action contact element	
Utilization category according to IEC 947-5-1	AC-15 U <sub>e</sub> 24 V I <sub>e</sub> 4 A DC-13 U <sub>e</sub> 24 V I <sub>e</sub> 3 A	
Weight	Approx. 0.1	kg

### Ordering table

Item	Switching contacts	Switch type	Order no.
ZSE2-2 C 1692	2 NO contacts + 1 pos. driven contact	Single-channel	<b>070752</b>
ZSE2-4 C 1943	2 NO contacts + 2 pos. driven contact	Dual-channel	<b>083477</b>

## Holder HBA

### Technical data


Parameter	Value	Unit
Housing material	Plastic	
Fixing system	Screws	
Ambient temperature	-5 to +60	°C
Weight	Approx. 0.1	kg

### Ordering table

Item	Order no.
Holder HBA gray	<b>072828</b>
Holder HBA black	<b>100221</b>
Holder HBA gray, enlarged handwheel cut-out *	<b>072935</b>
Holder HBA black, enlarged handwheel cut-out *	<b>109979</b>

\* Operation of the handwheel in the holder possible

### Dimension drawing

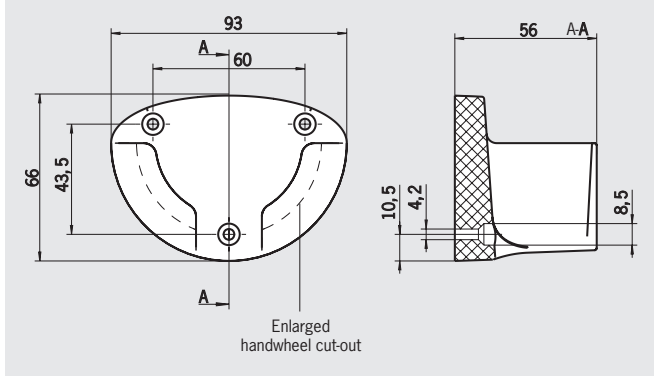

## Holder HBM


### Technical data

Parameter	Value	Unit
Housing material	Plastic	
Fixing system	Screws	
Ambient temperature	-5 to +60	°C
Weight	Approx. 0.1	kg

### Ordering table

Item	Order no.
Holder HBM	<b>112335</b>

### Dimension drawing

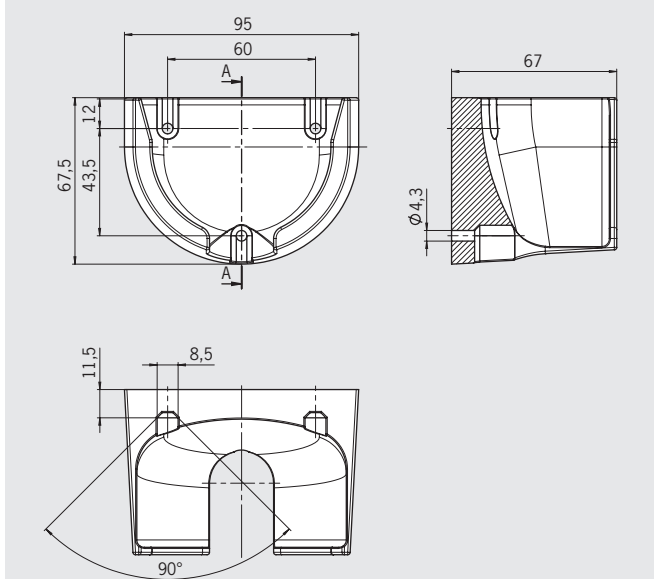

## Holder HBL

### Technical data

Parameter	Value	Unit
Housing material	Plastic	
Fixing system	Screws	
Ambient temperature	-5 to +60	°C
Weight	Approx. 0.1	kg

### Ordering table

Item	Order no.
Holder HBL	<b>084397</b>

### Dimension drawing

