

CH and MH C-TYPE standard version

inserts		page:
CD	50 poles + ⊕	71
CDD	76 poles + ⊕	80
CDA	32 poles + ⊕	102
CSAH	32 poles + ⊕	103
CDC	32 poles + ⊕	106

insert dimensions:
2 x (66 x 16) mm

bulkhead mounting housings with 2 levers or 4 pegs




surface mounting housings with 2 levers or 4 pegs




description	part No.	part No.	entry Pg	part No.	entry M
with levers	CHI 50				
with pegs and cover 1)	CHI 50 CS				
with levers		CHP 50.21	21	MHP 50.32	32
with levers		CHP 50.221	21 x 2	MHP 50.232	32 x 2
with levers		CHP 50.29	29	MHP 50.40	40
with levers		CHP 50.229	29 x 2	MHP 50.240	40 x 2
with pegs and cover 1)		CHP 50 CS	21	MHP 50 CS32	32
with pegs and cover 1)		CHP 50 CS2	21 x 2	MHP 50 CS232	32 x 2
with pegs and cover 1)		CHP 50 CS29	29	MHP 50 CS40	40
with pegs and cover 1)		CHP 50 CS229	29 x 2	MHP 50 CS240	40 x 2

1) may be combined with enclosures:
- CHO/CAO 50 X and CAV 50 X
- MHO/MAO/MFO 50 X and MAV/MFV 50 X


panel cut-out for bulkhead mounting housings

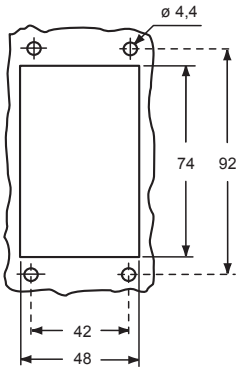


CHI

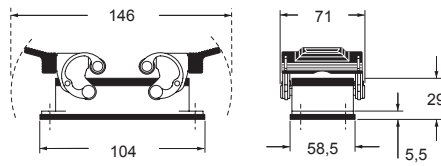


CHI CS

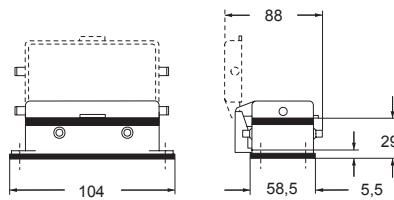

CHP and MHP

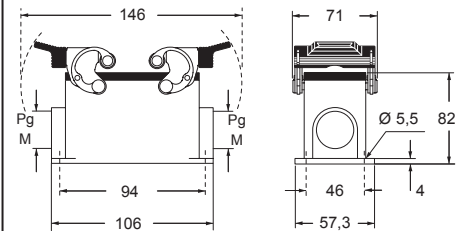

CHP CS and MHP CS

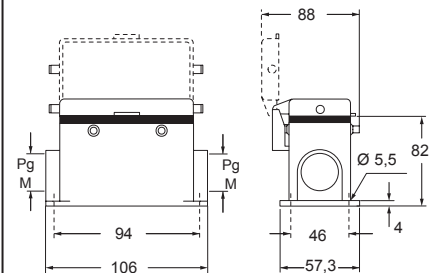

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers. The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CEC® Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts

CD	50 poles + ⊕
CDD	76 poles + ⊕
CDA	32 poles + ⊕
CSAH	32 poles + ⊕
CDC	32 poles + ⊕

page:

71
80
102
103
106

insert dimensions:
2 x (66 x 16) mm

hoods with 4 pegs




hoods with 2 levers or 4 pegs




description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	CHO 50	21	MHO 50.25	25				
with pegs, side entry			MHO 50.32	32				
with pegs, side entry, high construction	CAO 50.21	21	MAO 50.25	25				
with pegs, side entry, high construction	CAO 50.29	29	MAO 50.32	32				
with pegs, top entry, high construction					CAV 50.21	21	MAV 50.25	25
with pegs, top entry, high construction					CAV 50.29	29	MAV 50.32	32
with levers and gasket, top entry, high construction					CAV 50 G29	29	MAV 50 G32	32
with pegs, side entry, high construction, without adapter 1)	CFO 50.21	21	MFO 50.25	25				
with pegs, side entry, high construction, without adapter 1)	CFO 50.29	29	MFO 50.32	32				
with pegs, top entry, high construction, without adapter 1)					CFV 50.21	21	MFV 50.25	25
with pegs, top entry, high construction, without adapter 1)					CFV 50.29	29	MFV 50.32	32
with levers and gasket, top entry, high, without adapter 1)					CFV 50 G29	29	MFV 50 G32	32

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


CHO (CAO/CFO) and MHO (MAO/MFO)




CAV (CFV) and MAV (MFV)

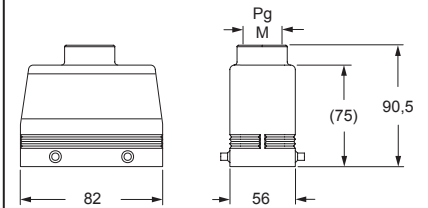


CAV G (CFV G) and MAV G (MFV G)

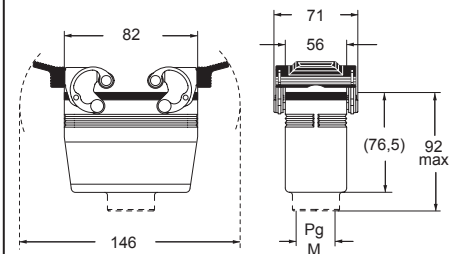

CAIUS® Type 4/4X/12

 insulating cable gland or fittings without gasket

 cable gland with O-Ring gasket

C-TYPE

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	50 poles + ⊕	71
CDD	76 poles + ⊕	80
CDA	32 poles + ⊕	102
CSAH	32 poles + ⊕	103
CDC	32 poles + ⊕	106

insert dimensions:
2 x (66 x 16) mm

Covers
cannot be used together
with metal coding pins.

hoods with 2 levers



covers




description	part No.	entry Pg	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with levers, side entry ¹⁾	CHO 50 X	21	MHO 50 X25	25		
with levers, side entry ¹⁾			MHO 50 X32	32		
with levers, side entry, high construction ¹⁾	CAO 50 X	21	MAO 50 X25	25		
with levers, side entry, high construction ¹⁾	CAO 50 X29	29	MAO 50 X32	32		
with levers, top entry, high construction ¹⁾	CAV 50 X	21	MAV 50 X25	25		
with levers, top entry, high construction ¹⁾	CAV 50 X29	29	MAV 50 X32	32		
with levers, side entry, high construction, without adapter ^{1) 2)}	CFO 50 X	21	MFO 50 X25	25		
with levers, side entry, high construction, without adapter ^{1) 2)}	CFO 50 X29	29	MFO 50 X32	32		
with levers, top entry, high construction, without adapter ^{1) 2)}	CFV 50 X	21	MFV 50 X25	25		
with levers, top entry, high construction, without adapter ^{1) 2)}	CFV 50 X29	29	MFV 50 X32	32		
with 4 pegs (for enclosures with 2 levers)					CHC 50	CHC 50 S
with 2 levers and gasket (for hoods with 4 pegs)						CHC 50 G


¹⁾ may be combined with enclosures:
- CHI 50 CS, CHP 50 CS and MHP 50 CS

²⁾ enclosure without adapter, threaded on the body,
to be used only with a complete cable gland.


CHO X (CAO X/CFO X) and MHO X (MAO X/MFO X)

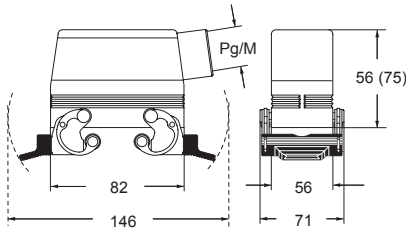


CAV X (CFV X) and MAV X (MFV X)

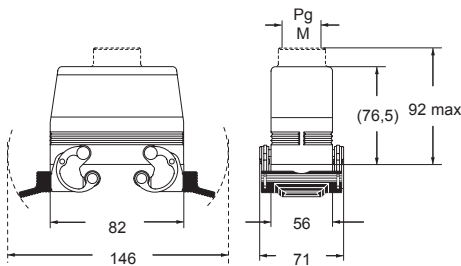

CHC(S)



CHC G

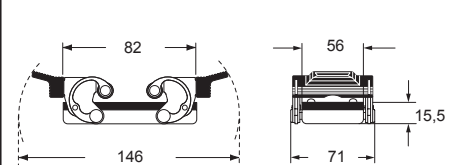


CEC® Type
4/4X/12


IP65 insulating cable gland or fittings
without gasket

IP66 IP69 cable gland
with O-Ring gasket

For fixing on housings



For fixing on hoods



CAC C-TYPE standard version

inserts		page:
CD	50 poles + ⊕	71
CDD	76 poles + ⊕	80
CDA	32 poles + ⊕	102
CSAH	32 poles + ⊕	103
CDC	32 poles + ⊕	106

insert dimensions:
2 x (66 x 16) mm

hoods without entry, to be drilled




description

part No.
with 4 pegs

with pegs, high construction

CAC 50



C-TYPE

CAUS® Type
4/4X/12

