

# CH C-TYPE standard version

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CT, CTSE (16A) *)	6 poles + ⊕	160
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

\*) can be used only in bulkhead mounting housings

## bulkhead mounting housings with single lever




## bulkhead mounting housings with 2 pegs



description	part No.	part No.
with lever	<b>CHI 06 L</b>	
with lever and cover	<b>CHI 06 LS</b>	
with pegs 1)		<b>CHI 06 LC</b>
with pegs and aluminum cover 1)		<b>CHI 06 LCS</b>
with pegs and plastic cover 1)		<b>CHI 06 LCP</b>


1) may be combined with enclosures:  
 - CHO/CHV 06 LX  
 - MHO/MHV 06 LX

panel cut-out for bulkhead mounting housings




**Q IMPORTANT NOTE:** The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.  
 The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.


### CHI L ▲

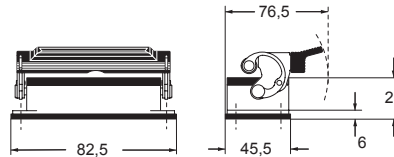


### CHI LS ●

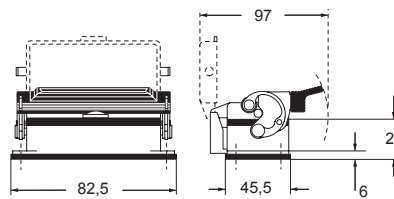

### CHI LC ▲

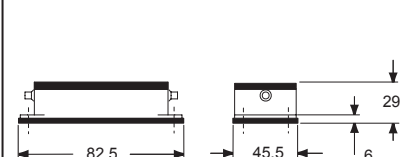

### CHI LCS/LCP ●

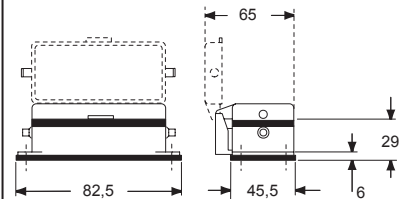

**CAUS** Type 4/4X/12  
 (except enclosures with plastic cover)



# CH - CA and MH - MA C-TYPE standard version

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

## surface mounting housings with single lever



## angled surface mounting housings with single lever




description	part No.	entry Pg	part No.	entry M	part No.	entry M
with lever	CHP 06 L	16	MHP 06 L20	20		
with lever	CHP 06 L2	16 x 2	MHP 06 L220	20 x 2		
with lever, high construction 1)			MAP 06 L25	25		
with lever, high construction 1)			MAP 06 L225	25 x 2		
with lever, high construction	CAP 06 L	21	MAP 06 L32	32		
with lever, high construction	CAP 06 L2	21 x 2	MAP 06 L232	32 x 2		
with lever, high construction	CAP 06 L29	29	MAP 06 L40	40		
with lever, high construction	CAP 06 L229	29 x 2	MAP 06 L240	40 x 2		
with lever and cover	CHP 06 LS	16	MHP 06 LS20	20		
with lever and cover	CHP 06 LS2	16 x 2	MHP 06 LS220	20 x 2		
with lever and cover, high construction	CAP 06 LS	21	MAP 06 LS32	32		
with lever and cover, high construction	CAP 06 LS2	21 x 2	MAP 06 LS232	32 x 2		
with lever and cover, high construction	CAP 06 LS29	29	MAP 06 LS40	40		
with lever and cover, high construction	CAP 06 LS229	29 x 2	MAP 06 LS240	40 x 2		
with lever, cable gland entry, closed bulkhead 1) 2)					MAV 06LG25-F	25


1) be used only with a complete cable gland (to be purchased separately).  
 2) versions with M32, Pg 21 or Pg 29 entry on request.

**Q IMPORTANT NOTE:** The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers. The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.


### CHP L - CAP L and MHP L - MAP L ▲

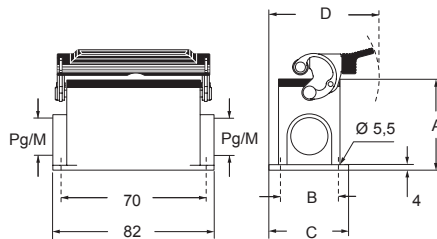

### MAV 06LG25-F ▲

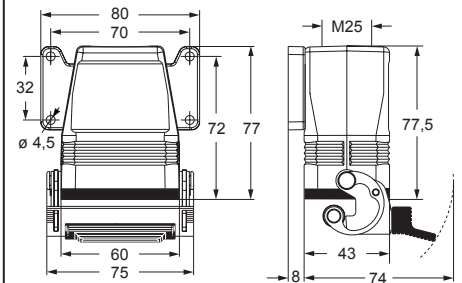

### CHP LS - CAP LS and MHP LS - MAP LS ●

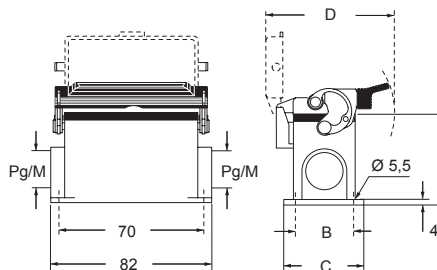

type	A	B	C	D
CHP L / MHP L	53	40	52	79,5
CAP L / MAP L	74	45	57	82
CHP LS / MHP LS	53	40	52	97
CAP LS / MAP LS	74	45	57	97

**CALUS** Type 4/4X/12



▲ insulating cable gland or fittings without gasket



▲ cable gland with O-Ring gasket

# CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

## hoods with 2 pegs



## hoods with 2 pegs

M40 cable entry with 20 mm thread length



description	part No.	entry Pg	part No.	entry M	part No.	entry M
with pegs, side entry	<b>CHO 06 L13</b>	13,5	<b>MHO 06 L20</b>	20		
with pegs, side entry	<b>CHO 06 L16</b>	16	<b>MHO 06 L25</b>	25		
with pegs, side entry, high construction	<b>CAO 06 L21</b>	21	<b>MAO 06 L25</b>	25		
with pegs, side entry, high construction	<b>CAO 06 L29</b>	29	<b>MAO 06 L32</b>	32		
with pegs, side entry, high construction, without adapter <sup>1)</sup>	<b>CFO 06 L21</b>	21	<b>MFO 06 L25</b>	25		
with pegs, side entry, high construction, without adapter <sup>1)</sup>	<b>CFO 06 L29</b>	29	<b>MFO 06 L32</b>	32		
with pegs, side entry, high construction, without adapter <sup>1)</sup>					<b>MFO 06 L40</b>	40
with pegs, top entry <sup>2)</sup>	<b>CHV 06 L13</b>	13,5				
with pegs, top entry <sup>2) 3)</sup>			<b>MHV 06 L20</b>	20		
with pegs, top entry <sup>2)</sup>	<b>CHV 06 L16</b>	16	<b>MHV 06 L25</b>	25		
with pegs, top entry, high construction	<b>CAV 06 L21</b>	21	<b>MAV 06 L25</b>	25		
with pegs, top entry, high construction	<b>CAV 06 L29</b>	29	<b>MAV 06 L32</b>	32		
with pegs, top entry, high construction, without adapter <sup>1)</sup>	<b>CFV 06 L21</b>	21	<b>MFV 06 L25</b>	25		
with pegs, top entry, high construction, without adapter <sup>1)</sup>	<b>CFV 06 L29</b>	29	<b>MFV 06 L32</b>	32		
with pegs, top entry, high construction, without adapter <sup>1)</sup>					<b>MFV 06 L40</b>	40

<sup>1)</sup> enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

<sup>2)</sup> cannot be used with MIXO series.


<sup>3)</sup> can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.


Alternatively, hoods with pegs may be coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 387 to page 391
- C7, IP66/IP67/IP69 stainless steel lever, page 436
- CV, IP65 or IP66/IP69 stainless steel lever, page 444 and 445


### CHO L (CAO L) and (CFO L) MHO L (MAO L) and (MFO L)

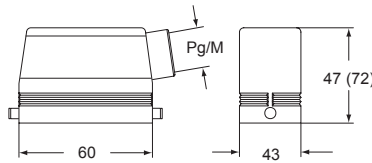


### CHV L (CAV L) and [CFV L] MHV L (MAV L) and [MFV L]

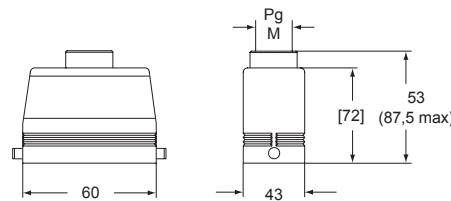

### MFO 06 L40

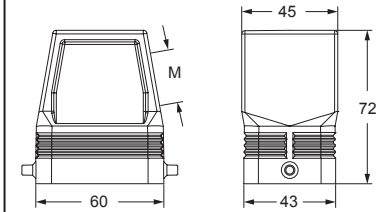

### MFV 06 L40

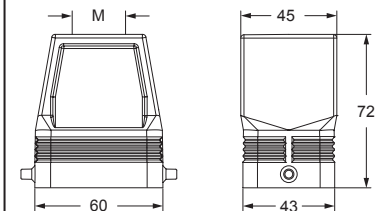

**CALUS** Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket  
IP67 if hoods without adapters coupled with IP67 housings

**CH - CA - CF and MH - MA - MF C-TYPE standard version**

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

hoods with 1 lever




hoods with 1 lever  
M40 cable entry with 20 mm thread length




description	part No.	entry Pg	part No.	entry M	part No.	entry M
with lever, top entry	<b>CHV 06 LG</b>	16	<b>MHV 06 LG25</b>	25		
with lever, top entry, high construction	<b>CAV 06 LG21</b>	21	<b>MAV 06 LG25</b>	25		
with lever, top entry, high construction	<b>CAV 06 LG29</b>	29	<b>MAV 06 LG32</b>	32		
with lever, side entry, high construction, without adapter 1)					<b>MFO 06 LG40</b>	40
with lever, top entry, high construction, without adapter 1)	<b>CFV 06 LG21</b>	21	<b>MFV 06 LG25</b>	25		
with lever, top entry, high construction, without adapter 1)	<b>CFV 06 LG29</b>	29	<b>MFV 06 LG32</b>	32		
with lever, top entry, high construction, without adapter 1)					<b>MFV 06 LG40</b>	40

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


**CHV LG (CAV LG) and [CFV LG]  
MHV LG (MAV LG) and [MFV LG]**

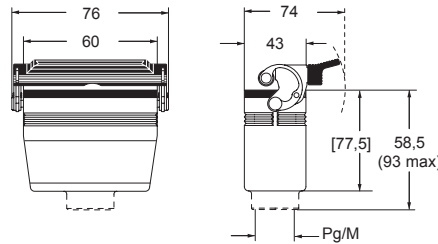


**MFO 06 LG40**

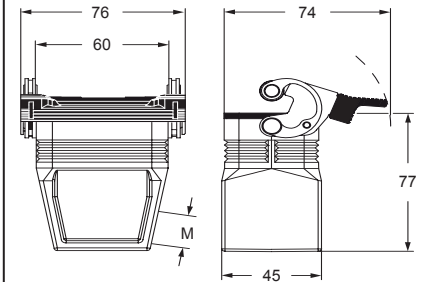


**MFV 06 LG40**

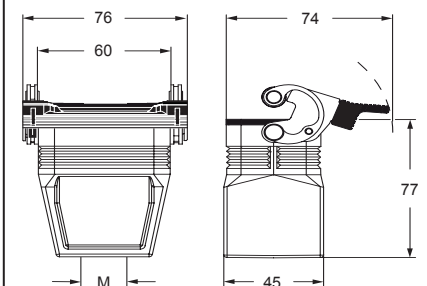

**CAIUS**® Type 4/4X/12

 insulating cable gland or fittings without gasket

 cable gland with O-Ring gasket

# CH and MH C-TYPE standard version

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

## hoods with 1 lever



## covers



description	part No.	entry Pg	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with lever, without gasket, side entry <sup>1)3)</sup>	<b>CHO 06 LX16</b>	16	<b>MHO 06 LX20</b>	20		
with lever, without gasket, side entry <sup>1)3)</sup>			<b>MHO 06 LX25</b>	25		
with lever, without gasket, top entry <sup>1)3)</sup>	<b>CHV 06 LX16</b>	16	<b>MHV 06 LX20</b>	20		
with lever, without gasket, top entry <sup>1)3)</sup>			<b>MHV 06 LX25</b>	25		
with lever (for hoods with pegs)						<b>CHC 06 LG</b>
with pegs (for enclosures with lever)					<b>CHC 06 L</b>	<b>CHC 06 SL</b>
with pegs and gasket (for hoods with lever) <sup>2)</sup>						<b>CHC 06 LC</b>

<sup>1)</sup> may be combined with enclosures:  
CHI 06 LCS/LCP/LC


<sup>2)</sup> may be combined with enclosures:  
- CHO/CHV 06 LX  
- MHO/MHV 06 LX

<sup>3)</sup> cannot be used with MIXO series


**CHCP 06**  
dust protection cover  
(page 696)




### CHO LX and MHO LX

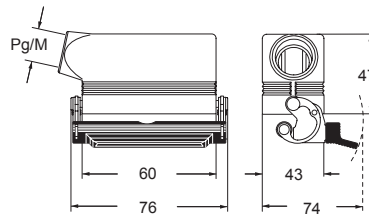


### CHV LX and MHV LX

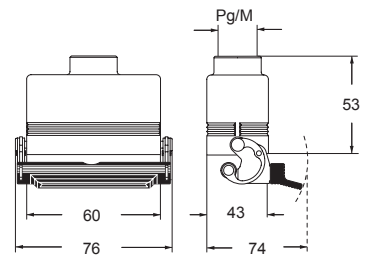


### CHC LG

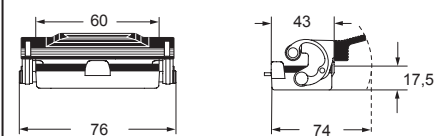


### CHC L (SL)

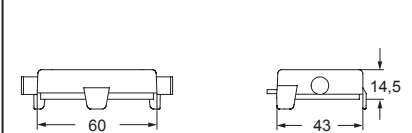


### CHC LC



**For fixing on housings**



**For fixing on hoods**



**CUUS** Type 4/4X/12



# CAC C-TYPE standard version

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

hoods without entry, to be drilled



description


part No.  
(with 2 pegs)

with pegs, high construction

**CAC 06 L**

Alternatively, hoods with pegs are coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 387 to page 391
- C7, IP66/IP67/IP69 stainless steel lever, page 436
- CV, IP65 or IP66/IP69 stainless steel lever, page 444 and 445



**CAIUS**® Type 4/4X/12



IP67 if coupled with IP67 hood or cover