Empty enclosure

TK PS 2518-9-m

TK PS 2518-9-m

Empty enclosure

CUSTOMIZABLE

Productnumber: 10540801
Dimensions: 254 x 180 x 90 mm

Empty enclosure IP66 polysterene

Box and cover, polystyrene, grey similar to RAL 7035, metric pre-embossings

IP66 IK07 690V AC 1000V DC

To industrial product:
https://www.spelsberg.com/p/12740801

Technical Data

electrical characteristics

Protection type UL:	not specified
Rated insulation voltage AC:	690 V
Rated insulation voltage DC:	1000 V
Type of protection:	IP66
vented:	no
Protection class:	II

Colours

Base unit colour:	grey
Cover colour:	grey

Dimensions

Width:	254 mm

Dimensions

Length:	180 mm
Height:	90 mm

Material characteristics

suitable for exterior use:	no
Flammability class according with UL94:	HB
Glow-wire flammability according to EN 60695-2-11:	650 °C
Halogen free:	yes
Industry quality:	no

Created at 19.05.2021. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

mechanical properties

Type of fastening:	Wall/ceiling mounting
Sealable:	yes
Cover screw torque:	1.2 Nm
Flange variant:	no
Stackable:	yes
Impact strength:	IK07

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Material

Base unit material:	Polystyrene
Cover material:	Polystyrene
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Accessories

19000101 - HBA - Mounting material

19000501 - ASS-gro - External hinge set

19400101 - TK ABL - External fixing lugs kit

19500801 - TK MPI-2518 - Mounting plate

19821601 - NS 35-216 - Standard rail

Created at 19.05.2021. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

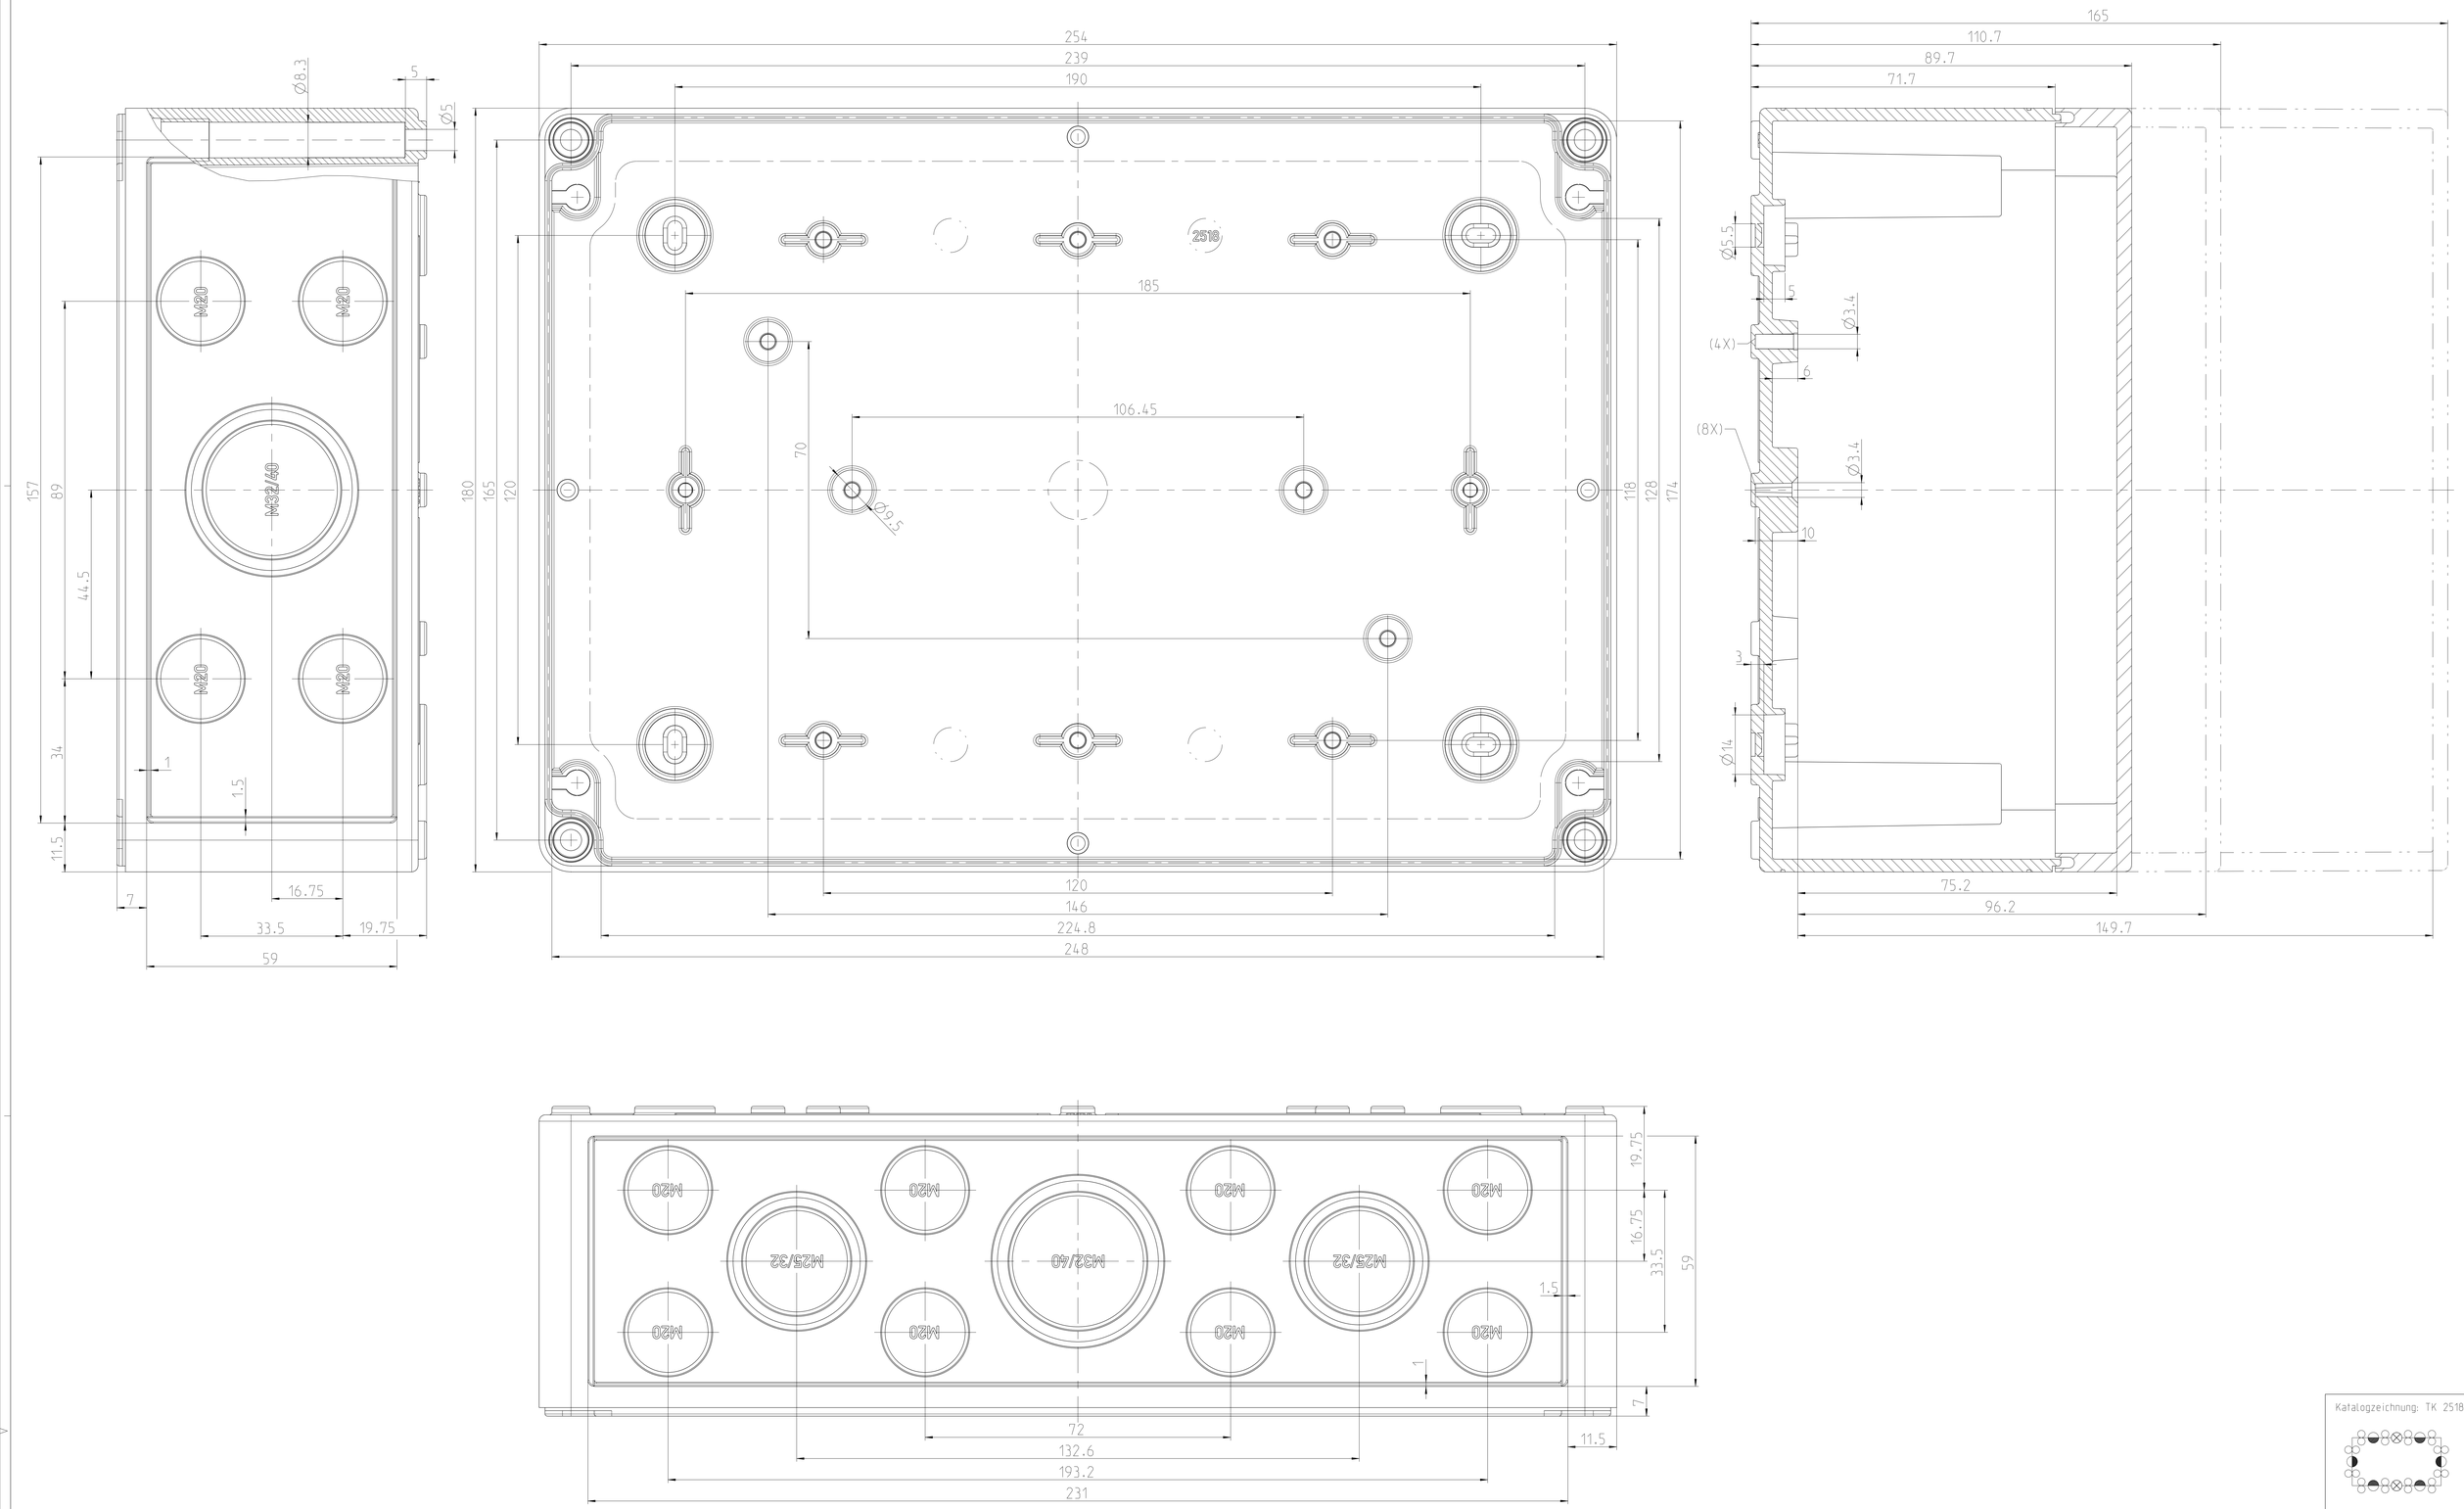

Katalogzeichnung: TK 2518

- MetrischerTyp: M20
- Metrische Typen: M25/32
- Metrische Typen: M32/40
- Pg Typ: PG 16
- PG Typen: PG 21/16
- Pg Typen: Pg 29/21

(Verwendungsbereich)	(Zul.:Abw.)	(Oberflaeche)	Maßstab 4:5	(Volumen in cm³)	
			(Werkstoff,Halbzeug)		
Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.		Datum / Name	(Benennung) Massblatt TK 2518		
	Bearb.:	26.02.08 / WSP			
	Geor.:	29.05.12 / MSu			
	Vers.:				
	Status:	Freigabe			
			(Zeichnungsnummer) M-TK-2518		Blatt 1
1	Ae OTL-12	29.05.12 / WSP	ds spelsberg		AO B1
Zust.	Aenderung	Datum / Name	(Ersatz fuer:) Zeichnung v.11.07.2005(ME10)		

(Dateiname Modell) M-TK-2518 (Dateiname Zeichnung) M-TK-2518